

BIG WHITE®

SLV LIGHTING CATALOGUE 2024

 SLV

EXPERIENCE LIGHT



WELL INFORMED

Scan QR code, select country and get our latest prices.
Visit us at **slv.com**

FAMILY HIGHLIGHTS

NUMINOS®	82
NEW TRIA®	122
MEDO®	148
LALU®	176
ONE®	186

INDOOR

 Recessed lights	202
 Ceiling lights	248
 Pendant lights	278
 Wall lights	320
 Wall and ceiling lights	390
 Table and floor lamps	434
 48V system	454
 Low-voltage cable system	480
 High-voltage track 1-phase	492
 High-voltage track 3-phase	524
 Profile solutions and LED strips	564

OUTDOOR

 Mobile lights and floor lights	594
 Spotlights	686
 Wall lights	704
 Ceiling lights	786
 Wall and ceiling lights	802
 Recessed lights	818
 Recessed floor lights	828

ACCESSORIES

 Lamps	858
 Accessory parts	866

NAVIGATION


Editorial and references	4
Index, Application	14
Index, Families	46
Index, Numerical	882
Index, Alphabetical	892

NEW NAVIGATION

CATEGORY OVERVIEW

Everything at a glance.

Find the right lights based on category.

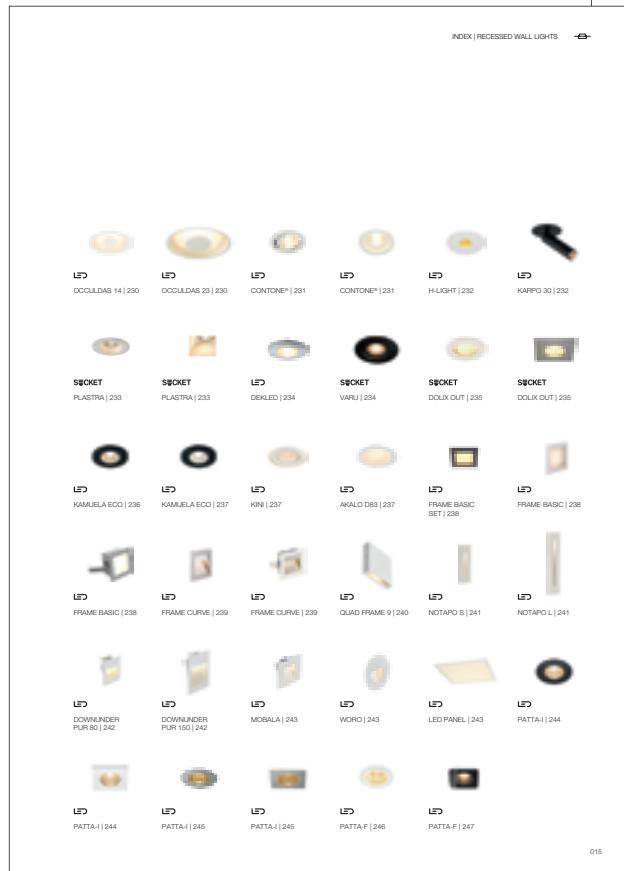

FAMILY OVERVIEW

Discover all lights within a family for a well-rounded lighting design.


PRODUCT CATEGORIES

Know how long it lasts. The new icons and colours let you quickly and easily navigate to the respective product categories.



RECOMMENDATIONS

Fast and simple. Discover the right accessories and lamps for your selected products.

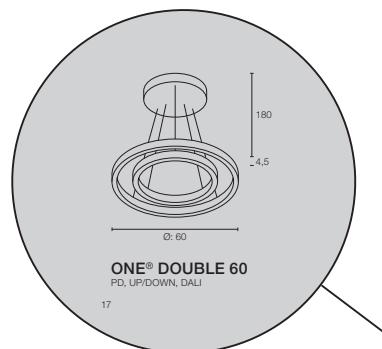

PLEASE NOTE

All measurements are given in **cm**.

CLEARLY EXPLAINED

In our new advice section, important information about lighting and our SLV products is explained clearly and concisely.

From planning tools and system representations to lighting knowledge, you'll learn everything in this BIG WHITE®. Take note of this when browsing our yellow advice pages, too.

DESIGN YOUR LED PROFILE




We recommend a new feed-in for double-sided lengths over 3 m and from 5 m

Create accents or illuminate entire rooms – available with up to 700 lm per 5 m.

Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

Frosted, opaque or transparent, iridescent – Choose from different colors for a more personal touch.

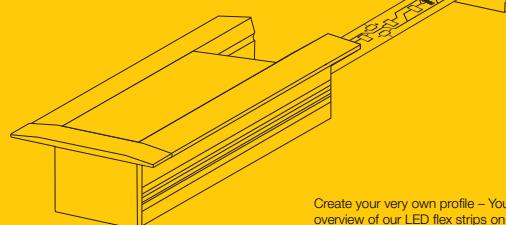

Create your very own profile – You will find an overview of our LED flex strips on pages 592-593. Matching drivers are presented on our Accessories pages 866-881.

For indoors, outdoors and wet rooms – With IP20 and IP54, equipped for

Whether a standard or flat surface, recessed profile or corner profile: right profile for your project.

With lengths from 5 m to 80 m, the limits – increase or shorten as desired. Thanks to 24V technology, you can use long lengths with fewer feed-in points.

580



ALL PRODUCTS DIRECT ONLINE

At **slv.com** you will find the complete SLV range with all product details, descriptions, availability, and much more. Useful design files, 3D data, configurators and calculation tools such as FastCalc by DIAL are there to help you create your perfect lighting design.

VILLA WALDFEUCHT

A HOUSE FULL OF SLV LIGHTS

An Instagram channel that follows the adventures of a young couple building their own home.

Why the two decided on luminaires from SLV and what hurdles they had to overcome are reported daily on their channel.




WELL THOUGHT-OUT LIGHTING DESIGN

When planning the lighting, it was important for the two developers to establish a uniform style throughout the entire house. In addition, the lighting was to be permanently adapted to the later use – in other words, to ensure maximum flexibility.

Smart GU10 lamps were to be fitted in the luminaires. In addition, Susanna and Marc wanted a mixture of direct and indirect lighting that would also showcase works of art in the perfect light. For all these reasons, Susanna and Marc opted for tracks from SLV. Hardly any type of lighting offers more flexibility: with tracks, all luminaires can be exchanged, added or aligned differently.

What's more, when it comes to energy efficiency, power track is also impressive: with indirect lighting and smart control, electricity can be saved.

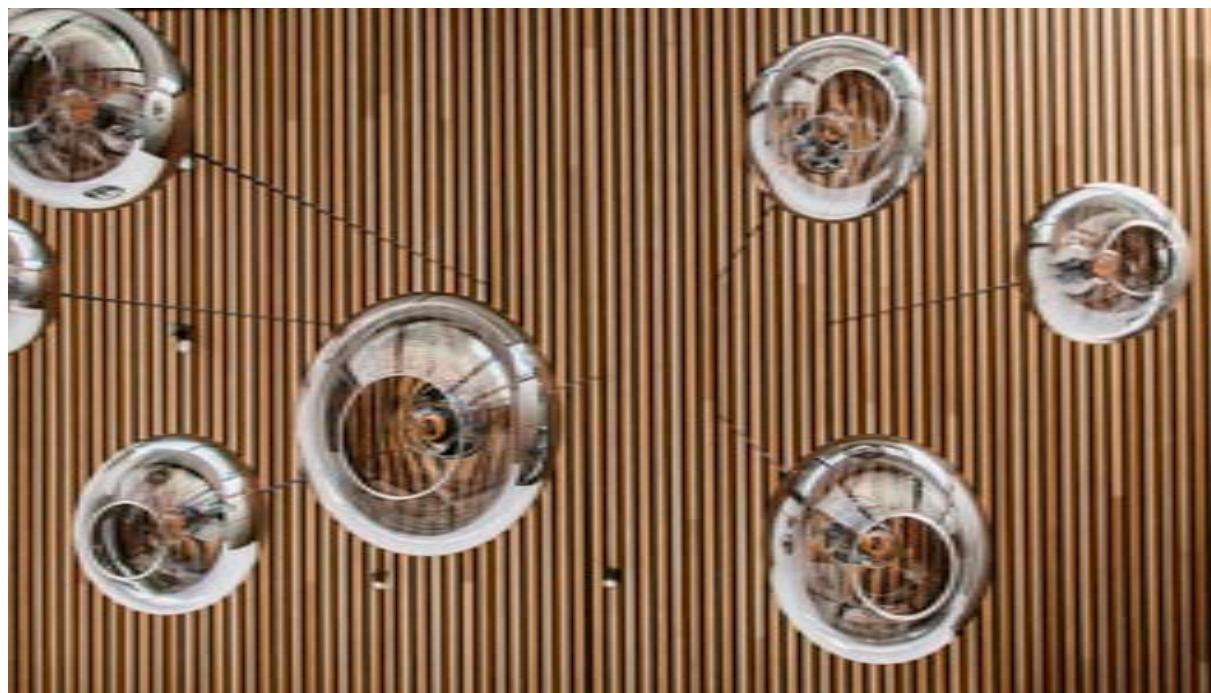

Susanna and Marc Mevißen have been sharing their progress with their followers since the groundbreaking ceremony in 2020 right up to the completion this year.

It is particularly noteworthy that, apart from the shell of the house, they did everything themselves. Despite the work on the house, which took place after the actual work of the two, they paid special attention to sustainable building, energy efficiency and sophisticated design. The result: after only 22 months, the house was already ready for occupancy.


„WE OPTED FOR SLV RIGHT FROM THE START AND THAT MADE THE LIGHTING DESIGN VERY EASY FOR US.“

Marc Mevißen, Architect

SERVICE AND QUALITY FROM SLV

There is a reason why Susanna and Marc chose luminaires from SLV: Marc Mevißen already knew SLV from his studies of architecture, when he became involved with light and shadow in the showroom.

When planning the lighting for their own dream house, the two influencers were particularly convinced by the design and the attractive price-performance ratio of the tracks. Added to this was the good support and fast service from SLV.

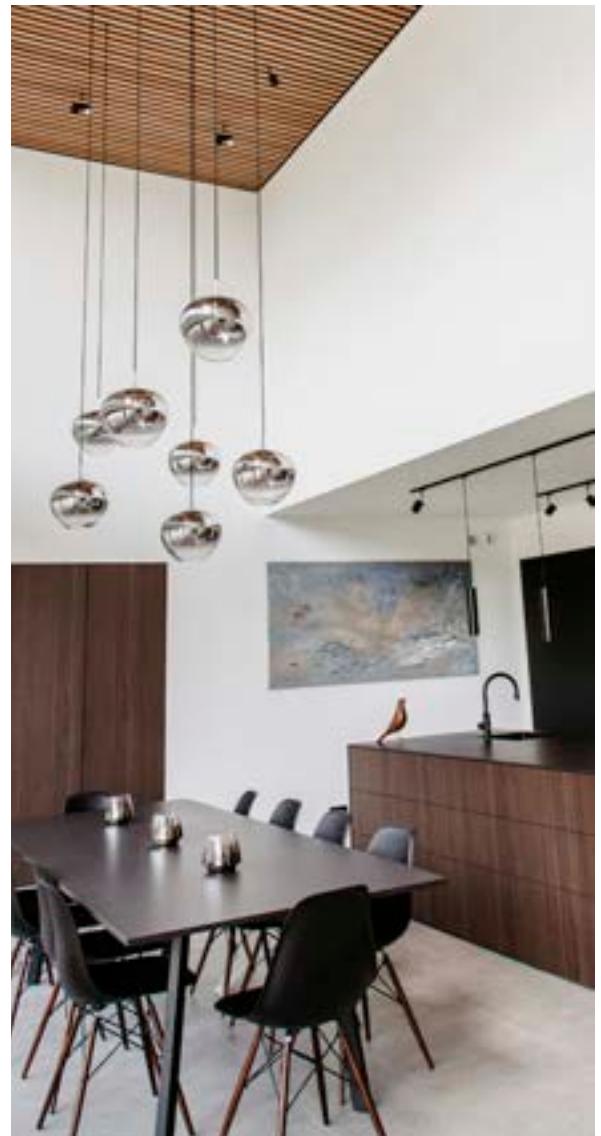



LIGHT AS A WORK OF ART

The dining room of Susanna and Marc's house has a large air space with a height of 5.65 m. Above the dining table, the couple wanted to create a kind of sculpture made of luminaires. As a basic construction, busbars were invisibly integrated into the acoustic ceiling in order to remain as flexible as possible.

To come up with ideas, the team from SLV worked with the clients on site for inspiration and presented many new luminaires.

„The PANTILO from SLV appealed to us best in terms of design in order to aesthetically fill the air space without glare,“ explains Susanna Mevißen.

„We love this reflection in the luminaires very much and they round off our concept.“

The PANTILO pendant light impresses with its extraordinary appearance: the shade made from chrome-plated glass can be easily combined into a stylish group of luminaires by means of individual configuration.

The seven PANTILO luminaires above the large dining table perfectly match the high wooden ceiling, the light-coloured walls, the grey floor and the black window frames in Susanna and Marc's house.

*„LUMINAIRES ARE NOT ONLY FUNCTIONAL –
THEY CAN ALSO GIVE A ROOM AN IDENTITY
AS A WORK OF ART.“*

Susanna Mevißen

INDIRECT LIGHT FOR A PLEASANT LIVING AMBIENCE

The house is not only equipped with lighting from SLV on the ceilings: spots are also integrated into the floor, where the colours can be individually adjusted. The two developers rely on indirect lighting and smart control for all lighting solutions in their dream house: depending on the light intensity in the room, some indirect luminaires illuminate the surroundings/room in the evening and immerse the house in the desired ambience. This means that hardly any light has to be actively switched on, which saves energy.



ECOLOGICAL BUILDING AND LIGHTING

Thanks to well thought-out insulation, a flat roof with a photovoltaic system and selected materials such as concrete, wood, glass and natural stone, the passive house of the two influencers Susanna and Marc meets the KfW40+ standard and is a plus-energy building. With the PV system, they produce significantly more energy than they consume. The house also has an energy storage system and a wallbox to use the electricity even more effectively.

This approach also fits in with our sustainability strategy: after all, we also try to focus on the use of secondary raw materials in the production of lighting solutions and consistently reduce packaging waste and transport emissions.


STRONG PROJECT. STRONG PARTNER.

Building owners: Susanna and Marc Mevißen

Location: Waldfeucht, North-Rhine Westphalia
Email: mevissen.haus@gmail.com

Lighting design: The building owners in cooperation with the SLV sales team

The lighting for the villa in Waldfeucht is not the only cooperation that our specialists have actively supported. Our partners can be found throughout Europe, with projects of all sizes. Want to know more? Scan me!



SLV LIGHTING KNOWLEDGE

LUMEN

The luminous flux (indicated in Lumen) describes how much light is emitted in all directions by a light source. It represents the overall brightness perceived by the human eye. The efficiency of a luminaire is often given in Lumen per Watt. The higher the luminous flux (in Lumen) per power consumed (in Watt), the more efficient the light source.

CRI

The colour rendering index is the impact of a light source on the colour of an object as perceived by the human eye compared to a natural source of light (e.g. sunlight). According to EN 12464-1, indoor spaces in which people spend or work for longer amounts of time should have a colour rendering index (CRI) of >80.

COLOUR TEMPERATURE

The colour temperature of a light source is indicated in Kelvin (K). The higher the colour temperature, the cooler and more stimulating the light (e.g. daylight = 5500K). The lower the Kelvin figure, the warmer and cosier the light. The colour temperature of a 2700K light bulb is now recommended as the perfect home lighting. The CCT switch allows the colour temperature of a luminaire to be adjusted.

DIM-TO-WARM (DTW)

The dim-to-warm feature lets you adjust the colour temperature and brightness of the light. When dimmed, the light changes from a bright, cool-white colour to a warm colour.

TUNEABLE WHITE (TW)

The Tuneable White function allows you to set the colour temperature of LED lights as desired. The light can be adjusted to suit different times of day and moods.

RGB RGB+W

An RGB-compatible luminaire covers the entire colour spectrum from red, green and blue with the white balance in the background. The white balance of the RGB+W is also optimised and represented in high quality.

PROTECTION CLASS

Protection classes indicate which safety measures a device has installed to prevent electric shocks. There are three protection classes which are represented by the symbols below.



IK

The IK protection class is a classification of building materials and surfaces that determines how resistant they are to mechanical impact such as blows, collisions or pressure.

IP

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture.

HALF BEAM ANGLE

The half beam angle describes the light emission taking the composition of the luminaire, lamp and distance from an object into account. The smaller the half beam angle, the narrower the beam of light.

UGR

UGR (Unified Glare Rating) rates the glare of a luminaire to relieve the eye. The lower the UGR value, the more pleasant the light is to the eye. A UGR<19 is therefore recommended for workplaces.

SMART LIGHTING

Smart Lighting describes automated light management. With DALI, ZIGBEE, Casambi and BLUETOOTH, smart luminaires can be controlled via apps and other controls.


LALU®
1007519 + 1007522



LALU®
1007520 + 1007532



INDOOR RECESSED CEILING LIGHTS

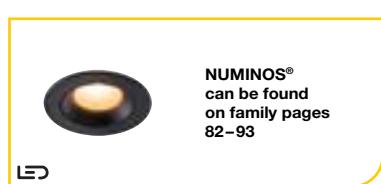




LED OCCULDAS 14 230	LED OCCULDAS 23 230	LED CONTONE® 231	LED CONTONE® 231	LED H-LIGHT 232	LED KARPO 30 232
SOCKET PLASTRA 233	SOCKET PLASTRA 233	LED DEKLED 234	SOCKET VARU 234	SOCKET DOLIX OUT 235	SOCKET DOLIX OUT 235
LED KAMUELA ECO 236	LED KAMUELA ECO 237	LED KINI 237	LED AKALO D83 237	LED FRAME BASIC SET 238	LED FRAME BASIC 238
LED FRAME BASIC 238	LED FRAME CURVE 239	LED FRAME CURVE 239	LED QUAD FRAME 9 240	LED NOTAPO S 241	LED NOTAPO L 241
LED DOWNUNDER PUR 80 242	LED DOWNUNDER PUR 150 242	LED MOBALA 243	LED WORO 243	LED LED PANEL 243	LED PATTA-I 244
LED PATTA-I 244	LED PATTA-I 245	LED PATTA-I 245	LED PATTA-F 246	LED PATTA-F 247	

OUTDOOR RECESSED WALL LIGHTS



OUTDOOR RECESSED FLOOR LIGHTS

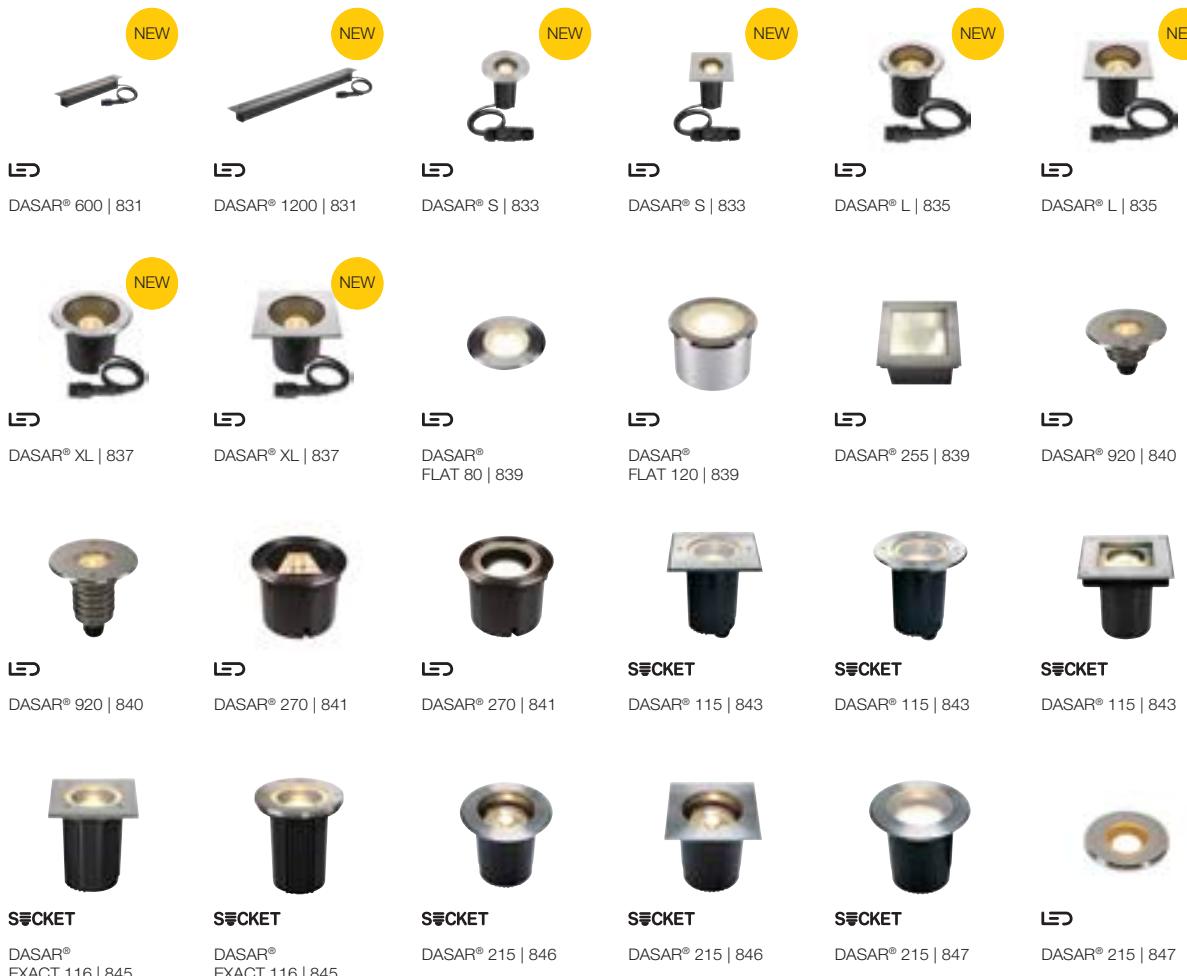



LED
TRAIL-LITE® 60 | 848



LED
POWER
TRAIL-LITE® | 849



LED
POWER
TRAIL-LITE® | 849



LED
GIMBLE OUT | 849



LED
SMALL PLOT | 851



LED
SMALL PLOT | 851



SMALL PLOT | 851



SMALL PLOT | 851



LED
BIG PLOT | 853



LED
BIG PLOT | 853



BIG PLOT | 853



BIG PLOT | 853



LED
ROCCI | 854



LED
ROCCI | 854



LED
ROCCI 200 | 855




LED
ROCCI 200 | 855



SOCKET
SOLASTO | 857



SOCKET
SOLASTO | 857

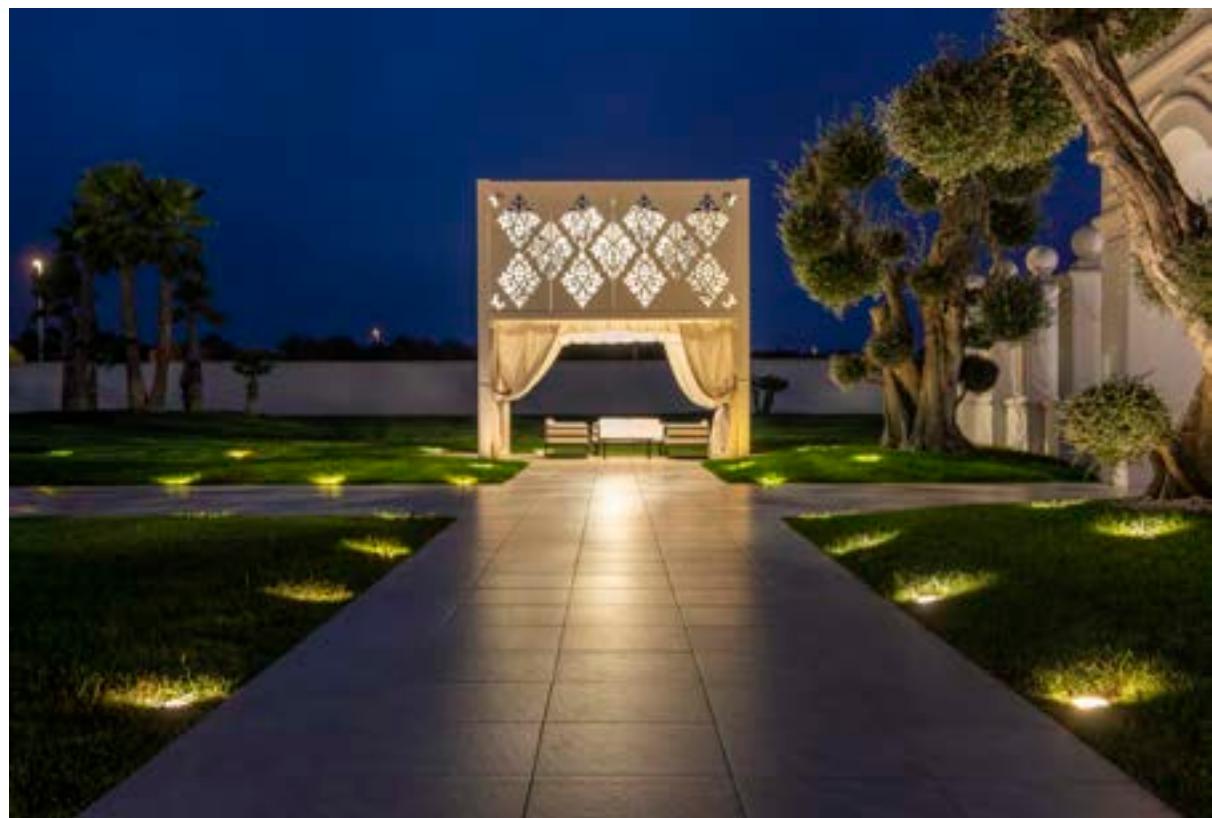

INDOOR CEILING LIGHTS

	NUMINOS® can be found on family pages 102–105		MEDO® can be found on family pages 164–165		VARYT 251
	LED Q-LINE® 253		SOCKET TRILEDO 255		SOCKET TRILEDO 255
	SOCKET TRILEDO 255		LED TRILEDO 257		LED TRILEDO 257
	LED TRILEDO 257		LED OCULUS 258		SOCKET ENOLA B 259
	LED ENOLA C 259		SOCKET ASTINA 261		SOCKET NAGY 75 261
	LED ANELA 261		LED OCCULDAS 13 262		SOCKET OCCULDAS 23 262
	SOCKET ALTRA DICE 263		SOCKET ALTRA DICE 263		SOCKET KARDAMOD 265
	SOCKET KARDAMOD 265		SOCKET FENDA 266		SOCKET FENDA 267
	SOCKET FENDA 267		SOCKET FENDA 267		SOCKET TENORA 268
	SOCKET SOPRANA 269		SOCKET PLASTRA 270		LED PLASTRA 271
	SOCKET PLASTRA 105 271		SOCKET PLASTRA 104 271		LED FERA 25 272
	LED FERA 25 272		LED MARONA 273		LED PANEL 60 274
	LED PANEL 275		LED PANEL 60 275		LED PANEL 275



OUTDOOR | CEILING LIGHTS

SOCKET PHOTONI 789	LED S-CUBE 791	LED ESKINA FRAME 791	LED ENOLA OCULUS 792	LED ENOLA ROUND S 793	LED ENOLA ROUND M 793
LED ENOLA ROUND L 793	LED ENOLA SQUARE S 795	LED ENOLA SQUARE M 795	LED ENOLA SQUARE L 795	LED BIG THEO 797	SOCKET BIG THEO 797
LED OVALISK 797	SOCKET PHOTONIA 799	SOCKET MOLAT 799	SOCKET SITRA 801	SOCKET ROX 801	SOCKET ROX 801



INDOOR PENDANT LIGHTS





FENDA 297	LED HELIA AMBIENT 35 300	LED HELIA AMBIENT 35 300	LED HELIA 30 301	LED HELIA 30 301	LED HELIA 40 303
LED HELIA 40 303	LED ASTINA 305	LED ENOLA B 305	LED ENOLA 305	LED ANELA 306	LED LISENNE 306
LED TONGA® 307	LED QUADRASS 307	LED PARA CONE GL 309	LED PARA CONE 20 309	LED PARA CONE 30 309	LED PHELIA 10 310
LED PHELIA 20 311	LED PHELIA 25 311	LED PHELIA 30 311	LED FORCHINI 50 312	LED FORCHINI 70 312	LED FORCHINI M 40 313
LED FORCHINI M 50 313	LED LIGHT EYE® 90 314	LED LIGHT EYE® 150 314	LED SUN / BIG SUN 315	LED ROTOBALL 25 317	LED ROTOBALL 40 317
LED ROTOBALL 50 317	LED PARA DOME 318	LED PARA DOME 318	LED PARA DOME 318	LED PARA 380 319	

INDOOR WALL LIGHTS

 LED LYGANT 325	 LED LYGANT 325	 SOCKET VARYT 327	 LED SEDO 7 329	 LED SEDO 14 329	 LED SEDO 21 329
 LED TRUKKO 330	 LED TRUKKO 330	 LED TRUKKO 331	 LED TRUKKO 80 331	 LED TRUKKO 60 332	 LED TRUKKO 90 332
 LED MARYLIN 40 333	 LED WL 149 334	 SOCKET WL 149 334	 SOCKET WL 106 335	 SOCKET WL 106 335	 SOCKET MIBO UP/DOWN 337
 LED MAGANDA 337	 LED DORISA 30 339	 LED DORISA 50 339	 LED GLENOS® 60 339	 LED L-LINE 60 341	 LED L-LINE 120 341
 LED Q-LINE® 341	 SOCKET PANTILO ROPE 345	 SOCKET ASTO TUBE 347	 SOCKET ASTO TUBE 347	 LED MANA BASE 349	 LED MANA BASE 349
 MANA 40 319	 MANA 60 349	 LED MANA 351	 MANA 351	 MANA 351	 LED MANA 353
 LED MANA 353	 MANA 353	 MANA 353	 LED OCULUS 355	 LED OCULUS UP/DOWN 355	 SOCKET PLASTRA 356



SOCKET PLASTRA 356	SOCKET PLASTRA 357	SOCKET PLASTRA 357	SOCKET PLASTRA 359	LED PLASTRA 359	LED PLASTRA 359
SOCKET PLASTRA 360	SOCKET PLASTRA 101 361	SOCKET PLASTRA 361	SOCKET PLASTRA 104 361	LED LOGS IN 362	LED LOGS IN 362
LED LOGS IN L 363	LED LOGS IN L 363	LED QUAD FRAME 14 364	LED QUAD FRAME 19 364	LED SHELL 15 365	LED SHELL 30 365
LED ASSO 300 366	LED ASSO 300 367	SOCKET OSSA 180 367	SOCKET OSSA 300 367	LED CARISO 368	LED CARISO 368
LED CHROMBO 369	LED DIRETO 60 370	LED DIRETO 90 370	LED ARLINA 60 371	LED ARLINA 130 371	SOCKET ANDREAS 373
SOCKET DENA 30 373	SOCKET BASKET 373	SOCKET QUADRASS 375	LED QUADRASS SPOT 375	SOCKET LISENNE 375	SOCKET FITU 376
SOCKET FITU CUBE 376	SOCKET THEO UP/DOWN 377	SOCKET SOLID CUBE 377	LED ENOLA B 379	LED ENOLA B 379	SOCKET ASTINA UP/DOWN 379

INDOOR WALL LIGHTS



SOCKET

FENDA | 380



FENDA | 380



KENKUA SPOT | 381



COUPA FLEX | 381



KARPO MAGN | 382



KARPO GOOSE | 382



LED

KARPO 30 | 383



LED

KARPO | 383



SOMNILA SPOT | 384



SOMNILA SPOT | 385



SOMNILA FLEX | 385



SOMNILA FLEX | 385



SOCKET

DIO FLEX PLATE | 387



LED

DIO FLEX PLATE | 387



LED

DIO FLEX PLATE | 387



SOCKET

PHELIA | 388



MERADO FLOOD | 388



DISPLAY ADL 50 | 389



OUTDOOR WALL LIGHTS

 NEW SOCKET PHOTONI 709	 NEW LED LID II 711	 NEW LED LID II 711	 NEW LED LID I 713	 NEW LED LID I 713	 NEW LED I-RING 714
 NEW LED OVAL 14 715	 NEW LED OVAL 18 715	 NEW LED CONCRETO M 717	 NEW LED CONCRETO L 717	 NEW LED VANO WING 719	 NEW LED VANO WING 719
 NEW LED MANA BASE 720	 NEW LED RUSTY® MANA 720	 NEW LED RUSTY® MANA 720	 NEW LED MANA OUT 721	 NEW LED MANA OUT 721	 NEW LED ENOLA OCULUS 723
 NEW LED ENOLA OCULUS 723	 NEW LED ENOLA OCULUS S 725	 NEW LED ENOLA OCULUS M 725	 NEW LED ENOLA ROUND L UP/DOWN 725	 NEW LED ENOLA ROUND S UP/DOWN 727	 NEW LED ENOLA ROUND M UP/DOWN 727
 NEW LED ENOLA ROUND L UP/DOWN 727	 NEW LED ENOLA SQUARE S 729	 NEW LED ENOLA SQUARE M 729	 NEW LED ENOLA SQUARE L UP/DOWN 729	 NEW LED ENOLA SQUARE S UP/DOWN 730	 NEW LED ENOLA SQUARE M UP/DOWN 730
 NEW LED ENOLA SQUARE L UP/DOWN 730	 NEW SOCKET THEO UP/DOWN 735	 NEW LED BIG THEO BEAM UP/ FLOOD DOWN 735	 NEW SOCKET BIG THEO UP/DOWN 735	 NEW LED BIG THEO FLOOD UP/DOWN 736	 NEW SOCKET THEO 736
 NEW SOCKET BIG THEO 737	 NEW LED BIG THEO 737	 NEW LED SITRA S 739	 NEW LED SITRA S 739	 NEW LED SITRA M 741	 NEW LED SITRA L 741

OUTDOOR WALL LIGHTS

					
SOCKET SITRA CUBE 741	SOCKET GRAFIT 742	SOCKET GRAFIT 742	SOCKET GRAFIT 743	SOCKET GRAFIT 743	LED QUADRULO 744
					
SOCKET QUADRULO SENSOR 745	SOCKET QUADRULO 745	SOCKET MERIDIAN 746	SOCKET MERIDIAN BOX 746	SOCKET MERIDIAN BOX SENSOR 747	SOCKET MERIDIAN BOX 747
					
LED ESKINA FRAME 749	LED ESKINA FRAME 749	LED ESKINA FRAME 749	LED BOOKAT 751	LED BIG QUAD 752	LED QUAD 752
					
LED QUAD UP/DOWN 15 753	LED BIG QUAD UP/DOWN 755	LED BIG QUAD 755	LED RUSTY® UP/DOWN 756	LED RUSTY® UP/DOWN 756	LED OVALISK SENSOR 757
					
LED OVALISK 757	LED PEMA® 758	LED PEMA® 759	LED PEMA® 759	SOCKET PEMA® 759	LED FLATT SENSOR 760
					
LED FLATT 760	SOCKET ASTINA 761	SOCKET ASTINA STEEL 761	LED ANGOLUX SENSOR 762	LED ANGOLUX 762	LED VILUA S 763
					
LED VILUA L 763	LED VILUA 763	SOCKET MYRA UP/DOWN 764	LED SITRA UP/DOWN 765	SOCKET SITRA UP/DOWN 765	SOCKET ROX 767

NEW



SOCKET ROX UP/DOWN 767	LED DELWA 767	LED SLOTS 768	SOCKET WALLYX 768	LED DOWNUNDER OUT 769	LED DOWNUNDER OUT 769
LED ABRIDOR SENSOR 770	LED ABRIDOR 770	LED ORDI SENSOR 771	LED ORDI 771	SOCKET BOX-L 773	LED BOX-L 773
SOCKET BOX UP/DOWN 773	LED LOGS 775	LED OUT-BEAM UP / FLOOD DOWN 775	LED L-LINE OUT 775	SOCKET PHOTONIA 777	SOCKET MOLAT 777
SOCKET GLOO PURE 777	SOCKET F-POL 778	SOCKET SQUARE 779	SOCKET KERAS ELT 779	SOCKET SITRA 779	LED RASCALI 780
LED IPERI 780	SOCKET QUADRASYL 781	SOCKET SQUARE TURN 781	LED TODAY PRO 783	LED ESKINA D 783	SOCKET MYRA DISPLAY 783
LED LED SPOT 785	SOCKET NAUTILUS 785	SOCKET MYRA 785			

INDOOR WALL AND CEILING LIGHTS



SOCKET PANTILO ROPE 19 393	SOCKET PANTILO ROPE 27 393	LED CYFT 395	SOCKET ASTO TUBE 395	SOCKET ASTO TUBE 397	SOCKET ASTO TUBE 397

SOCKET ASTO TUBE 399	SOCKET ASTO TUBE 397	LED OCULUS 399	LED KARPO 30 399	LED NOBLO® 401	LED NOBLO® 401

LED NOBLO® 401	LED KALU 403	LED KALU 403	LED KALU 403	LED KALU 403	SOCKET KALU 405


SOCKET KALU 405	SOCKET KALU 405	SOCKET KALU 405	SOCKET ENOLA B 407	SOCKET ENOLA B 407	SOCKET ENOLA B 407

SOCKET ALTRA DICE 408	SOCKET SPOT 79 409	SOCKET INDA 409	SOCKET PURI 411	SOCKET PURI 411	SOCKET PURI 411

SOCKET PURI 411	SOCKET AVO 413	SOCKET AVO 413	SOCKET AVO 413	SOCKET AVO 413	SOCKET AVO 415



OUTDOOR WALL AND CEILING LIGHTS

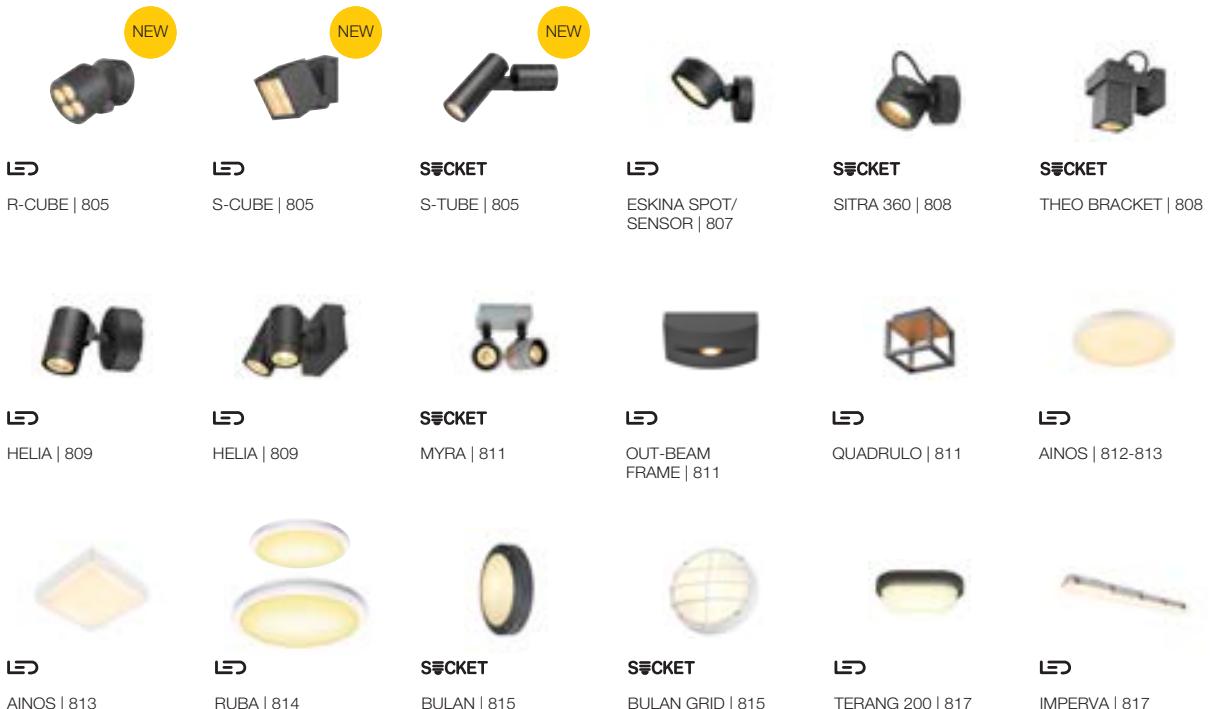




VINOLINA TWO
1007696



INDOOR TABLE AND FLOOR LAMPS

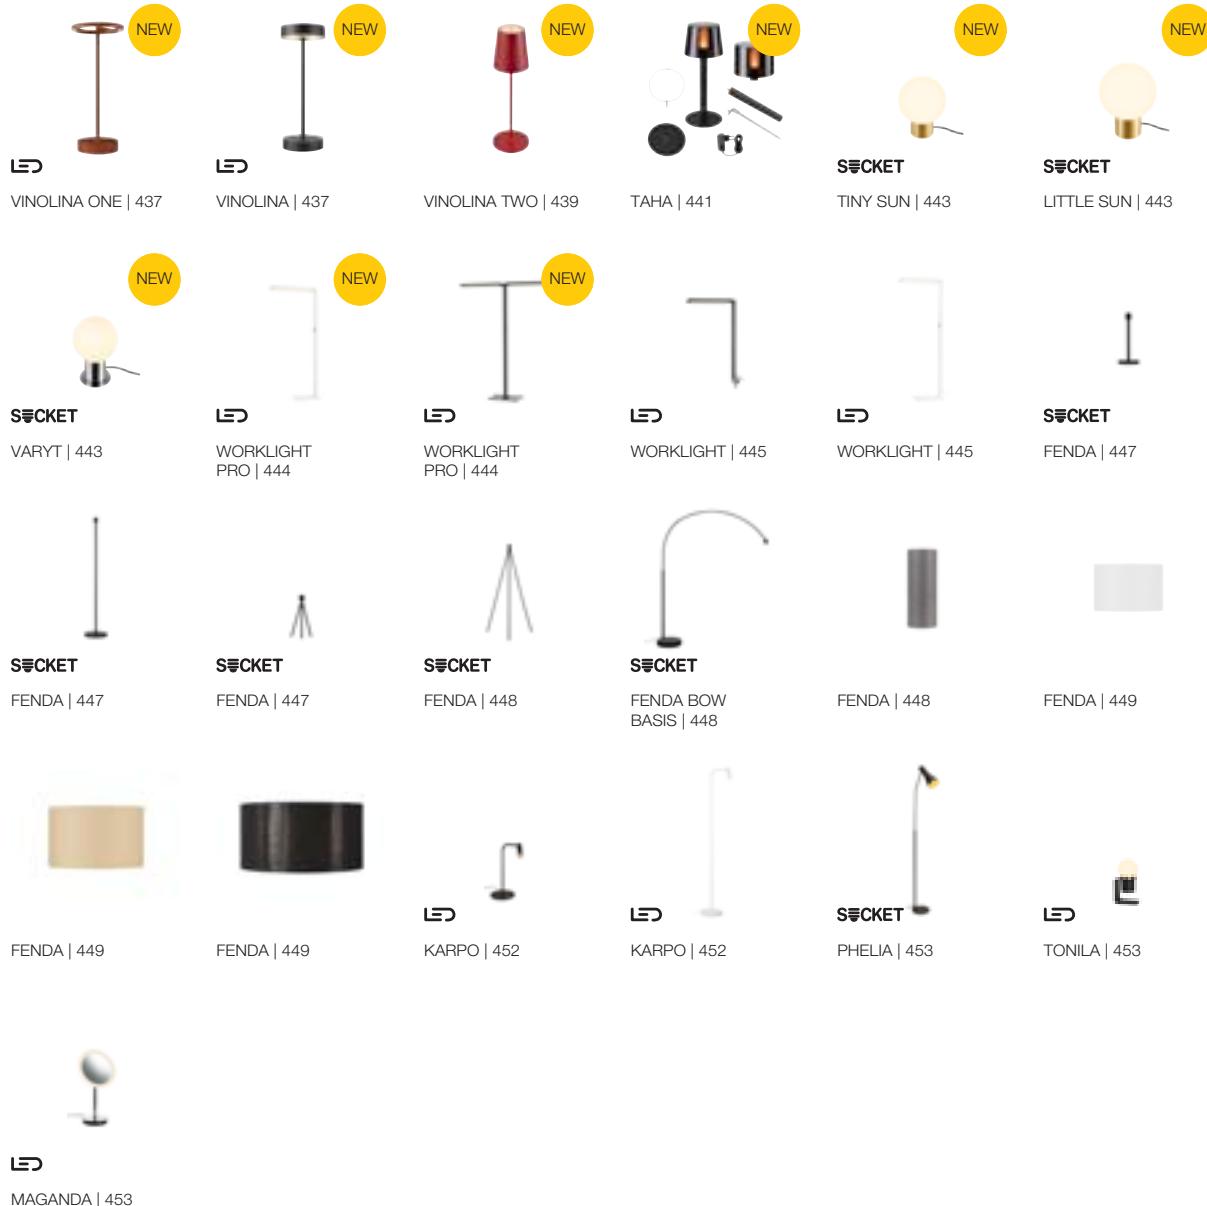

MOBILE LIGHTS AND OUTDOOR FLOOR LAMPS





SOCKET ARROCK SLOT 649	LED L-LINE OUT 30 650	LED L-LINE OUT 60 651	LED L-LINE OUT 50/80 651	SOCKET THEO PATHLIGHT 652	LED OVALISK 75/100 653
SOCKET GLOO PURE 27/44/70 655	SOCKET ROTOBALL 25/40/50 657	SOCKET PHOTONIA 659	SOCKET PHOTONIA 659	SOCKET OTOS GLAS 659	SOCKET CUBIX 660
SOCKET CONE 660	SOCKET MOLAT 661	SOCKET MOLAT 661	SOCKET LISENNE 40/70 662	SOCKET ADEGAN MANILA 663	SOCKET ADEGAN 663
SOCKET ALPA MUSHROOM 45/75 665	SOCKET ALPA CONE 100 665	LED APONI 90/120 666	LED TRUST 30/60 667	SOCKET BIG NAILS 50/80 668	SOCKET ROX ACRYL 30/60/90 669
SOCKET VAP SLIM 30/60/90 671	SOCKET C-POL 672	SOCKET F-POL 672	SOCKET SQUARE POLE 30/60/90 673	LED SLOTS 45/65 675	LED H-POL 30/60 676
LED H-POL TWIN 30/60 677	LED SLOTBOX 40/70 678	LED FLATT 65/100 679	LED ABRIDOR 60/100 681	LED IPERI 50 681	SOCKET QUADRASYL 75 682
LED QUAD POLE 683	LED BOOKAT 683	LED RASCALI 45/65 684	SOCKET MYRA SPOT 685	SOCKET SITRA 360 685	



SYNA GARDEN

1007147



OUTDOOR SPOTLIGHTS

**LED**

SYNA PLANT | 689

**LED**

SYNA GARDEN | 689

**LED**

SYNA | 689

**LED**

FLOODI S | 691

**LED**

FLOODI M | 691

**LED**

FLOODI L | 691

**LED**

GALEN 60 | 692

**LED**

GALEN 120 | 692

**LED**

FLAC BEAM® | 693

**SOCKET**

SAMRINA | 693

**SOCKET**

NAUTILUS 10 | 694

**SOCKET**

BIG NAUTILUS | 694

**SOCKET**

NAUTILUS 10 | 695

**LED**

NAUTILUS 10 | 696

**SOCKET**

NAUTILUS | 697

**SOCKET**

NAUTILUS 10 SPOT LED | 697

**LED**

DASAR® PROJECTOR | 698

**LED**

DASAR® 920 | 698

**LED**

HELIA SPOT S | 699

**LED**

HELIA SPOT L | 699

**SOCKET**

THEO BRACKET | 701

**LED**

LED SPIKE | 701

**SOCKET**

SITRA 360 SPIKE | 703

**SOCKET**

SITRA 360 SPIKE | 703

IN-LINE 44
1006621

NUMINOS® XS
1006654

NUMINOS® XS
1006762






INDOOR 48V SYSTEMS



INDOOR LOW-VOLTAGE SYSTEMS

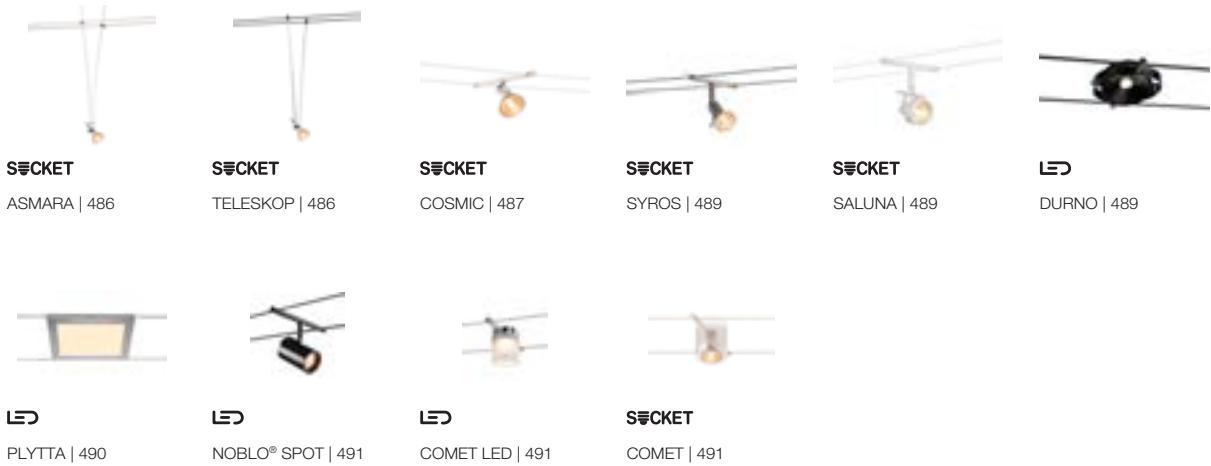

NOBLO® SPOT
1007352





INDOOR 1-PHASE SYSTEMS

					
LED NOBLO® SPOT 501	LED NOBLO® SPOT 501	LED NOBLO® SPOT 503	LED NOBLO® SPOT 503	SOCKET ASTO TUBE 505	SOCKET PANTILO ROPE 19 505
					
LED HELIA 50 TRACK 507	LED PANEL TRACK 507	LED PANEL TRACK 507	SOCKET PARA CONE GL 508	SOCKET PARA CONE GL 508	SOCKET PARA CONE 14 509
					
SOCKET PARA CONE 14 509	SOCKET TONGA® 511	SOCKET LIGHT EYE® 90 511	SOCKET LIGHT EYE® 150 511	SOCKET FORCHINI M 40 TRACK 512	SOCKET PURI TRACK 513
					
SOCKET PURI TRACK 513	SOCKET PURI TRACK 515	SOCKET AVÓ TRACK 515	LED ENOLA C TRACK 516	LED ENOLA C TRACK 517	SOCKET ENOLA B TRACK 517
					
SOCKET ENOLA B 517	SOCKET BIMA 519	SOCKET BIMA 519	LED KALU TRACK 520	SOCKET KALU TRACK 520	SOCKET EURO SPOT TRACK 521
					
SOCKET ALTRA DICE TRACK 521					

TS V
1007655






INDOOR 3-PHASE SYSTEMS



TS V 543	TS V 543	NOBLO® SPOT 545	NOBLO® SPOT 545	NOBLO® SPOT 547	NOBLO® SPOT 547
SOCKET PANTILO ROPE 19 549	LED SIGHT TRACK 550	LED SIGHT TRACK 550	LED SIGHT MOVE 551	LED SIGHT MOVE 551	SOCKET PARA CONE GL 552
SOCKET PARA CONE GL 552	SOCKET PARA CONE 14 553	SOCKET PARA CONE 14 553	SOCKET FORCHINI M 40 TRACK 554	LED EURO CUBE 555	SOCKET EURO SPOT TRACK 555
SOCKET EURO SPOT TRACK 555	SOCKET ALTRA DICE TRACK 556	SOCKET PURI TRACK 557	SOCKET PURI TRACK GLASS 557	LED KALU TRACK LED 558	SOCKET KALU TRACK 558
SOCKET BIMA 559	SOCKET BIMA 559	LED HELIA 50 TRACK 561	LED ENOLA C TRACK 561	SOCKET AVO TRACK 561	

GRAZIA PRO
FLEXSTRIP
1007352

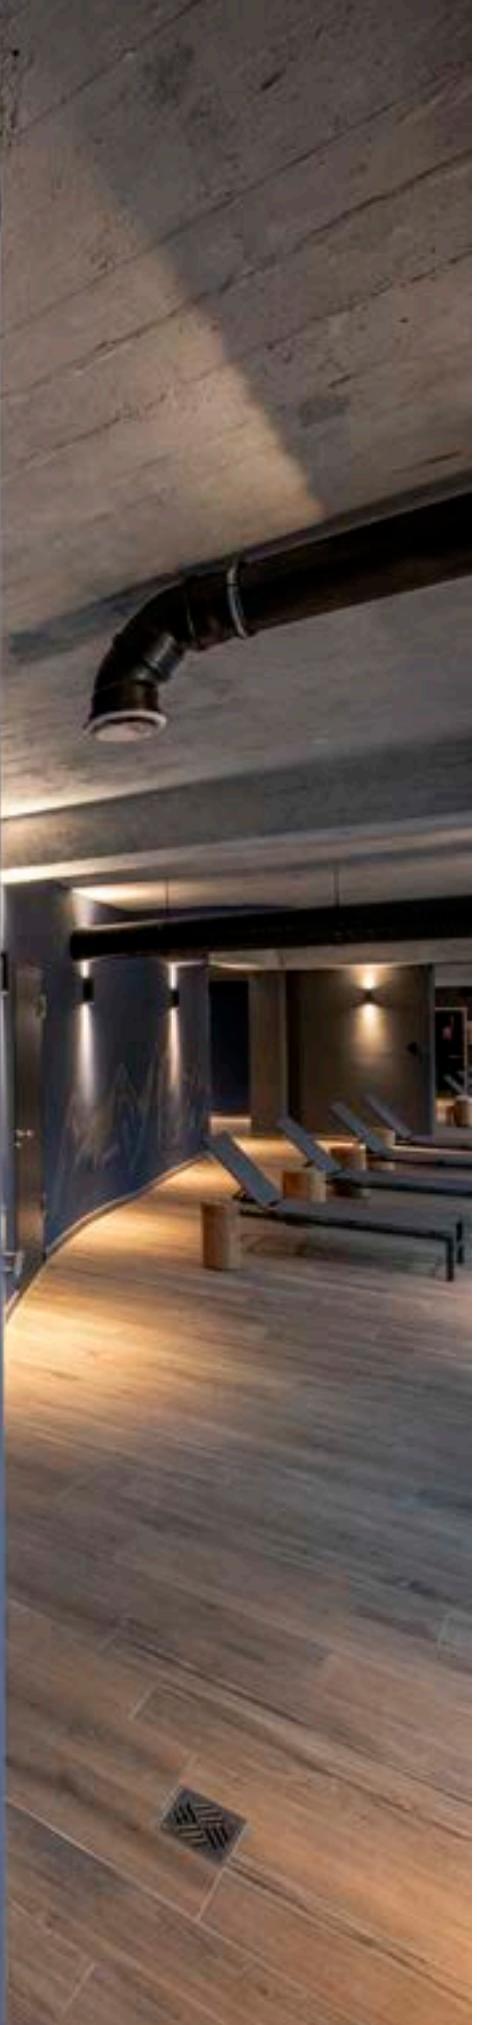

PROFILES



GRAZIA 10
SURFACE-MOUNTED
PROFILE | 567

GRAZIA 10
RECESSED PROFILE
| 567

GRAZIA 10 EDGE | 570

GRAZIA 20
SURFACE-MOUNTED
PROFILE | 573

GRAZIA 20
RECESSED PROFILE
| 573

GRAZIA 60
SURFACE-MOUNTED
PROFILE | 577



GRAZIA 60
RECESSED PROFILE
| 577

GRAZIA 10
ACCESSORIES | 569

GRAZIA 10 EDGE
ACCESSORIES | 571

GRAZIA 20
ACCESSORIES |
574–575

GRAZIA 60
ACCESSORIES |
578–579

LED STRIPS



GRAZIA
FLEXSTRIP LED | 582

GRAZIA PRO
FLEXSTRIP LED | 583

GRAZIA PRO MAX
FLEXSTRIP | 585

GRAZIA PRO
FLEXSTRIP
TUNABLE WHITE | 587

GRAZIA PRO
FLEXSTRIP
RGBW | 589

GRAZIA IP
FLEXSTRIP | 591



GRAZIA
FLEXSTRIP LED
ACCESSORIES | 582

GRAZIA PRO
FLEXSTRIP LED
ACCESSORIES | 583

GRAZIA PRO MAX
FLEXSTRIP
ACCESSORIES | 585

GRAZIA PRO
FLEXSTRIP
TUNABLE WHITE
ACCESSORIES | 587

GRAZIA PRO FLEX-
STRIP RGBW ACCE-
SORIES | 589

A photograph of a terrace at dusk or night. In the foreground, a large, round, woven basket with a textured, ribbed pattern sits on a blue surface. To its right stands a tall, slender floor lamp with a black, conical shade that is illuminated from within, casting a warm glow. A vertical wooden post is positioned behind the basket. In the background, a white building with a flat roof is visible, surrounded by dark trees and hills under a deep blue sky.

TAHA
1007380

MEDO® PRO 90
1007309



ABRIDOR



ADEGAN



AINOS



ALPA





ALTRA DICE

**SOCKET**

ALTRA DICE | 263

**SOCKET**

ALTRA DICE | 263

**SOCKET**

ALTRA DICE | 408

**SOCKET**ALTRA DICE
TRACK | 521**SOCKET**ALTRA DICE
TRACK | 556

ANELA

**LED**

ANELA | 261

**LED**

ANELA | 306

ARROCK

**SOCKET**ARROCK
GRANITE 40/70 | 647**SOCKET**

ARROCK ARC | 648

**LED**ARROCK
STONE 50/75 | 649**SOCKET**

ARROCK SLOT | 649

ASTINA

**SOCKET**

ASTINA | 261

**SOCKET**

ASTINA | 305

ASTINA
UP/DOWN | 379**SOCKET**

ASTINA | 761

**SOCKET**

ASTINA STEEL | 761

ASTO



SOCKET
ASTO TUBE | 285



SOCKET
ASTO TUBE | 285



SOCKET
ASTO TUBE | 285



SOCKET
ASTO TUBE | 347



SOCKET
ASTO TUBE | 347



SOCKET
ASTO TUBE | 395



SOCKET
ASTO TUBE | 397



SOCKET
ASTO TUBE | 397



SOCKET
ASTO TUBE | 399



SOCKET
ASTO TUBE | 397



SOCKET
ASTO | 415



SOCKET
ASTO | 415



SOCKET
ASTO | 415



SOCKET
ASTO TUBE | 505

AVO



SOCKET
AVO | 413



SOCKET
AVO | 413



SOCKET
AVO | 413



SOCKET
AVO | 413



SOCKET
AVO | 415



SOCKET
AVO TRACK | 515/561

BIMA



SOCKET
BIMA | 519



SOCKET
BIMA | 519



SOCKET
BIMA | 559



SOCKET
BIMA | 559



BOOKAT



LED

BOOKAT | 751

LED

BOOKAT | 683

BOX

S~~E~~CCKET

BOX-L | 773



LED

BOX-L | 773

S~~E~~CCKET

BOX UP/DOWN | 773

BRICK



LED

BRICK MESH | 825



LED

BRICK | 825



LED

BRICK | 825

S~~E~~CCKETBRICK
DOWNUNDER | 827

LED

BRICK
DOWNUNDER | 827

BULAN

S~~E~~CCKET

BULAN | 815

S~~E~~CCKET

BULAN GRID | 815

CARISO



LED

CARISO | 368



LED

CARISO | 368

CONCRETO



SOCKET

CONCRETO | 627



SOCKET

CONCRETO | 627



LED

CONCRETO M | 717



LED

CONCRETO L | 717



SOCKET

CONCRETO | 821



LED

CONCRETO | 821

CONTONE®



LED

CONTONE® | 231



LED

CONTONE® | 231

CUBE



LED

S-CUBE 35/75 | 607



LED

R-CUBE 35/70 | 609



LED

S-CUBE | 791



LED

R-CUBE | 805



LED

S-CUBE | 805



DASAR®



DIO FLEX



**SOCKET**

DOLIX OUT | 235

**SOCKET**

DOLIX OUT | 235

DOWNUNDER OUT

**LED**DOWNUNDER
OUT | 769**LED**DOWNUNDER
OUT | 769**LED**DOWNUNDER
OUT S | 823**LED**DOWNUNDER
OUT M | 823**LED**DOWNUNDER
OUT L | 823

ENOLA

**SOCKET**

ENOLA B | 259

**LED**

ENOLA C | 259

**SOCKET**

ENOLA B | 305

**SOCKET**

ENOLA | 305



ENOLA B | 379



ENOLA B | 379

**SOCKET**

ENOLA B | 407

**SOCKET**

ENOLA B | 407

**SOCKET**

ENOLA B | 407

**LED**

ENOLA C TRACK | 516

**LED**

ENOLA C TRACK | 517

**SOCKET**

ENOLA B TRACK | 517

**SOCKET**

ENOLA B | 517

**LED**

ENOLA C TRACK | 561

**LED**ENOLA
OCULUS | 723**LED**ENOLA
OCULUS | 723**LED**ENOLA
OCULUS S | 725**LED**ENOLA
OCULUS M | 725



ESKINA



EURO SPOT



SOCKET

EURO SPOT
TRACK | 521



SOCKET

EURO SPOT
TRACK | 555



SOCKET

EURO SPOT
TRACK | 555

FENDA



SOCKET

FENDA | 266



SOCKET

FENDA | 296



SOCKET

FENDA | 447



SOCKET

FENDA | 447



SOCKET

FENDA | 447



SOCKET

FENDA | 448



SOCKET

FENDA BOW
BASIS | 448



SOCKET

FENDA | 380



FENDA | 380



FENDA | 296



FENDA | 296, 448



FENDA | 267, 297, 449



FENDA | 267, 297, 449



FENDA | 267, 297, 449

FITU



SOCKET

FITU | 295



SOCKET

FITU | 376



SOCKET

FITU CUBE | 376



FLATT



FORCHINI



F-POL



GLENOS®



GLOO PURE



GRAFIT



HELIA





HORN

**LED**

HORN MINI | 218

**SOCKET**

HORN | 219

**SOCKET**

HORN | 219

**SOCKET**

HORN | 219

**SOCKET**

HORN | 220

**SOCKET**

HORN | 220

**SOCKET**

HORN | 220

**SOCKET**

HORN-T | 221

**LED**

HORN MAGNA | 221

H-POL

**LED**

H-POL 30/60 | 676

**LED**H-POL TWIN
30/60 | 677

IPERI

**LED**

IPERI 50 | 681

**LED**

IPERI | 780

I-RING



LED

I-RING | 613

LED

I-RING | 714

KADUX



KALU





KARDAMOD

**SOCKET**

KARDAMOD | 265


SOCKET

KARDAMOD | 265

KARPO



LALU®

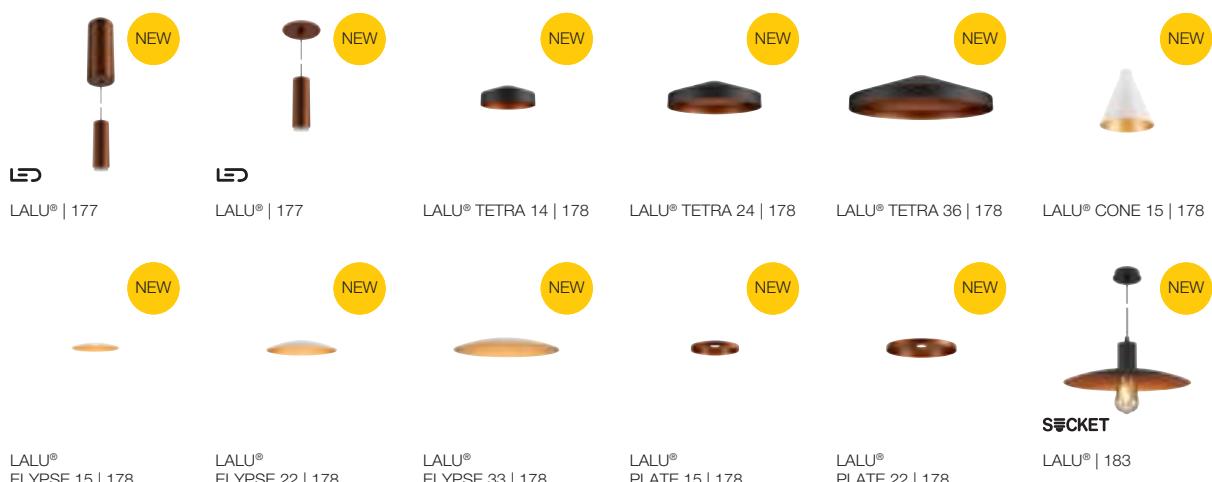LALU®
ELYPSE 15 | 178LALU®
ELYPSE 22 | 178LALU®
ELYPSE 33 | 178LALU®
PLATE 15 | 178LALU®
PLATE 22 | 178

LALU® | 183

LID



LIGHT EYE



LIPSY





LISENNE

**SOCKET**

LISENNE | 306

**SOCKET**

LISENNE | 375

**SOCKET**

LISENNE 40/70 | 662

L-LINE

**LED**

L-LINE 60 | 341

**LED**

L-LINE 120 | 341

**LED**

L-LINE OUT 30 | 650

**LED**

L-LINE OUT 60 | 651

**LED**L-LINE
OUT 50/80 | 651**LED**

L-LINE OUT | 775

LOGS

**LED**

LOGS IN | 362

**LED**

LOGS IN | 362

**LED**

LOGS IN L | 363

**LED**

LOGS IN L | 363

**LED**

LOGS 40/70 | 633

**LED**

LOGS | 775

MAGANDA

**LED**

MAGANDA | 337

**LED**


MAGANDA | 453

MEDO® PRO 40
1006414 (DC)





MANA

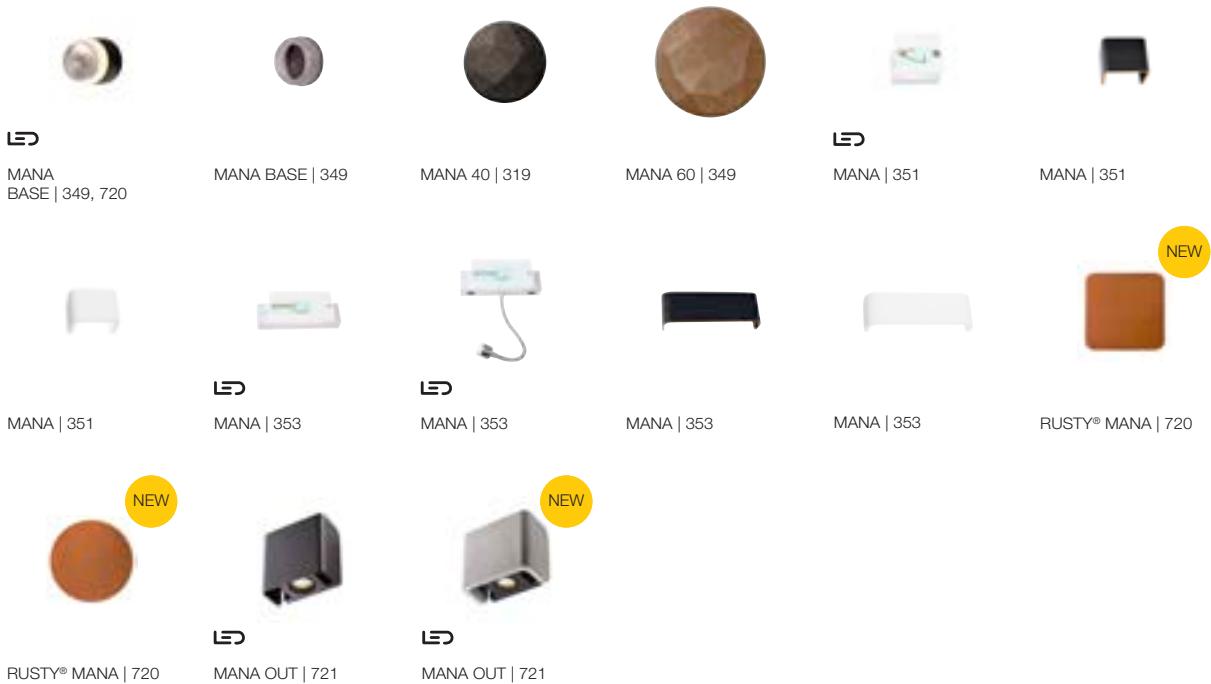

MEDO



MERIDIAN



SOCKET

MERIDIAN | 746



SOCKET

MERIDIAN BOX | 746



SOCKET

MERIDIAN BOX
SENSOR | 747



SOCKET

MERIDIAN BOX | 747

MOLAT



SOCKET

MOLAT | 661



SOCKET

MOLAT | 661



SOCKET

MOLAT | 777



SOCKET

MOLAT | 799

M-POL



LED

M-POL S | 614



LED

M-POL S | 615



LED

M-POL S | 616



LED

M-POL S | 617



LED

M-POL S | 618



LED

M-POL M | 619



LED

M-POL M | 620



LED

M-POL M | 621



M-POL 30/60/90 | 623



MYRA

**SOCKET**

MYRA SPOT | 685

**SOCKET**

MYRA UP/DOWN | 764

**SOCKET**

MYRA | 811

NAUTILUS

**SOCKET**

NAUTILUS 10 | 694

**SOCKET**

BIG NAUTILUS | 694

**SOCKET**

NAUTILUS 10 | 695

**LED**

NAUTILUS 10 | 696

**SOCKET**

NAUTILUS | 697

**SOCKET**

NAUTILUS 10 SPOT | 697

**LED**

NAUTILUS 10 SPOT LED | 697

**SOCKET**

NAUTILUS | 785

NEW TRIA®

**LED**
NEW TRIA®
68 | 134, 135**LED**
NEW TRIA®
68 | 134, 135**LED**
NEW TRIA® UNIVERSAL
68 | 136, 137**LED**
NEW TRIA® UNIVERSAL
68 | 136, 137**LED**
NEW TRIA® 68 | 138**LED**
NEW TRIA® 68 | 138**LED**
NEW TRIA® 75 | 138**LED**
NEW TRIA® 75 | 138**LED**
NEW TRIA® 75 XL | 139**LED**
NEW TRIA® 75 XL | 139

NEW TRIA®



NOBLO®





LED

NUMINOS® GIMBLE
XS | 88

LED

NUMINOS® GIMBLE
S | 88

LED

NUMINOS® GIMBLE
M | 89

LED

NUMINOS® GIMBLE
L | 89

LED

NUMINOS® GIMBLE
XL | 89

LED

NUMINOS®
PROJECTOR XS | 92

LED

NUMINOS®
PROJECTOR S | 92

LED

NUMINOS®
PROJECTOR M | 93

LED

NUMINOS®
PROJECTOR XL | 93

LED

NUMINOS® S | 100

LED

NUMINOS® M | 100

LED

NUMINOS® L | 101

LED

NUMINOS® XL | 101



LED

NUMINOS® S | 104

LED

NUMINOS® M | 104

LED

NUMINOS® L | 105

LED

NUMINOS® XL | 105



LED

NUMINOS® S | 108

LED

NUMINOS® M | 108

LED

NUMINOS® L | 109

LED

NUMINOS® XL | 109



LED

NUMINOS® S | 112

LED

NUMINOS® M | 112

LED

NUMINOS® L | 113

LED

NUMINOS® XL | 113

LED

NUMINOS® ZOOM
M | 115

LED

NUMINOS® 48V
XS | 468

LED

NUMINOS® 48V
S | 468

LED

NUMINOS® 48V
XS | 470

LED

NUMINOS® 48V
S | 470


OCCULDAS



OCULUS



ONE®

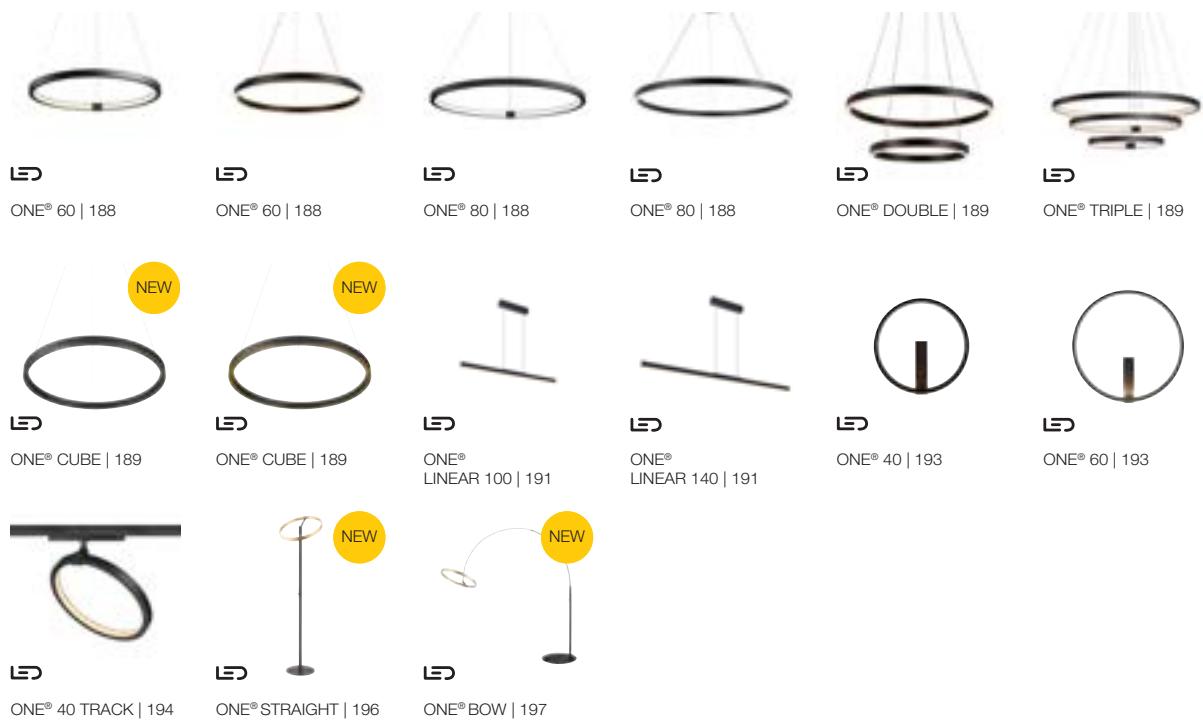



OVALISK



PANEL



PANTILO



PARA



SOCKET

PARA DOME | 318



PARA DOME | 318



PARA DOME | 318



SOCKET

PARA 380 | 319

PARA CONE



SOCKET

PARA CONE GL | 309



SOCKET

PARA CONE 20 | 309



SOCKET

PARA CONE 30 | 309



SOCKET

PARA CONE GL | 508



SOCKET

PARA CONE GL | 508



SOCKET

PARA CONE 14 | 509



SOCKET

PARA CONE 14 | 509



SOCKET

PARA CONE GL | 552



SOCKET

PARA CONE GL | 552



SOCKET

PARA CONE 14 | 553



SOCKET

PARA CONE 14 | 553

PATTA



LED

PATTA-I | 244



LED

PATTA-I | 244



LED

PATTA-I | 245



LED

PATTA-I | 245



LED

PATTA-F | 246



LED

PATTA-F | 247



PEMA

**LED**

PEMA® | 758

**LED**

PEMA® | 759

**LED**

PEMA® | 759

**SOCKET**

PEMA® | 759

PHELIA

**SOCKET**

PHELIA 10 | 310

**SOCKET**

PHELIA 20 | 311

**SOCKET**

PHELIA 25 | 311

**SOCKET**

PHELIA 30 | 311

**SOCKET**

PHELIA | 388

**SOCKET**

PHELIA | 453

PHOTONI

**SOCKET**

PHOTONI 45/75 | 605

**SOCKET**

PHOTONI | 709

**NEW****SOCKET**

PHOTONI | 789

PHOTONIA

**SOCKET**

PHOTONIA | 659

**SOCKET**

PHOTONIA | 659

**SOCKET**

PHOTONIA | 777

**SOCKET**

PHOTONIA | 799

PIKA



SOCKET

PIKA | 228



SOCKET

PIKA | 228

PLASTRA



SOCKET

PLASTRA | 233



SOCKET

PLASTRA | 233



SOCKET

PLASTRA | 270



LED

PLASTRA | 271



SOCKET

PLASTRA 105 | 271



SOCKET

PLASTRA 104 | 271



SOCKET

PLASTRA | 356



SOCKET

PLASTRA | 356



SOCKET

PLASTRA | 357



SOCKET

PLASTRA | 357



SOCKET

PLASTRA | 359



LED

PLASTRA | 359



LED

PLASTRA | 359



SOCKET

PLASTRA | 360



SOCKET

PLASTRA 101 | 361



SOCKET

PLASTRA | 361



SOCKET

PLASTRA 104 | 361

POWER TRAIL-LITE



LED

POWER
TRAIL-LITE® | 849



LED

POWER
TRAIL-LITE® | 849



PURI

**SOCKET**

PURI | 411

**SOCKET**

PURI | 411

**SOCKET**

PURI | 411

**SOCKET**

PURI | 411

**SOCKET**

PURI TRACK | 513

**SOCKET**

PURI TRACK | 513

**SOCKET**

PURI TRACK | 515

**SOCKET**

PURI TRACK | 557

**SOCKET**PURI TRACK
GLASS | 557

Q-LINE®

**LED**

Q-LINE® | 253

**LED**

Q-LINE® | 253

**LED**

Q-LINE® | 293

**LED**

Q-LINE® | 293

**LED**

Q-LINE® | 293

**LED**

Q-LINE® | 341

QUAD

**LED**

QUAD FRAME 9 | 240

**LED**

QUAD FRAME 14 | 364

**LED**

QUAD FRAME 19 | 364

**LED**

BIG QUAD | 752

**LED**

QUAD | 752

**LED**QUAD
UP/DOWN 15 | 753**LED**BIG QUAD
UP/DOWN | 755**LED**

BIG QUAD | 755

QUADRASS



SOCKET

QUADRASS | 307

SOCKET

QUADRASS | 375

LED

QUADRASS
SPOT | 375

QUADRASYL



SOCKET

QUADRASYL 75 | 682

SOCKET

QUADRASYL | 781

QUADRULO



LED

QUADRULO | 639



LED

QUADRULO | 744



SOCKET

QUADRULO
SENSOR | 745



SOCKET

QUADRULO | 745



LED

QUADRULO | 811

RASCALI



LED

RASCALI 45/65 | 684



LED

RASCALI | 780



ROCCI



LED

ROCCI | 854



LED

ROCCI | 854



LED

ROCCI 200 | 855



LED

ROCCI 200 | 855

ROTOBALL



SOCKET

ROTOBALL 25 | 317



SOCKET

ROTOBALL 40 | 317



SOCKET

ROTOBALL 50 | 317



SOCKET

ROTOBALL
25/40/50 | 657

ROX



SOCKET

ROX ACRYL
30/60/90 | 669

SOCKET

ROX UP/DOWN | 767



SOCKET

ROX | 767



SOCKET

ROX | 801



SOCKET

ROX | 801

RUSTY®



SENSOR



SIGHT






SIMA



SITRA

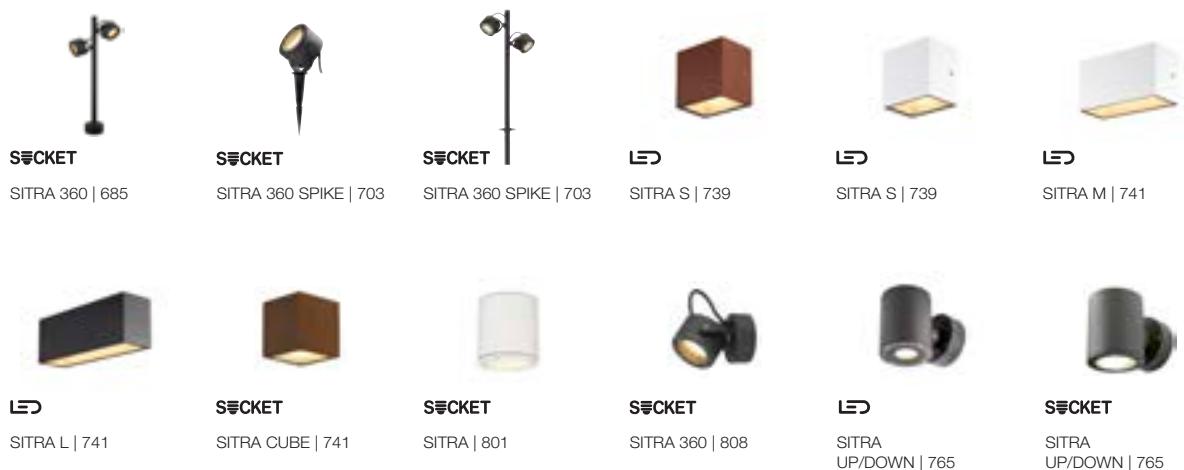

SLOTS



SOLASTO



S-SOCKET

SOLASTO | 857



S-SOCKET

SOLASTO | 857

SOMNILA



LED

SOMNILA SPOT | 384



LED

SOMNILA SPOT | 385



LED

SOMNILA FLEX | 385



LED

SOMNILA FLEX | 385

SQUARE



S-SOCKET

SQUARE
POLE 30/60/90 | 673



S-SOCKET

SQUARE | 779



S-SOCKET

SQUARE TURN | 781

S-TUBE



S-SOCKET

S-TUBE 32/75 | 603



S-SOCKET

S-TUBE | 805



SUN



SOCKET

SUN / BIG SUN | 315



SOCKET

TINY SUN | 443



SOCKET

LITTLE SUN | 443

SYNA



LED

SYNA PLANT | 689



LED

SYNA GARDEN | 689



LED

SYNA | 689

THEO



SOCKET

THEO UP/DOWN | 377



SOCKET

THEO PATHLIGHT | 652



SOCKET

THEO BRACKET | 701



SOCKET

THEO UP/DOWN | 735



LED

BIG THEO BEAM UP/
FLOOD DOWN | 735

SOCKET

BIG THEO UP/DOWN | 735



LED

BIG THEO FLOOD
UP/DOWN | 736

SOCKET

THEO | 736



SOCKET

BIG THEO | 737



LED

BIG THEO | 737



LED

BIG THEO | 797



SOCKET

BIG THEO | 797



SOCKET

THEO BRACKET | 808

TRILEDO



SOCKET

TRILEDO | 255



SOCKET

TRILEDO | 255



SOCKET

TRILEDO | 255



LED

TRILEDO | 257



LED

TRILEDO | 257



LED

TRILEDO | 257

TRUKKO



LED

TRUKKO | 330



LED

TRUKKO | 330



LED

TRUKKO | 331



LED

TRUKKO 80 | 331



LED

TRUKKO 60 | 332



LED

TRUKKO 90 | 332

UNIVERSAL DOWNLIGHT



LED

UNIVERSAL
DOWNLIGHT | 205



LED

UNIVERSAL
DOWNLIGHT | 207



LED

UNIVERSAL
DOWNLIGHT | 208



LED

UNIVERSAL
DOWNLIGHT | 209

VILUA



LED

VILUA S | 763



LED

VILUA L | 763



LED

VILUA | 763



VINOLINA



WL



WORKLIGHT



NUMINOS® GIMBLE
1005817



Discover the
NUMINOS® Configurator
at slv.com



NUMINOS® Downlights (DL)



The NUMINOS® DL
colours can be
chosen as desired



black - black



black - white



black - chrome



NUMINOS® GIMBLE
355° rotation and
60° pivot angle



white - black



white - white



white - chrome



NUMINOS® MOVE
355° rotation and
30° pivot angle

Detailed measurements and assembly information can be found on pages 118–119
Driver not included. You can find suitable drivers and diffusers on pages 94–95



Low-voltage plug

200mA

Power consumption: 7W
Material: aluminium/polycarbonate (PC)

250mA

Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

	20°	640lm	1005499	670lm	1003769
2700K	40°	620lm	1005502	670lm	1003772
	55°	640lm	1005505	670lm	1003775
	20°	700lm	1005517	690lm	1003793
3000K	40°	670lm	1005520	690lm	1003796
	55°	690lm	1005523	690lm	1003799
	20°	720lm	1005535	730lm	1003817
4000K	40°	700lm	1005538	730lm	1003820
	55°	710lm	1005541	730lm	1003823
	20°	670lm	1005500	720lm	1003770
2700K	40°	650lm	1005503	720lm	1003773
	55°	670lm	1005506	720lm	1003776
	20°	730lm	1005518	730lm	1003794
3000K	40°	700lm	1005521	730lm	1003797
	55°	720lm	1005524	730lm	1003800
	20°	750lm	1005536	790lm	1003818
4000K	40°	730lm	1005539	790lm	1003821
	55°	740lm	1005542	790lm	1003824
	20°	670lm	1005501	690lm	1003771
2700K	40°	650lm	1005504	690lm	1003774
	55°	670lm	1005507	690lm	1003777
	20°	730lm	1005519	700lm	1003795
3000K	40°	700lm	1005522	700lm	1003798
	55°	720lm	1005525	700lm	1003801
	20°	750lm	1005537	750lm	1003819
4000K	40°	730lm	1005540	750lm	1003822
	55°	740lm	1005543	750lm	1003825
	20°	640lm	1005508	670lm	1003781
2700K	40°	620lm	1005511	670lm	1003784
	55°	640lm	1005514	670lm	1003787
	20°	700lm	1005526	690lm	1003805
3000K	40°	670lm	1005529	690lm	1003808
	55°	690lm	1005532	690lm	1003811
	20°	720lm	1005544	730lm	1003829
4000K	40°	700lm	1005547	730lm	1003832
	55°	710lm	1005550	730lm	1003835
	20°	670lm	1005509	720lm	1003782
2700K	40°	650lm	1005512	720lm	1003785
	55°	670lm	1005515	720lm	1003788
	20°	730lm	1005527	730lm	1003806
3000K	40°	700lm	1005530	730lm	1003809
	55°	720lm	1005533	730lm	1003812
	20°	750lm	1005545	790lm	1003830
4000K	40°	730lm	1005548	790lm	1003833
	55°	740lm	1005551	790lm	1003836
	20°	670lm	1005510	690lm	1003783
2700K	40°	650lm	1005513	690lm	1003786
	55°	670lm	1005516	690lm	1003789
	20°	730lm	1005528	700lm	1003807
3000K	40°	700lm	1005531	700lm	1003810
	55°	720lm	1005534	700lm	1003813
	20°	750lm	1005546	750lm	1003831
4000K	40°	730lm	1005549	750lm	1003834
	55°	740lm	1005552	750lm	1003837



		M 500mA Power consumption: 17.5W Material: aluminium/polycarbonate (PC)	L 700mA Power consumption: 25.4W Material: aluminium/polycarbonate (PC)	XL 1050mA Power consumption: 37.4W Material: aluminium/polycarbonate (PC)
	20°	1460lm 1003841	2150lm 1003913	3300lm 1003985
	40°	1460lm 1003844	2150lm 1003916	3300lm 1003988
	55°	1460lm 1003847	2150lm 1003919	3300lm 1003991
	20°	1500lm 1003865	2150lm 1003937	3300lm 1004009
	40°	1500lm 1003868	2150lm 1003940	3300lm 1004012
	55°	1500lm 1003871	2150lm 1003943	3300lm 1004015
	20°	1600lm 1003889	2350lm 1003961	3600lm 1004033
	40°	1600lm 1003892	2350lm 1003964	3600lm 1004036
	55°	1600lm 1003895	2350lm 1003967	3600lm 1004039
	20°	1600lm 1003842	2250lm 1003914	3500lm 1003986
	40°	1600lm 1003845	2250lm 1003917	3500lm 1003989
	55°	1600lm 1003848	2250lm 1003920	3500lm 1003992
	20°	1600lm 1003866	2300lm 1003938	3550lm 1004010
	40°	1600lm 1003869	2300lm 1003941	3550lm 1004013
	55°	1600lm 1003872	2300lm 1003944	3550lm 1004016
	20°	1750lm 1003890	2450lm 1003962	3800lm 1004034
	40°	1750lm 1003893	2450lm 1003965	3800lm 1004037
	55°	1750lm 1003896	2450lm 1003968	3800lm 1004040
	20°	1550lm 1003843	2150lm 1003915	3400lm 1003987
	40°	1550lm 1003846	2150lm 1003918	3400lm 1003990
	55°	1550lm 1003849	2150lm 1003921	3400lm 1003993
	20°	1550lm 1003867	2200lm 1003939	3500lm 1004011
	40°	1550lm 1003870	2200lm 1003942	3500lm 1004014
	55°	1550lm 1003873	2200lm 1003945	3500lm 1004017
	20°	1660lm 1003891	2350lm 1003963	3750lm 1004035
	40°	1660lm 1003894	2350lm 1003966	3750lm 1004038
	55°	1660lm 1003897	2350lm 1003969	3750lm 1004041
	20°	1460lm 1003853	2150lm 1003925	3300lm 1003997
	40°	1460lm 1003856	2150lm 1003928	3300lm 1004000
	55°	1460lm 1003859	2150lm 1003931	3300lm 1004003
	20°	1500lm 1003877	2150lm 1003949	3300lm 1004021
	40°	1500lm 1003880	2150lm 1003952	3300lm 1004024
	55°	1500lm 1003883	2150lm 1003955	3300lm 1004027
	20°	1600lm 1003901	2350lm 1003973	3600lm 1004045
	40°	1600lm 1003904	2350lm 1003976	3600lm 1004048
	55°	1600lm 1003907	2350lm 1003979	3600lm 1004051
	20°	1600lm 1003854	2250lm 1003926	3500lm 1003998
	40°	1600lm 1003857	2250lm 1003929	3500lm 1004001
	55°	1600lm 1003860	2250lm 1003932	3500lm 1004004
	20°	1600lm 1003878	2300lm 1003950	3550lm 1004022
	40°	1600lm 1003881	2300lm 1003953	3550lm 1004025
	55°	1600lm 1003884	2300lm 1003956	3550lm 1004028
	20°	1750lm 1003902	2450lm 1003974	3800lm 1004046
	40°	1750lm 1003905	2450lm 1003977	3800lm 1004049
	55°	1750lm 1003908	2450lm 1003980	3800lm 1004052
	20°	1550lm 1003855	2150lm 1003927	3400lm 1003999
	40°	1550lm 1003858	2150lm 1003930	3400lm 1004002
	55°	1550lm 1003861	2150lm 1003933	3400lm 1004005
	20°	1550lm 1003879	2200lm 1003951	3500lm 1004023
	40°	1550lm 1003882	2200lm 1003954	3500lm 1004026
	55°	1550lm 1003885	2200lm 1003957	3500lm 1004029
	20°	1660lm 1003903	2350lm 1003975	3750lm 1004047
	40°	1660lm 1003906	2350lm 1003978	3750lm 1004050
	55°	1660lm 1003909	2350lm 1003981	3750lm 1004053

NUMINOS® MOVE DL



Low-voltage plug

XS 200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)


S 250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

	20°	640lm	1005553	670lm	1005319
2700K	40°	620lm	1005556	670lm	1005322
	55°	640lm	1005559	670lm	1005325
	20°	700lm	1005571	690lm	1005337
3000K	40°	670lm	1005574	690lm	1005340
	55°	690lm	1005577	690lm	1005343
	20°	720lm	1005589	730lm	1005355
4000K	40°	700lm	1005592	730lm	1005358
	55°	710lm	1005595	730lm	1005361
	20°	670lm	1005554	720lm	1005320
2700K	40°	650lm	1005557	720lm	1005323
	55°	670lm	1005560	720lm	1005326
	20°	730lm	1005572	730lm	1005338
3000K	40°	700lm	1005575	730lm	1005341
	55°	720lm	1005578	730lm	1005344
	20°	750lm	1005590	790lm	1005356
4000K	40°	730lm	1005593	790lm	1005359
	55°	740lm	1005596	790lm	1005362
	20°	670lm	1005555	690lm	1005321
2700K	40°	650lm	1005558	690lm	1005324
	55°	670lm	1005561	690lm	1005327
	20°	730lm	1005573	700lm	1005339
3000K	40°	700lm	1005576	700lm	1005342
	55°	720lm	1005579	700lm	1005345
	20°	750lm	1005591	750lm	1005357
4000K	40°	730lm	1005594	750lm	1005360
	55°	740lm	1005597	750lm	1005363
	20°	640lm	1005562	670lm	1005328
2700K	40°	620lm	1005565	670lm	1005331
	55°	640lm	1005568	670lm	1005334
	20°	700lm	1005580	690lm	1005346
3000K	40°	670lm	1005583	690lm	1005349
	55°	690lm	1005586	690lm	1005352
	20°	720lm	1005598	730lm	1005364
4000K	40°	700lm	1005603	730lm	1005367
	55°	710lm	1005606	730lm	1005370
	20°	670lm	1005563	720lm	1005329
2700K	40°	650lm	1005566	720lm	1005332
	55°	670lm	1005569	720lm	1005335
	20°	730lm	1005581	730lm	1005347
3000K	40°	700lm	1005584	730lm	1005350
	55°	720lm	1005587	730lm	1005353
	20°	750lm	1005599	790lm	1005365
4000K	40°	730lm	1005604	790lm	1005368
	55°	740lm	1005607	790lm	1005371
	20°	670lm	1005564	690lm	1005330
2700K	40°	650lm	1005567	690lm	1005333
	55°	670lm	1005570	690lm	1005336
	20°	730lm	1005582	700lm	1005348
3000K	40°	700lm	1005585	700lm	1005351
	55°	720lm	1005588	700lm	1005354
	20°	750lm	1005600	750lm	1005366
4000K	40°	730lm	1005605	750lm	1005369
	55°	740lm	1005608	750lm	1005372



		M 500mA Power consumption: 17.5W Material: aluminium/polycarbonate (PC)	L 700mA Power consumption: 25.4W Material: aluminium/polycarbonate (PC)	XL 1050mA Power consumption: 37.4W Material: aluminium/polycarbonate (PC)
	20°	1460lm 1003553	2150lm 1003625	3300lm 1003697
	40°	1460lm 1003556	2150lm 1003628	3300lm 1003700
	55°	1460lm 1003559	2150lm 1003631	3300lm 1003703
	20°	1500lm 1003577	2150lm 1003649	3300lm 1003721
	40°	1500lm 1003580	2150lm 1003652	3300lm 1003724
	55°	1500lm 1003583	2150lm 1003655	3300lm 1003727
	20°	1600lm 1003601	2350lm 1003673	3600lm 1003745
	40°	1600lm 1003604	2350lm 1003676	3600lm 1003748
	55°	1600lm 1003607	2350lm 1003679	3600lm 1003751
	20°	1600lm 1003554	2250lm 1003626	3500lm 1003698
	40°	1600lm 1003557	2250lm 1003629	3500lm 1003701
	55°	1600lm 1003560	2250lm 1003632	3500lm 1003704
	20°	1600lm 1003578	2300lm 1003650	3550lm 1003722
	40°	1600lm 1003581	2300lm 1003653	3550lm 1003725
	55°	1600lm 1003584	2300lm 1003656	3550lm 1003728
	20°	1750lm 1003602	2450lm 1003674	3800lm 1003746
	40°	1750lm 1003605	2450lm 1003677	3800lm 1003749
	55°	1750lm 1003608	2450lm 1003680	3800lm 1003752
	20°	1550lm 1003555	2150lm 1003627	3400lm 1003699
	40°	1550lm 1003558	2150lm 1003630	3400lm 1003702
	55°	1550lm 1003561	2150lm 1003633	3400lm 1003705
	20°	1550lm 1003579	2200lm 1003651	3500lm 1003723
	40°	1550lm 1003582	2200lm 1003654	3500lm 1003726
	55°	1550lm 1003585	2200lm 1003657	3500lm 1003729
	20°	1660lm 1003603	2350lm 1003675	3750lm 1003747
	40°	1660lm 1003606	2350lm 1003678	3750lm 1003750
	55°	1660lm 1003609	2350lm 1003681	3750lm 1003753
	20°	1460lm 1003565	2150lm 1003637	3300lm 1003709
	40°	1460lm 1003568	2150lm 1003640	3300lm 1003712
	55°	1460lm 1003571	2150lm 1003643	3300lm 1003715
	20°	1500lm 1003589	2150lm 1003661	3300lm 1003733
	40°	1500lm 1003592	2150lm 1003664	3300lm 1003736
	55°	1500lm 1003595	2150lm 1003667	3300lm 1003739
	20°	1600lm 1003613	2350lm 1003685	3600lm 1003757
	40°	1600lm 1003616	2350lm 1003688	3600lm 1003760
	55°	1600lm 1003619	2350lm 1003691	3600lm 1003763
	20°	1600lm 1003566	2250lm 1003638	3500lm 1003710
	40°	1600lm 1003569	2250lm 1003641	3500lm 1003713
	55°	1600lm 1003572	2250lm 1003644	3500lm 1003716
	20°	1600lm 1003590	2300lm 1003662	3550lm 1003734
	40°	1600lm 1003593	2300lm 1003665	3550lm 1003737
	55°	1600lm 1003596	2300lm 1003668	3550lm 1003740
	20°	1750lm 1003614	2450lm 1003686	3800lm 1003758
	40°	1750lm 1003617	2450lm 1003689	3800lm 1003761
	55°	1750lm 1003620	2450lm 1003692	3800lm 1003764
	20°	1550lm 1003567	2150lm 1003639	3400lm 1003711
	40°	1550lm 1003570	2150lm 1003642	3400lm 1003714
	55°	1550lm 1003573	2150lm 1003645	3400lm 1003717
	20°	1550lm 1003591	2200lm 1003663	3500lm 1003735
	40°	1550lm 1003594	2200lm 1003666	3500lm 1003738
	55°	1550lm 1003597	2200lm 1003669	3500lm 1003741
	20°	1660lm 1003615	2350lm 1003687	3750lm 1003759
	40°	1660lm 1003618	2350lm 1003690	3750lm 1003762
	55°	1660lm 1003621	2350lm 1003693	3750lm 1003765

NUMINOS® GIMBLE DL



Low-voltage plug

XS 200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)

S 250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)

	20°	640lm	1005813	670lm	1005867
2700K	40°	620lm	1005816	670lm	1005870
	55°	640lm	1005819	670lm	1005873
	20°	700lm	1005831	690lm	1005885
3000K	40°	670lm	1005834	690lm	1005888
	55°	690lm	1005837	690lm	1005891
	20°	720lm	1005849	730lm	1005903
4000K	40°	700lm	1005852	730lm	1005906
	55°	710lm	1005855	730lm	1005909
	20°	670lm	1005814	720lm	1005868
2700K	40°	650lm	1005817	720lm	1005871
	55°	670lm	1005820	720lm	1005874
	20°	730lm	1005832	730lm	1005886
3000K	40°	700lm	1005835	730lm	1005889
	55°	720lm	1005838	730lm	1005892
	20°	750lm	1005850	790lm	1005904
4000K	40°	730lm	1005853	790lm	1005907
	55°	740lm	1005856	790lm	1005910
	20°	670lm	1005815	690lm	1005869
2700K	40°	650lm	1005818	690lm	1005872
	55°	670lm	1005821	690lm	1005875
	20°	730lm	1005833	700lm	1005887
3000K	40°	700lm	1005836	700lm	1005890
	55°	720lm	1005839	700lm	1005893
	20°	750lm	1005851	750lm	1005905
4000K	40°	730lm	1005854	750lm	1005908
	55°	740lm	1005857	750lm	1005911
	20°	640lm	1005822	670lm	1005876
2700K	40°	620lm	1005825	670lm	1005879
	55°	640lm	1005828	670lm	1005882
	20°	700lm	1005840	690lm	1005894
3000K	40°	670lm	1005843	690lm	1005897
	55°	690lm	1005846	690lm	1005900
	20°	720lm	1005858	730lm	1005912
4000K	40°	700lm	1005861	730lm	1005915
	55°	710lm	1005864	730lm	1005918
	20°	670lm	1005823	720lm	1005877
2700K	40°	650lm	1005826	720lm	1005880
	55°	670lm	1005829	720lm	1005883
	20°	730lm	1005841	730lm	1005895
3000K	40°	700lm	1005844	730lm	1005898
	55°	720lm	1005847	730lm	1005901
	20°	750lm	1005859	790lm	1005913
4000K	40°	730lm	1005862	790lm	1005916
	55°	740lm	1005865	790lm	1005919
	20°	670lm	1005824	690lm	1005878
2700K	40°	650lm	1005827	690lm	1005881
	55°	670lm	1005830	690lm	1005884
	20°	730lm	1005842	700lm	1005896
3000K	40°	700lm	1005845	700lm	1005899
	55°	720lm	1005848	700lm	1005902
	20°	750lm	1005860	750lm	1005914
4000K	40°	730lm	1005863	750lm	1005917
	55°	740lm	1005866	750lm	1005920



	M	500mA Power consumption: 17.5W Material: aluminium/polycarbonate (PC)	L	700mA Power consumption: 25.4W Material: aluminium/polycarbonate (PC)	XL	1000/1050mA Power consumption: 37.4W Material: aluminium/polycarbonate (PC)
	20°	1460lm 1005921	2150lm 1005975	3300lm 1006029		
	40°	1460lm 1005924	2150lm 1005978	3300lm 1006032		
	55°	1460lm 1005927	2150lm 1005981	3300lm 1006035		
	20°	1500lm 1005939	2150lm 1005993	3300lm 1006047		
	40°	1500lm 1005942	2150lm 1005996	3300lm 1006050		
	55°	1500lm 1005945	2150lm 1005999	3300lm 1006053		
	20°	1600lm 1005957	2350lm 1006011	3600lm 1006065		
	40°	1600lm 1005960	2350lm 1006014	3600lm 1006068		
	55°	1600lm 1005963	2350lm 1006017	3600lm 1006071		
	20°	1600lm 1005922	2250lm 1005976	3500lm 1006030		
	40°	1600lm 1005925	2250lm 1005979	3500lm 1006033		
	55°	1600lm 1005928	2250lm 1005982	3500lm 1006036		
	20°	1600lm 1005940	2300lm 1005994	3550lm 1006048		
	40°	1600lm 1005943	2300lm 1005997	3550lm 1006051		
	55°	1600lm 1005946	2300lm 1006000	3550lm 1006054		
	20°	1750lm 1005958	2450lm 1006012	3800lm 1006066		
	40°	1750lm 1005961	2450lm 1006015	3800lm 1006069		
	55°	1750lm 1005964	2450lm 1006018	3800lm 1006072		
	20°	1550lm 1005923	2150lm 1005977	3400lm 1006031		
	40°	1550lm 1005926	2150lm 1005980	3400lm 1006034		
	55°	1550lm 1005929	2150lm 1005983	3400lm 1006037		
	20°	1550lm 1005941	2200lm 1005995	3500lm 1006049		
	40°	1550lm 1005944	2200lm 1005998	3500lm 1006052		
	55°	1550lm 1005947	2200lm 1006001	3500lm 1006055		
	20°	1660lm 1005959	2350lm 1006013	3750lm 1006067		
	40°	1660lm 1005962	2350lm 1006016	3750lm 1006070		
	55°	1660lm 1005965	2350lm 1006019	3750lm 1006073		
	20°	1460lm 1005930	2150lm 1005984	3300lm 1006038		
	40°	1460lm 1005933	2150lm 1005987	3300lm 1006041		
	55°	1460lm 1005936	2150lm 1005990	3300lm 1006044		
	20°	1500lm 1005948	2150lm 1006002	3300lm 1006056		
	40°	1500lm 1005951	2150lm 1006005	3300lm 1006059		
	55°	1500lm 1005954	2150lm 1006008	3300lm 1006062		
	20°	1600lm 1005966	2350lm 1006020	3600lm 1006074		
	40°	1600lm 1005969	2350lm 1006023	3600lm 1006077		
	55°	1600lm 1005972	2350lm 1006026	3600lm 1006080		
	20°	1600lm 1005931	2250lm 1005985	3500lm 1006039		
	40°	1600lm 1005934	2250lm 1005988	3500lm 1006042		
	55°	1600lm 1005937	2250lm 1005991	3500lm 1006045		
	20°	1600lm 1005949	2300lm 1006003	3550lm 1006057		
	40°	1600lm 1005952	2300lm 1006006	3550lm 1006060		
	55°	1600lm 1005955	2300lm 1006009	3550lm 1006063		
	20°	1750lm 1005967	2450lm 1006021	3800lm 1006075		
	40°	1750lm 1005970	2450lm 1006024	3800lm 1006078		
	55°	1750lm 1005973	2450lm 1006027	3800lm 1006081		
	20°	1550lm 1005932	2150lm 1005986	3400lm 1006040		
	40°	1550lm 1005935	2150lm 1005989	3400lm 1006043		
	55°	1550lm 1005938	2150lm 1005992	3400lm 1006046		
	20°	1550lm 1005950	2200lm 1006004	3500lm 1006058		
	40°	1550lm 1005953	2200lm 1006007	3500lm 1006061		
	55°	1550lm 1005956	2200lm 1006010	3500lm 1006064		
	20°	1660lm 1005968	2350lm 1006022	3750lm 1006076		
	40°	1660lm 1005971	2350lm 1006025	3750lm 1006079		
	55°	1660lm 1005974	2350lm 1006028	3750lm 1006082		

NUMINOS® PROJECTOR
1006978





NUMINOS® PROJECTOR Downlight (DL)

NEW

LED
INSIDE

The application of the
NUMINOS® PROJECTOR
can be individually chosen




Expansion of the
NUMINOS® series
in sizes XS-L



Detailed measurements and assembly information can be found on pages 118–119
Driver not included. You can find suitable drivers and diffusers on pages 94–95

NUMINOS® PROJECTOR DL Move



NEW

Low-voltage plug

XS 200mA
Power consumption: 7W Material:
aluminium

S 250mA
Power consumption: 8.6W
Material: aluminium

	20°	640lm	1006867	670lm	1006921
2700K	40°	620lm	1006870	670lm	1006924
	55°	640lm	1006873	670lm	1006927
	20°	700lm	1006885	690lm	1006939
	40°	670lm	1006888	690lm	1006942
3000K	55°	690lm	1006891	690lm	1006945
	20°	730lm	1006868	730lm	1006922
	40°	700lm	1006871	730lm	1006925
	55°	720lm	1006874	730lm	1006928
2700K	20°	670lm	1006886	690lm	1006940
	40°	650lm	1006889	690lm	1006943
	55°	670lm	1006892	690lm	1006946
	20°	670lm	1006869	720lm	1006923
3000K	40°	650lm	1006872	720lm	1006926
	55°	670lm	1006875	720lm	1006929
	20°	730lm	1006887	730lm	1006941
	40°	700lm	1006890	730lm	1006944
2700K	55°	720lm	1006893	730lm	1006947
	20°	700lm	1006876	690lm	1006930
	40°	670lm	1006879	690lm	1006933
	55°	690lm	1006882	690lm	1006936
3000K	20°	670lm	1006894	690lm	1006948
	40°	650lm	1006897	690lm	1006951
	55°	670lm	1006900	690lm	1006954
	20°	670lm	1006877	720lm	1006931
3000K	40°	650lm	1006880	720lm	1006934
	55°	670lm	1006883	720lm	1006937
	20°	730lm	1006895	730lm	1006949
	40°	700lm	1006898	730lm	1006952
2700K	55°	720lm	1006901	730lm	1006955
	20°	670lm	1006878	690lm	1006932
	40°	650lm	1006881	690lm	1006935
	55°	670lm	1006884	690lm	1006938
3000K	20°	730lm	1006896	700lm	1006950
	40°	700lm	1006899	700lm	1006953
	55°	720lm	1006902	700lm	1006956

These lights are also available as 4000K versions on request (except XS).
Please note the different delivery times and minimum order quantities.



M 500mA
Power consumption: 17.5W
Material: aluminium

L 700mA
Power consumption: 25.4W
Material: aluminium

		20°	1460lm	1006975	2150lm	1007029
2700K		40°	1460lm	1006978	2150lm	1007032
		55°	1460lm	1006981	2150lm	1007035
		20°	1500lm	1006993	2150lm	1007047
3000K		40°	1500lm	1006996	2150lm	1007050
		55°	1500lm	1006999	2150lm	1007053
		20°	1600lm	1006976	2300lm	1007030
2700K		40°	1600lm	1006979	2300lm	1007033
		55°	1600lm	1006982	2300lm	1007036
		20°	1550lm	1006994	2150lm	1007048
3000K		40°	1550lm	1006997	2150lm	1007051
		55°	1550lm	1007000	2150lm	1007054
		20°	1600lm	1006977	2250lm	1007031
2700K		40°	1600lm	1006980	2250lm	1007034
		55°	1600lm	1006983	2250lm	1007037
		20°	1600lm	1006995	2300lm	1007049
3000K		40°	1600lm	1006998	2300lm	1007052
		55°	1600lm	1007001	2300lm	1007055
		20°	1500lm	1006984	2150lm	1007038
2700K		40°	1500lm	1006987	2150lm	1007041
		55°	1500lm	1006990	2150lm	1007044
		20°	1550lm	1007002	2150lm	1007056
3000K		40°	1550lm	1007005	2150lm	1007059
		55°	1550lm	1007008	2150lm	1007062
		20°	1600lm	1006985	2250lm	1007039
2700K		40°	1600lm	1006988	2250lm	1007042
		55°	1600lm	1006991	2250lm	1007045
		20°	1600lm	1007003	2300lm	1007057
3000K		40°	1600lm	1007006	2300lm	1007060
		55°	1600lm	1007009	2300lm	1007063
		20°	1550lm	1006986	2150lm	1007040
2700K		40°	1550lm	1006989	2150lm	1007043
		55°	1550lm	1006992	2150lm	1007046
		20°	1550lm	1007004	2200lm	1007058
3000K		40°	1550lm	1007007	2200lm	1007061
		55°	1550lm	1007010	2200lm	1007064

These lights are also available as 4000K versions on request (except XS).
Please note the different delivery times and minimum order quantities.

MATCHING DRIVER

XS S M L XL



LED driver 200mA, 10W QC	white	5,8W / 8,4W	-		L: 6.5 cm, W: 3.9 cm, H: 3.5 cm	1005610
LED driver 200mA, 10W, PHASE QC	white	6W / 8,4W	PHASE C		L: 8.5 cm, W: 4.1 cm, H: 3 cm	1005609
LED driver 200mA, 10W, DALI QC	white	3,8W / 13,5W	DALI	IP20	L: 18 cm, W: 4.5 cm, H: 3 cm	1005611
LED driver 200mA, 12W, DALI + RF Interface QC	white	1,5W / 12W	DALI + RF		L: 14.2 cm, W: 4.4 cm, H: 3 cm	1006457
LED driver 250mA, 10W	white	6,5W / 10W	-		L: 6.5 cm, W: 3.9 cm, H: 2 cm	1004058
LED driver 250mA, 10W, PHASE	white	7,5W / 10W	PHASE C	IP20	L: 8.5 cm, W: 3.9 cm, H: 3 cm	1004055
LED driver 250mA, 20W, DALI	white	1,5W / 15W	DALI		L: 15 cm, W: 5.2 cm, H: 2.8 cm	1004067
LED driver 250mA, 12W, DALI + RF Interface QC	white	1,5W / 12W	DALI + RF		L: 14.2 cm, W: 4.4 cm, H: 3 cm	1006458
LED driver 500mA, 30W	white	15W / 29,5W	-		L: 14.7 cm, W: 4.3 cm, H: 3 cm	1004064
LED driver 500mA, 30W, PHASE	white	12,5W / 21W	PHASE C	IP20	L: 11.5 cm, W: 4.1 cm, H: 2.5 cm	1004054
LED driver 500mA, 40W, DALI,	white	1,5W / 40,6W	DALI		L: 12.3 cm, W: 7.9 cm, H: 2.4 cm	1004069
LED driver 500mA, 42W, DALI + RF Interface QC	white	3,5W / 42W	DALI + RF		L: 12.3 cm, W: 7.9 cm, H: 3 cm	1006459
LED driver 700mA, 30W	white	15W / 29,5W	-		L: 14.7 cm, W: 4.3 cm, H: 3 cm	1004062
LED driver 700mA, 30W, PHASE	white	21W / 29,4W	PHASE C	IP20	L: 11.5 cm, W: 4.4 cm, H: 3 cm	1004065
LED driver 700mA, 40W, DALI	white	1,5W / 40,6W	DALI		L: 12.3 cm, W: 7.9 cm, H: 2.4 cm	1004070
LED driver 700mA, 42W, DALI + RF Interface QC	white	3,5W / 42W	DALI + RF		L: 12.3 cm, W: 7.9 cm, H: 3 cm	1006460
LED driver 1050mA, 40W	white	24W / 44W	-		L: 9.7 cm, W: 4.3 cm, H: 3 cm	1004059
LED driver 1000mA, 40W, PHASE	white	26,3W / 42W	PHASE C	IP20	L: 14.5 cm, W: 4 cm, H: 3 cm	1004066
LED driver 1050mA, 50W, DALI	white	4,2W / 50W	DALI		L: 12.3 cm, W: 7.9 cm, H: 2.4 cm	1004071



An old recessed ceiling light, often still fitted with conventional bulbs, should give way to an energy-efficient and cost-effective alternative. When removing the old fitting, a larger ceiling cut-out will often be required than before.

SLV has the perfect solution for this: the reducer ring completely covers the larger ceiling cut-out, while at the same time providing perfect support for your new, compact, recessed ceiling light. Our reducer rings are also perfectly coordinated with the NUMINOS® downlight and spotlight system.



DIFFUSERS AND REDUCER RINGS

XS S M L XL



Diffuser NUMINOS® XS	Ellipse	IP20	Diameter: 3.2 cm, H 0.2 cm	1005612
	Prism			1005613
	Frosted			1005614
	Honeycomb			1005615
Diffuser NUMINOS® S	Ellipse	IP20	Diameter: 4 cm, H: 0.2 cm	1004786
	Prism			1004787
	Frosted			1004788
	Honeycomb			1004789
Diffuser NUMINOS® M	Ellipse	IP20	Diameter: 4.75 cm, H 0.2 cm	1004790
	Prism			1004791
	Frosted			1004792
	Honeycomb			1004793
Diffuser NUMINOS® L	Ellipse	IP20	Diameter: 5.65 cm, H: 0.2 cm	1004794
	Prism			1004795
	Frosted			1004796
	Honeycomb			1004797
Diffuser NUMINOS® XL	Ellipse	IP20	Diameter: 7.1 cm, H: 0.2 cm	1004798
	Prism			1004799
	Frosted			1004800
	Honeycomb			1004801









Reducer ring <i>Round</i>	black	Ceiling cut-out: 8.5-13 cm	Outer diameter: 16 cm, Inner diameter: 7 cm H: 5.3 cm	1006135
	white			1006136
	black	Ceiling cut-out: 12-15 cm	Outer diameter: 16 cm, Inner diameter: 9 cm H: 5.3 cm	1006139
	white			1006140
	black	Ceiling cut-out: 14-18 cm	Outer diameter: 24 cm, Inner diameter: 12 cm H: 5.3 cm	1006143
	white			1006144
Reducer ring <i>Square</i>	black	Ceiling cut-out: 17-20 cm	Outer diameter: 24 cm, Inner diameter: 15 cm H: 5.3 cm	1006147
	white			1006148
	black	Ceiling cut-out: 20-22 cm	Outer diameter: 24 cm, Inner diameter: 18 cm H: 5.3 cm	1006151
	white			1006152
	black	Ceiling cut-out: 8.5-13 cm	Inner diameter: 7 cm L: 16 cm, W: 16 cm, H: 5.3 cm	1006137
	white			1006138
Reducer ring <i>Square</i>	black	Ceiling cut-out: 12-15 cm	Inner diameter: 9 cm L: 16 cm, W: 16 cm, H: 5.3 cm	1006141
	white			1006142
	black	Ceiling cut-out: 14-18 cm	Inner diameter: 12 cm L: 24 cm, W: 24 cm, H: 5.3 cm	1006145
	white			1006146
	black	Ceiling cut-out: 17-20 cm	Inner diameter: 15 cm L: 24 cm, W: 24 cm, H: 5.3 cm	1006149
	white			1006150
	black	Ceiling cut-out: 20-22 cm	Inner diameter: 18 cm L: 24 cm, W: 24 cm, H: 5.3 cm	1006153
	white			1006154

NUMINOS® PROJECTOR

What to choose for your NUMINOS® PROJECTOR:

You can choose from six colour versions, four housing sizes with different total wattages, two light colours and three half-diffusion angles of 20°, 44° and 55°.

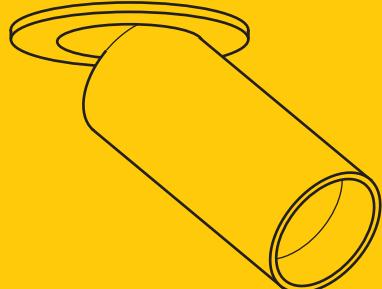


NUMINOS® is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.




Discover the variety of
the NUMINOS® series
at slv.com

The new NUMINOS® PROJECTOR with a very high rotation and pivot range is a good complement to the NUMINOS® downlights, which have the same decorative and visual possibilities.

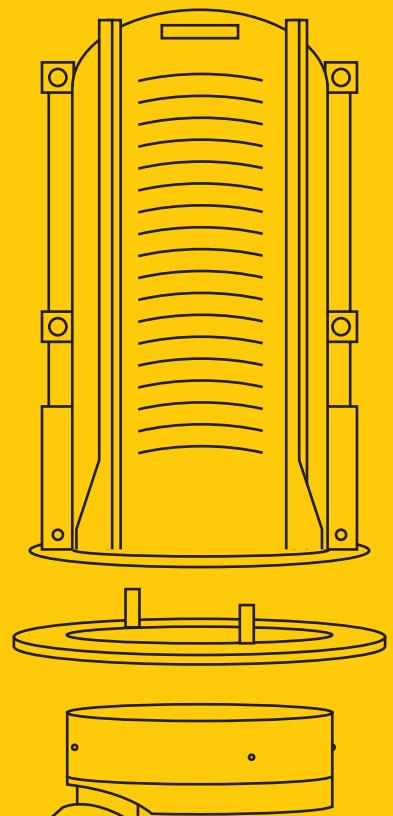

Available in four housing sizes with high-power LED module in two light colours.

LED drivers are available separately.

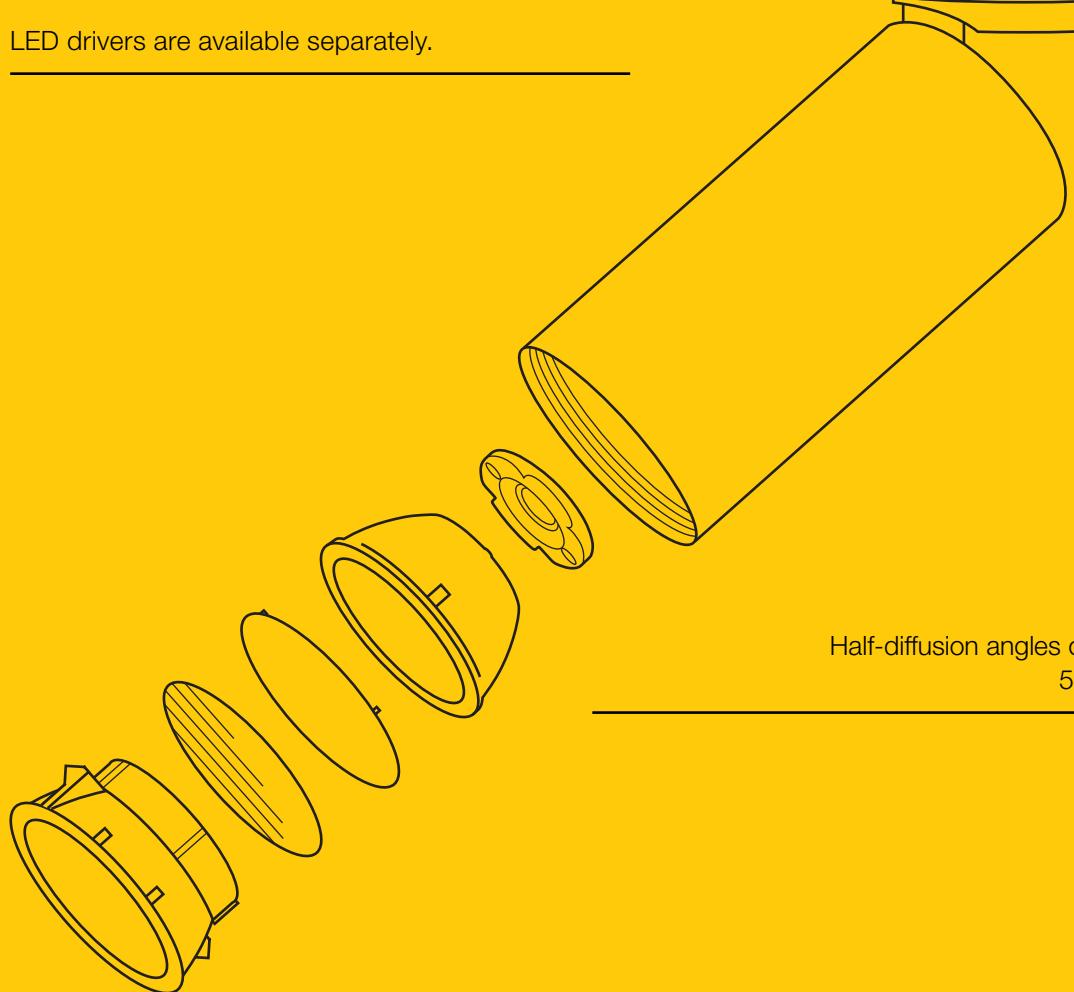

Half-diffusion angles of 20° | 40° | 55° available.

NUMINOS® CW
1004587

CLUB LOUNGE 1

TIVOLI






NUMINOS®
Ceiling and wall lights (CW)



NUMINOS® CW
Can be pivoted 90°
and rotated 350°



Decorative ring also
available in white



Decorative ring NUMINOS® S	Diameter: 6.2 cm, H: 2 cm	<input type="radio"/>	1006167
Decorative ring NUMINOS® M	Diameter: 8.2 cm, H: 2.4 cm	<input type="radio"/>	1006168
Decorative ring NUMINOS® L	Diameter: 9.65 cm, H: 2.5 cm	<input type="radio"/>	1006169
Decorative ring NUMINOS® XL	Diameter: 11.66 cm H: 2.85 cm	<input type="radio"/>	1006170

Detailed measurements and assembly information can be found on pages 118–119



S 220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

M 220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

		24°	985lm	1004098	1925lm	1004194
C	2700K	36°	985lm	1004099	1935lm	1004195
		60°	980lm	1004100	1885lm	1004196
		24°	1020lm	1004106	1955lm	1004202
Dali	3000K	36°	1020lm	1004107	1970lm	1004203
		60°	1020lm	1004108	1880lm	1004204
		24°	1100lm	1004114	2125lm	1004210
C	4000K	36°	1100lm	1004115	2120lm	1004211
		60°	1100lm	1004116	2060lm	1004212
		24°	985lm	1004386	1925lm	1004482
Dali	2700K	36°	985lm	1004387	1935lm	1004483
		60°	980lm	1004388	1885lm	1004484
		24°	1020lm	1004394	1955lm	1004490
C	3000K	36°	1020lm	1004395	1970lm	1004491
		60°	1020lm	1004396	1880lm	1004492
		24°	1100lm	1004402	2125lm	1004498
Dali	4000K	36°	1100lm	1004403	2120lm	1004499
		60°	1100lm	1004404	2060lm	1004500
		24°	985lm	1004102	1925lm	1004198
C	2700K	36°	985lm	1004103	1935lm	1004199
		60°	980lm	1004104	1885lm	1004200
		24°	1020lm	1004110	1955lm	1004206
Dali	3000K	36°	1020lm	1004111	1970lm	1004207
		60°	1020lm	1004112	1880lm	1004208
		24°	1100lm	1004118	2125lm	1004214
C	4000K	36°	1100lm	1004119	2120lm	1004215
		60°	1100lm	1004120	2060lm	1004216
		24°	985lm	1004390	1925lm	1004486
Dali	2700K	36°	985lm	1004391	1935lm	1004487
		60°	980lm	1004392	1885lm	1004488
		24°	1020lm	1004398	1955lm	1004494
C	3000K	36°	1020lm	1004399	1970lm	1004495
		60°	1020lm	1004400	1880lm	1004496
		24°	1100lm	1004406	2125lm	1004502
Dali	4000K	36°	1100lm	1004407	2120lm	1004503
		60°	1100lm	1004408	2060lm	1004504



L 220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)

XL 220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)

	24°	2440lm	1004290	3290lm	1006083
 C	2700K	36°	2400lm	1004291	3250lm
		60°	2475lm	1004292	2980lm
		24°	2430lm	1004298	3530lm
 Dali	3000K	36°	2340lm	1004299	3490lm
		60°	2400lm	1004300	3210lm
		24°	2675lm	1004306	3800lm
 C	4000K	36°	2620lm	1004307	3760lm
		60°	2715lm	1004308	3460lm
		24°	2440lm	1004578	3290lm
 Dali	2700K	36°	2400lm	1004579	3250lm
		60°	2475lm	1004580	2980lm
		24°	2430lm	1004586	3530lm
 C	3000K	36°	2340lm	1004587	3490lm
		60°	2400lm	1004588	3210lm
		24°	2675lm	1004594	3800lm
 C	4000K	36°	2620lm	1004595	3760lm
		60°	2715lm	1004596	3460lm
		24°	2440lm	1004294	3290lm
 Dali	2700K	36°	2400lm	1004295	3250lm
		60°	2475lm	1004296	2980lm
		24°	2430lm	1004302	3530lm
 C	3000K	36°	2340lm	1004303	3490lm
		60°	2400lm	1004304	3210lm
		24°	2675lm	1004310	3800lm
 C	4000K	36°	2620lm	1004311	3760lm
		60°	2715lm	1004312	3460lm
		24°	2440lm	1004582	3290lm
 Dali	2700K	36°	2400lm	1004583	3250lm
		60°	2475lm	1004584	2980lm
		24°	2430lm	1004590	3530lm
 C	3000K	36°	2340lm	1004591	3490lm
		60°	2400lm	1004592	3210lm
		24°	2675lm	1004598	3800lm
 C	4000K	36°	2620lm	1004599	3760lm
		60°	2715lm	1004600	3460lm

NUMINOS® CL
1004227





NUMINOS®
Ceiling lights (CL)

LED
INSIDE



Discover the
variety in the
NUMINOS®
brochure

Decorative ring also
available in white



Decorative ring NUMINOS® S	Diameter: 6.2 cm, H: 2 cm	<input type="radio"/>	1006167
Decorative ring NUMINOS® M	Diameter: 8.2 cm, H: 2.4 cm	<input type="radio"/>	1006168
Decorative ring NUMINOS® L	Diameter: 9.65 cm, H: 2.5 cm	<input type="radio"/>	1006169
Decorative ring NUMINOS® XL	Diameter: 11.66 cm H: 2.85 cm	<input type="radio"/>	1006170



Detailed measurements and assembly information can be found on pages 118–119

S 220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

M 220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

		24°	985lm	1004122	1925lm	1004218
2700K		36°	985lm	1004123	1935lm	1004219
		60°	980lm	1004124	1885lm	1004220
		24°	1020lm	1004130	1955lm	1004226
3000K		36°	1020lm	1004131	1970lm	1004227
		60°	1020lm	1004132	1880lm	1004228
		24°	1100lm	1004138	2125lm	1004234
4000K		36°	1100lm	1004139	2120lm	1004235
		60°	1100lm	1004140	2060lm	1004236
		24°	985lm	1004410	1925lm	1004506
2700K		36°	985lm	1004411	1935lm	1004507
		60°	980lm	1004412	1885lm	1004508
		24°	1020lm	1004418	1955lm	1004514
3000K		36°	1020lm	1004419	1970lm	1004515
		60°	1020lm	1004420	1880lm	1004516
		24°	1100lm	1004426	2125lm	1004522
4000K		36°	1100lm	1004427	2120lm	1004523
		60°	1100lm	1004428	2060lm	1004524
		24°	985lm	1004126	1925lm	1004222
2700K		36°	985lm	1004127	1935lm	1004223
		60°	980lm	1004128	1885lm	1004224
		24°	1020lm	1004134	1955lm	1004230
3000K		36°	1020lm	1004135	1970lm	1004231
		60°	1020lm	1004136	1880lm	1004232
		24°	1100lm	1004142	2125lm	1004238
4000K		36°	1100lm	1004143	2120lm	1004239
		60°	1100lm	1004144	2060lm	1004240
		24°	985lm	1004414	1925lm	1004510
2700K		36°	985lm	1004415	1935lm	1004511
		60°	980lm	1004416	1885lm	1004512
		24°	1020lm	1004422	1955lm	1004518
3000K		36°	1020lm	1004423	1970lm	1004519
		60°	1020lm	1004424	1880lm	1004520
		24°	1100lm	1004430	2125lm	1004526
4000K		36°	1100lm	1004431	2120lm	1004527
		60°	1100lm	1004432	2060lm	1004528



L 220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)

XL 220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)

	24°	2440lm	1004314	3290lm	1005687
	2700K	36°	2400lm	1004315	3250lm
		60°	2475lm	1004316	2980lm
		24°	2430lm	1004322	3530lm
	3000K	36°	2340lm	1004323	3490lm
		60°	2400lm	1004324	3210lm
		24°	2675lm	1004330	3800lm
	4000K	36°	2620lm	1004331	3760lm
		60°	2715lm	1004332	3460lm
		24°	2440lm	1004602	3290lm
	2700K	36°	2400lm	1004603	3250lm
		60°	2475lm	1004604	2980lm
		24°	2430lm	1004610	3530lm
	3000K	36°	2340lm	1004611	3490lm
		60°	2400lm	1004612	3210lm
		24°	2675lm	1004618	3800lm
	4000K	36°	2620lm	1004619	3760lm
		60°	2715lm	1004620	3460lm
		24°	2440lm	1004318	3290lm
	2700K	36°	2400lm	1004319	3250lm
		60°	2475lm	1004320	2980lm
		24°	2430lm	1004326	3530lm
	3000K	36°	2340lm	1004327	3490lm
		60°	2400lm	1004328	3210lm
		24°	2675lm	1004334	3800lm
	4000K	36°	2620lm	1004335	3760lm
		60°	2715lm	1004336	3460lm
		24°	2440lm	1004606	3290lm
	2700K	36°	2400lm	1004607	3250lm
		60°	2475lm	1004608	2980lm
		24°	2430lm	1004614	3530lm
	3000K	36°	2340lm	1004615	3490lm
		60°	2400lm	1004616	3210lm
		24°	2675lm	1004622	3800lm
	4000K	36°	2620lm	1004623	3760lm
		60°	2715lm	1004624	3460lm

NUMINOS® PD
1005787





NUMINOS® Pendant lights (PD)

LED
INSIDE



Decorative ring also
available in white




Discover the
NUMINOS®
Configurator
at slv.com



Decorative ring NUMINOS® S	Diameter: 6.2 cm, H: 2 cm	<input type="radio"/>	1006167
Decorative ring NUMINOS® M	Diameter: 8.2 cm, H: 2.4 cm	<input type="radio"/>	1006168
Decorative ring NUMINOS® L	Diameter: 9.65 cm, H: 2.5 cm	<input type="radio"/>	1006169
Decorative ring NUMINOS® XL	Diameter: 11.66 cm H: 2.85 cm	<input type="radio"/>	1006170

Detailed measurements and assembly information can be found on pages 118–119





S 220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

M 220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

		24°	985lm	1004146	1925lm	1004242
	2700K	36°	985lm	1004147	1935lm	1004243
		60°	980lm	1004148	1885lm	1004244
		24°	1020lm	1004154	1955lm	1004250
	3000K	36°	1020lm	1004155	1970lm	1004251
		60°	1020lm	1004156	1880lm	1004252
		24°	1100lm	1004162	2125lm	1004258
	4000K	36°	1100lm	1004163	2120lm	1004259
		60°	1100lm	1004164	2060lm	1004260
		24°	985lm	1004434	1925lm	1004530
	2700K	36°	985lm	1004435	1935lm	1004531
		60°	980lm	1004436	1885lm	1004532
		24°	1020lm	1004442	1955lm	1004538
	3000K	36°	1020lm	1004443	1970lm	1004539
		60°	1020lm	1004444	1880lm	1004540
		24°	1100lm	1004450	2125lm	1004546
	4000K	36°	1100lm	1004451	2120lm	1004547
		60°	1100lm	1004452	2060lm	1004548
		24°	985lm	1004150	1925lm	1004246
	2700K	36°	985lm	1004151	1935lm	1004247
		60°	980lm	1004152	1885lm	1004248
		24°	1020lm	1004158	1955lm	1004254
	3000K	36°	1020lm	1004159	1970lm	1004255
		60°	1020lm	1004160	1880lm	1004256
		24°	1100lm	1004166	2125lm	1004262
	4000K	36°	1100lm	1004167	2120lm	1004263
		60°	1100lm	1004168	2060lm	1004264
		24°	985lm	1004438	1925lm	1004534
	2700K	36°	985lm	1004439	1935lm	1004535
		60°	980lm	1004440	1885lm	1004536
		24°	1020lm	1004446	1955lm	1004542
	3000K	36°	1020lm	1004447	1970lm	1004543
		60°	1020lm	1004448	1880lm	1004544
		24°	1100lm	1004454	2125lm	1004550
	4000K	36°	1100lm	1004455	2120lm	1004551
		60°	1100lm	1004456	2060lm	1004552



L 220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)

XL 220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)

	24°	2440lm	1004338	3290lm	1005705
 C	2700K	36°	2400lm	1004339	3250lm
		60°	2475lm	1004340	2980lm
		24°	2430lm	1004346	3530lm
	3000K	36°	2340lm	1004347	3490lm
		60°	2400lm	1004348	3210lm
		24°	2675lm	1004354	3800lm
 Dali	4000K	36°	2620lm	1004355	3760lm
		60°	2715lm	1004356	3460lm
		24°	2440lm	1004626	3290lm
	2700K	36°	2400lm	1004627	3250lm
		60°	2475lm	1004628	2980lm
		24°	2430lm	1004634	3530lm
 C	3000K	36°	2340lm	1004635	3490lm
		60°	2400lm	1004636	3210lm
		24°	2675lm	1004642	3800lm
	4000K	36°	2620lm	1004643	3760lm
		60°	2715lm	1004644	3460lm
		24°	2440lm	1004342	3290lm
 Dali	2700K	36°	2400lm	1004343	3250lm
		60°	2475lm	1004344	2980lm
		24°	2430lm	1004350	3530lm
 C	3000K	36°	2340lm	1004351	3490lm
		60°	2400lm	1004352	3210lm
		24°	2675lm	1004358	3800lm
	4000K	36°	2620lm	1004359	3760lm
		60°	2715lm	1004360	3460lm
		24°	2440lm	1004630	3290lm
	2700K	36°	2400lm	1004631	3250lm
		60°	2475lm	1004632	2980lm
		24°	2430lm	1004638	3530lm
 C	3000K	36°	2340lm	1004639	3490lm
		60°	2400lm	1004640	3210lm
		24°	2675lm	1004646	3800lm
	4000K	36°	2620lm	1004647	3760lm
		60°	2715lm	1004648	3460lm

NUMINOS® 3-PH. TRACK
1004083



NUMINOS®
3-phase track system

LS
INSIDE



Discover NUMINOS®
lights for the
48V system on
pages 468–471



NUMINOS® 3-PH. TRACK
1004082



Decorative ring also available in white



Decorative ring NUMINOS® S	Diameter: 6.2 cm, H: 2 cm	<input type="radio"/>	1006167
Decorative ring NUMINOS® M	Diameter: 8.2 cm, H: 2.4 cm	<input type="radio"/>	1006168
Decorative ring NUMINOS® L	Diameter: 9.65 cm, H: 2.5 cm	<input type="radio"/>	1006169
Decorative ring NUMINOS® XL	Diameter: 11.66 cm H: 2.85 cm	<input type="radio"/>	1006170



Detailed measurements and assembly information can be found on pages 118–119



S 220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

M 220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

		24°	985lm	1004074	1925lm	1004170
C	2700K	36°	985lm	1004075	1935lm	1004171
		60°	980lm	1004076	1885lm	1004172
		24°	1020lm	1004082	1955lm	1004178
Dali	3000K	36°	1020lm	1004083	1970lm	1004179
		60°	1020lm	1004084	1880lm	1004180
		24°	1100lm	1004090	2125lm	1004186
C	4000K	36°	1100lm	1004091	2120lm	1004187
		60°	1100lm	1004092	2060lm	1004188
		24°	985lm	1004362	1925lm	1004458
Dali	2700K	36°	985lm	1004363	1935lm	1004459
		60°	980lm	1004364	1885lm	1004460
		24°	1020lm	1004370	1955lm	1004466
C	3000K	36°	1020lm	1004371	1970lm	1004467
		60°	1020lm	1004372	1880lm	1004468
		24°	1100lm	1004378	2125lm	1004474
Dali	4000K	36°	1100lm	1004379	2120lm	1004475
		60°	1100lm	1004380	2060lm	1004476
		24°	985lm	1004078	1925lm	1004174
C	2700K	36°	985lm	1004079	1935lm	1004175
		60°	980lm	1004080	1885lm	1004176
		24°	1020lm	1004086	1955lm	1004182
Dali	3000K	36°	1020lm	1004087	1970lm	1004183
		60°	1020lm	1004088	1880lm	1004184
		24°	1100lm	1004094	2125lm	1004190
C	4000K	36°	1100lm	1004095	2120lm	1004191
		60°	1100lm	1004096	2060lm	1004192
		24°	985lm	1004366	1925lm	1004462
Dali	2700K	36°	985lm	1004367	1935lm	1004463
		60°	980lm	1004368	1885lm	1004464
		24°	1020lm	1004374	1955lm	1004470
C	3000K	36°	1020lm	1004375	1970lm	1004471
		60°	1020lm	1004376	1880lm	1004472
		24°	1100lm	1004382	2125lm	1004478
Dali	4000K	36°	1100lm	1004383	2120lm	1004479
		60°	1100lm	1004384	2060lm	1004480



L 220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)

XL 220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)

	24°	2440lm	1004266	3290lm	1005723
 C	2700K	36°	2400lm	1004267	3250lm
		60°	2475lm	1004268	2980lm
		24°	2430lm	1004274	3530lm
	3000K	36°	2340lm	1004275	3490lm
		60°	2400lm	1004276	3210lm
		24°	2675lm	1004282	3800lm
 Dali	4000K	36°	2620lm	1004283	3760lm
		60°	2715lm	1004284	3460lm
		24°	2440lm	1004554	3290lm
	2700K	36°	2400lm	1004555	3250lm
		60°	2475lm	1004556	2980lm
		24°	2430lm	1004562	3530lm
 C	3000K	36°	2340lm	1004563	3490lm
		60°	2400lm	1004564	3210lm
		24°	2675lm	1004570	3800lm
	4000K	36°	2620lm	1004571	3760lm
		60°	2715lm	1004572	3460lm
		24°	2440lm	1004270	3290lm
 Dali	2700K	36°	2400lm	1004271	3250lm
		60°	2475lm	1004272	2980lm
		24°	2430lm	1004278	3530lm
	3000K	36°	2340lm	1004279	3490lm
		60°	2400lm	1004280	3210lm
		24°	2675lm	1004286	3800lm
 C	4000K	36°	2620lm	1004287	3760lm
		60°	2715lm	1004288	3460lm
		24°	2440lm	1004558	3290lm
	2700K	36°	2400lm	1004559	3250lm
		60°	2475lm	1004560	2980lm
		24°	2430lm	1004566	3530lm
 Dali	3000K	36°	2340lm	1004567	3490lm
		60°	2400lm	1004568	3210lm
		24°	2675lm	1004574	3800lm
	4000K	36°	2620lm	1004575	3760lm
		60°	2715lm	1004576	3460lm

NUMINOS® ZOOM
1006117

short. Smile while you still have time.





NUMINOS® ZOOM

3-phase track system



M 220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)



2700K	15°-60°	680-1650lm	1006108
3000K	15°-60°	750-1800lm	1006110
4000K	15°-60°	780-1900lm	1006112
2700K	15°-60°	680-1650lm	1006114
3000K	15°-60°	750-1800lm	1006116
4000K	15°-60°	780-1900lm	1006118
2700K	15°-60°	680-1650lm	1006109
3000K	15°-60°	750-1800lm	1006111
4000K	15°-60°	780-1900lm	1006113
2700K	15°-60°	680-1650lm	1006115
3000K	15°-60°	750-1800lm	1006117
4000K	15°-60°	780-1900lm	1006119



Half-peak divergence
adjustable from 15°-60°

Detailed measurements and assembly information can be found on pages 118–119

CONFIGURE YOUR NUMINOS®

SELECT YOUR

SYSTEM

COLOUR

NUMINOS® DL



NUMINOS® MOVE



NUMINOS® GIMBLE



black
black
white
chrome


black
white
white
chrome

NUMINOS® PROJECTOR



black
black
white
white
chrome
chrome

NUMINOS® PD



black white

NUMINOS® TRACK



black white

NUMINOS® ZOOM

The NUMINOS® lighting system offers constant lighting characteristics and modern design for all uses: hotels and offices to commercial and private spaces. From application to technology to detailed design: one great feature is that the modular downlights and spotlights can be configured exactly as required, depending on the design or space in question. The more multifaceted your project, the more you can benefit from the NUMINOS® lighting system.



Discover NUMINOS® lights for the 48V system on pages 468–471


SIZE	PERFORMANCE	DIFFUSERS
XS S M L XL	XS 200mA Power consumption: 7W S 250mA Power consumption: 8.6W M 500mA Power consumption: 17.5W L 700mA Power consumption: 25.4W XL 1050mA Power consumption: 37.4W	ELLIPTICAL Vertically distributed light, reduced glare, perfect for corridor use PRISMATIC Wide beam, low glare, perfect for lights at specific distances
XS S M L	XS 200 mA Power consumption: 7W S 250 mA Power consumption: 8.6W M 500 mA Power consumption: 17.5W L 700 mA Power consumption: 25.4W	FROSTED Wide beam, superior illumination, perfect for low ceilings HONEYCOMB Narrow beam, reduced glare, perfect for computer work
Matching drivers can be found on pages 94–95		
S M L XL	S 250mA Power consumption: 11W M 500mA Power consumption: 20W L 700mA Power consumption: 28W XL 900mA Power consumption: 36W	
S M L XL		

NUMINOS® Zoom only available in size M


NUMINOS® SIZES

DOWNLIGHTS


XS




Installation dimensions:
Diameter: 5.5 cm D: 11.0 cm



Installation dimensions:
Diameter: 6.8 cm D: 8 cm




Installation dimensions:
Diameter: 6.8 cm D: 8 cm




Installation dimensions:
Diameter: 6.8 cm D: 10 cm


S




Installation dimensions:
Diameter: 6.8 cm D: 5.5 cm



Installation dimensions:
Diameter: 9 cm D: 8.5 cm




Installation dimensions:
Diameter: 9 cm D: 7 cm




Installation dimensions:
Diameter: 8.8 cm D: 15 cm


M




Installation dimensions:
Diameter: 9 cm D: 7.5 cm



Installation dimensions:
Diameter: 12 cm D: 10 cm




Installation dimensions:
Diameter: 12 cm D: 10 cm




Installation dimensions:
Diameter: 10.5 cm D: 15 cm


L




Installation dimensions:
Diameter: 11.7 cm D: 9 cm



Installation dimensions:
Diameter: 14.5 cm D: 10.5 cm




Installation dimensions:
Diameter: 14.5 cm D: 11.5 cm




Installation dimensions:
Diameter: 13 cm D: 15 cm


XL



Installation dimensions:
Diameter: 14.5 cm D: 11.5 cm



Installation dimensions:
Diameter: 17.5 cm D: 13 cm




Installation dimensions:
Diameter: 17.5 cm D: 13.5 cm

**NUMINOS®
DL**













**NUMINOS®
MOVE**

**NUMINOS®
GIMBLE**

**NUMINOS®
PROJECTOR**

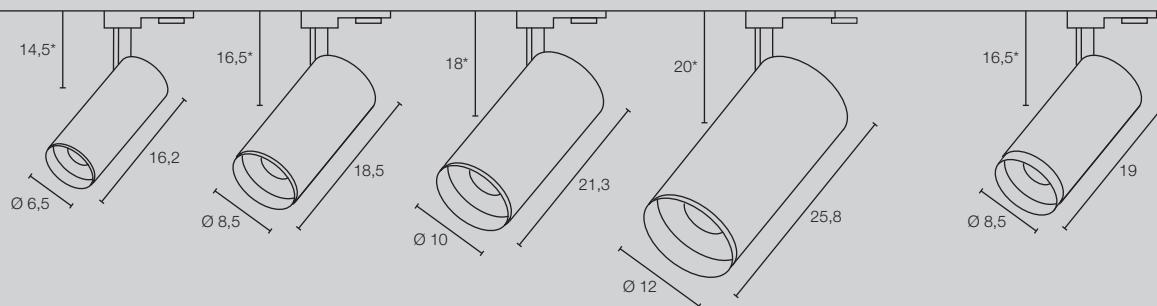S**M****L****XL****M****NUMINOS® TRACK**

*For angles less than 90°


NUMINOS® ZOOM**CEILING AND WALL LIGHTS****S****M****L****XL****NUMINOS® CL****NUMINOS® CW****NUMINOS® PD**

NUMINOS® DOWN-/SPOTLIGHTS




Discover the
NUMINOS®
Configurator
at slv.com


Available in seven versions
with high-performance LED
module in three light colours
and glare ratings.

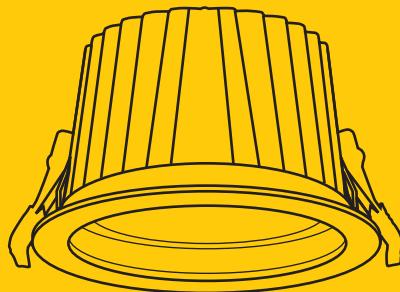

Selectable reflectors with
half beam angles of 20°-55°.

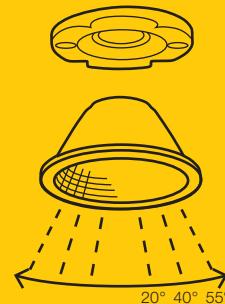

Various effect filters available
as accessories.

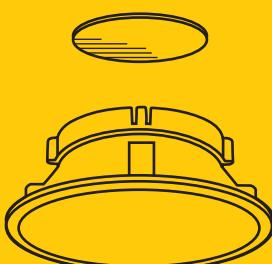


The decorative ring can be
selected as a visible border.

DL DOWNLIGHTS

NUMINOS® downlights are available as fixed or swivelling versions.

NUMINOS® ONE LIGHTING SYSTEM – A THOUSAND POSSIBILITIES. The freely configurable lighting system that casts a good light on every setting. No two projects are the same. However, many projects demand a coherent lighting and design concept. NUMINOS® is a perfectly coordinated lighting system that harmonises function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.

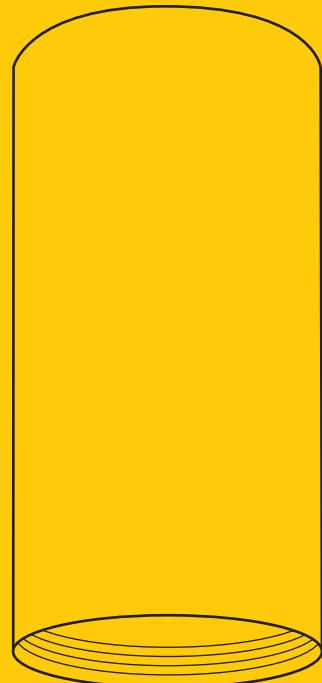

Available in three housing sizes with high-power LED module in three light colours.

Thanks to the built-in LED driver, all spotlights are suitable for direct connection to 230V mains voltage.



Choice of lenses with half beam angles of 24°-60°.



The decorative ring can be selected as a visible border.

SPOTLIGHTS

NUMINOS® spotlights are available as swivelling or fixed ceiling spots, pendant lights and as spots for 3-phase track systems.

NEW TRIA®
1007334



COMBINE



GU10 socket or LED module

+



Mounting ring available in black,
white, pink gold and aluminium

=



**NEW TRIA®**
Downlight (DL)**LED
INSIDE**

NEW



Modular Plug & Play system for maximum flexibility



Outstanding colour rendering index >90

IP65
version

Easy to install thanks to Quick Connector

**NEW TRIA® SETS**

You'll find out top selling combined sets on pages 132–139

LED MODULE FOR 68 AND 75 mm RING INSTALLATION DIAMETER

NEW

NEW TRIA® DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium



IP20 200mA 8,3W 2700K 705lm 1007381 ●

3000K 750lm 1007383 ●



NEW TRIA® DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium



IP20 200mA 8,3W 2700K 705lm 1007382 ●

3000K 750lm 1007384 ●



DIM-TO-WARM MODULE FOR 68 AND 75 mm RING INSTALLATION DIAMETER

NEW TRIA® DL, LED module, DTW, Phase



220-240V ~50/60Hz
Material: aluminium



IP20 250mA 11W 1800 - 3000K 700lm 1007421 ●



NEW TRIA® DL, LED module, DTW, Phase



220-240V ~50/60Hz
Material: aluminium



IP20 250mA 11W 1800 - 3000 K 700lm 1007422 ●



DIM-TO-WARM (DTW)

The dim-to-warm feature lets you adjust the colour temperature and brightness of the light. When dimmed, the light changes from a bright, cool-white colour to a warm colour.

All Watt measurements are based on the total wattage.

Detailed measurements and assembly information can be found on pages 128–129



MULTI WATTAGE 3 CCT MODULE FOR 68 AND 75 mm RING INSTALLATION DIAMETER

NEW TRIA® UNIVERSAL DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	100 - 180mA	4,6 - 8,6W	CCT 2500 / 3000 / 4000K	540 / 600 / 600lm	1007431	
--	------	-------------	------------	----------------------------	-------------------	---------	--



NEW TRIA® UNIVERSAL DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	100 - 180mA	4,6 - 8,6W	CCT 2500 / 3000 / 4000K	540 / 600 / 600lm	1007432	
--	------	-------------	------------	----------------------------	-------------------	---------	--



GU10 MODULE FOR 68 AND 75 mm RING INSTALLATION DIAMETER

GU10 LED CONNECTION BOX with base



220-240V ~50/60Hz
Material: aluminium

	-	IP20	-	<10W	-	-	1007283	
--	---	------	---	------	---	---	---------	--



Matching lamps can be found on page 860

LED MODULE FOR 95 mm RING INSTALLATION DIAMETER

NEW TRIA® DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium

		IP20	350mA	13,3W	2700K 3000K	1130lm 1200lm	1007409	
							1007410	



NEW TRIA® DL, LED module, Phase



220-240V ~50/60Hz
Material: aluminium

		IP20	350mA	13,3W	2700K 3000K	1130lm 1200lm	1007411	
							1007412	



NEW

CHOOSE A MOUNTING RING:



SUITABLE FOR ALL 68/75 INSTALLATION DIAMETER MODULE AND GU10 FITTING

	black		1007332	
NEW TRIA® 68 Round ring, GU10/LED module	white	IP20	1007333	
	pink gold		1007334	
	aluminium		1007335	
	black		1007329	
NEW TRIA® 68 Square ring, GU10/LED module	white	IP20	1007328	
	pink gold		1007331	
	aluminium		1007330	
NEW TRIA® 68 Round ring, GU10/LED module	black	IP20	1007451	
	white		1007453	
NEW TRIA® 68 Round ring, GU10/LED module	black	IP65	1007345	
	white		1007346	
NEW TRIA® 68 Square ring, GU10/LED module	black	IP65	1007347	
	white		1007348	
NEW TRIA® 68 Round ring, GU10/LED module with decorative glass cover	black	IP65	1007336	
	white		1007337	
NEW TRIA® 68 Square ring, GU10/LED module with decorative glass cover	black	IP65	1007338	
	white		1007339	
NEW TRIA® 75 Round ring, GU10/LED module	black		1007343	
	white	IP20	1007342	
	pink gold		1007344	
	aluminium		1007351	
NEW TRIA® 75 Square ring, GU10/LED module	black		1007340	
	white	IP20	1007349	
	pink gold		1007341	
	aluminium		1007350	
NEW TRIA® 75 Round ring, GU10/LED module Recessed with rim	black	IP20	1007449	
	white		1007450	
NEW TRIA® 75 Round ring, GU10/LED module Recessed	black	IP20	1007488	
	white		1007489	
NEW TRIA® 75 XL Round ring, GU10/LED module	black		1007631	
	white	IP20	1007630	
	pink gold		1007633	
	aluminium		1007632	
NEW TRIA® 75 XL Square ring, GU10/LED module	black		1007635	
	white	IP20	1007634	
	pink gold		1007637	
	aluminium		1007636	

SUITABLE FOR ALL 95 sets MODULE INSTALLATION DIAMETER

	black		1007444	
NEW TRIA® 95 Round ring, LED module	white	IP20	1007443	
	pink gold		1007447	
	aluminium		1007445	
NEW TRIA® 95 Round ring, LED module	black	IP20	1007452	
	white		1007454	
NEW TRIA® 95 Square ring, LED module	black	IP20	1007446	
	white		1007448	



With decorative
glass cover



30° pivot angle



30° rotation and
pivot angle



Recessed
with rim




Recessed




NEW TRIA® SIZES


LED MODULE FOR 68 and 75 mm RING INSTALLATION DIAMETER



1007381-384



1007421 - 422




1007431 - 432

NEW TRIA®
DL, LED MODULE, PHASE

NEW TRIA®
DL, LED MODULE, DTW, PHASE


NEW TRIA® UNIVERSAL
DL, LED MODULE, PHASE




1007283

GU10 LED CONNECTION BOX
WITH BASE


LED MODULE FOR 95 mm
RING INSTALLATION DIAMETER



1007409, 1007410 - 412

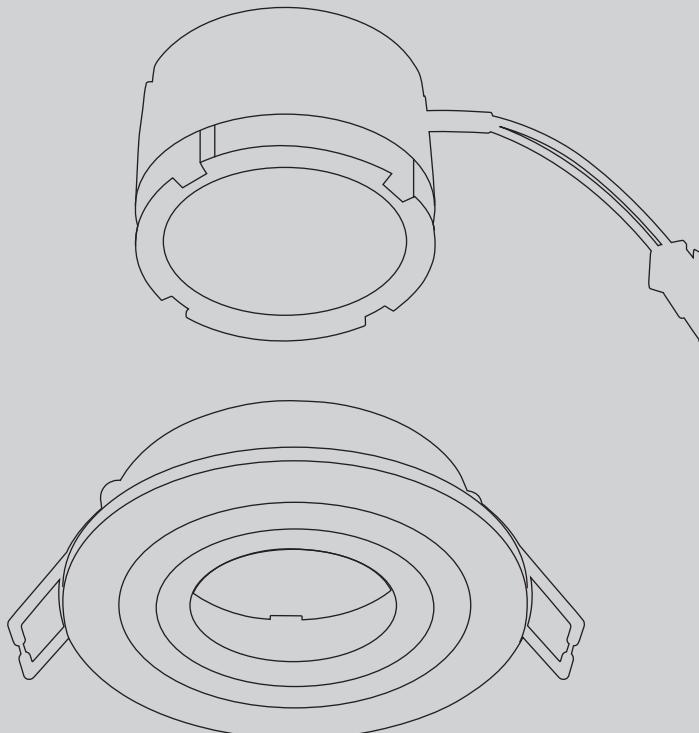

NEW TRIA®
DL, LED MODULE, PHASE




Installation dimensions:
Diameter: 6.8 cm
1007332 - 335

NEW TRIA® 68
ROUND RING, GU10/LED MODULE



Installation dimensions:
Diameter: 6.8 cm
1007328 - 331


NEW TRIA® 68
SQUARE RING, GU10/LED MODULE



Installation dimensions:
Diameter: 6.8 cm
1007451, 1007453


NEW TRIA® 68
ROUND RING, GU10/LED MODULE

IP65
version




Installation dimensions:
Diameter: 6.8 cm
1007345 - 346

NEW TRIA® 68
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 6.8 cm
1007347 - 348

NEW TRIA® 68
SQUARE RING, GU10/LED MODULE




Installation dimensions:
Diameter: 6.8 cm
1007336 - 337

NEW TRIA® 68
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 6.8 cm
1007338 - 339

NEW TRIA® 68
SQUARE RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007342 - 344, 1007351

NEW TRIA® 75
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007340 - 341, 1007349 - 350

NEW TRIA® 75
SQUARE RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007449 - 450

NEW TRIA® 75
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007488 - 489

NEW TRIA® 75
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007630 - 633

NEW TRIA® 75 XL
ROUND RING, GU10/LED MODULE




Installation dimensions:
Diameter: 7.5 cm
1007634 - 637

NEW TRIA® 75 XL
SQUARE RING, GU10/LED MODULE




Installation dimensions:
Diameter: 9.5 cm
1007443 - 445, 1007447

NEW TRIA® 95
RING, ROUND, LED MODULE



Installation dimensions:
Diameter: 9.5 cm
1007452, 1007454

NEW TRIA® 95
RING, ROUND, LED MODULE



Installation dimensions:
Diameter: 9.5 cm
1007446, 1007448

NEW TRIA® 95
RING, SQUARE, LED MODULE

CONFIGURE YOUR NEW TRIA®

More modularity for greater flexibility: with the latest NEW TRIA® downlights The series offers versatile design in a new light. Simply choose the right options and benefit from rapid installation.


CHOOSE YOUR PREFERRED MOUNTING RING ...

- ① Use *pivoting, rotating and pivoting, IP65
Diameter cutout of 68, 75 or 95 mm*
- ② Colour *black, white, pink gold or aluminium*
- ③ round or square

CHOOSE YOUR PREFERRED MODULE ...

- ① 68 / 75 or 95 mm
- ② Colour temperature *2700K or 3000K, 1800–3000K or CCT 2500 / 3000 / 4000K*
- ③ Beam angle *38° / 60°*

DONE!

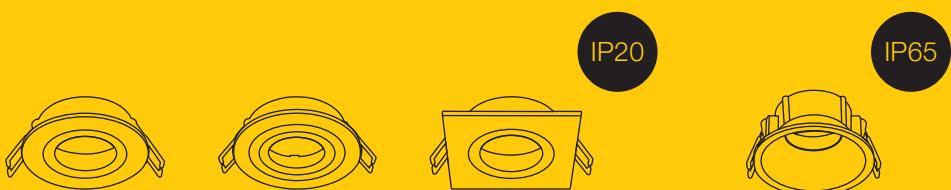

Mounting ring

IP20


IP65

Available as a pivoting, rotating and pivoting, or IP65 version
with 68, 75 or 95 mm installation diameter

Available in black, white, pink gold or aluminium

Available in round or square design

+

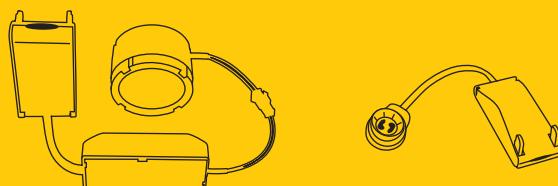

LED MODULE

GU10

NEW TRIA® 68

NEW TRIA® 75

NEW TRIA® 95



Colour temperature
2700 / 3000K, DTW 1800–3000K or multi



Beam angle
38° / 60°

NEW TRIA® 68
1007388





NEW TRIA® Downlight (DL)

**LED
INSIDE**

NEW

GU10
version



NEW TRIA® 68
DL, round, Phase



IP65
version



NEW TRIA® 75
DL, round, QPAR51

NEW TRIA® 68
DL, square, Phase



NEW TRIA® 75
DL, square, QPAR51



DTW
version



NEW TRIA® 68
DL, round, DTW, Phase

NEW TRIA® SETS

All NEW TRIA® Sets include perfectly matching components for fast and easy installation. Whether dim-to-warm, multi CCT or the GU10 version, you'll be optimally equipped with the NEW TRIA®.

NEW

COMPLETE SETS (MOUNTING RING + LED MODULE)

NEW TRIA® 68
DL, round, Phase220-240V ~50/60Hz
Material: aluminium

	IP20	200mA	8,3W	2700K	705lm	1007386
	IP20	200mA	8,3W	3000K	750lm	1007385

NEW TRIA® 68
DL, round, Phase220-240V ~50/60Hz
Material: aluminium

	IP20	200mA	8,3W	2700K	705lm	1007388
	IP20	200mA	8,3W	3000K	750lm	1007387
	IP20	200mA	8,3W	2700K	705lm	1007392
	IP20	200mA	8,3W	3000K	750lm	1007391

NEW TRIA® 68
DL, square, Phase220-240V ~50/60Hz
Material: aluminium

	IP20	200mA	8,3W	2700K	705lm	1007394
	IP20	200mA	8,3W	3000K	750lm	1007393

NEW TRIA® 68
DL, square, Phase220-240V ~50/60Hz
Material: aluminium

	IP20	200mA	8,3W	2700K	705lm	1007396
	IP20	200mA	8,3W	3000K	750lm	1007395
	IP20	200mA	8,3W	2700K	705lm	1007400
	IP20	200mA	8,3W	3000K	750lm	1007399



All Watt measurements are based on the total wattage.

Detailed measurements and assembly information can be found on pages 146–147



NEW TRIA® 68 DL, round, Phase



IP65
version

220-240V ~50/60Hz
Material: aluminium

	IP65	200mA	8,3W	2700K	460lm	1007406	
					530lm	1007405	
	IP65	200mA	8,3W	3000K	500lm	1007408	
					570lm	1007407	



DIM-TO-WARM

NEW

NEW TRIA® 68 DL, round, DTW, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	250mA	11W	1800 - 3000K	700lm	1007424	
						1007423	



NEW TRIA® 68 DL, round, DTW, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	250mA	11W	1800 - 3000K	700lm	1007426	
						1007425	



NEW TRIA® 68 DL, square, DTW, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	250mA	11W	1800 - 3000K	700lm	1007428	
						1007427	



NEW TRIA® 68 DL, square, DTW, Phase



220-240V ~50/60Hz
Material: aluminium

	IP20	250mA	11W	1800 - 3000K	700lm	1007430	
						1007429	



NEW

Multi CCT/Multi wattage

NEW TRIA® UNIVERSAL 68 DL, round, Phase



220-240V ~50/60Hz
Material: aluminium

IP20 100 - 180mA 4,6 - 8,6W CCT 2500 / 3000 / 4000K 540 / 600 / 600lm **1007434**
1007433



NEW TRIA® UNIVERSAL 68 DL, round, Phase



220-240V ~50/60Hz
Material: aluminium

IP20 100 - 180mA 4,6 - 8,6W CCT 2500 / 3000 / 4000K 540 / 600 / 600lm **1007436**
1007435



NEW TRIA® UNIVERSAL 68 DL, square, Phase



220-240V ~50/60Hz
Material: aluminium

IP20 100 - 180mA 4,6 - 8,6W CCT 2500 / 3000 / 4000K 540 / 600 / 600lm **1007438**
1007437





NEW TRIA® UNIVERSAL 68 DL, square, Phase




220-240V ~50/60Hz
Material: aluminium

		IP20	100 - 180mA	4,6 - 8,6W	CCT 2500 / 3000 / 4000K	540 / 600 / 600lm	1007440	
							1007439	



NEW TRIA® UNIVERSAL 68 DL, round, Phase



IP65
version

220-240V ~50/60Hz
Material: aluminium

		IP65	100 - 180mA	4,6 - 8,6W	CCT 2500 / 3000 / 4000K	370 / 410 / 410lm	1007442	
						430 / 470 / 470lm	1007441	



NEW TRIA® 75 DL, round, Phase



220-240V ~50/60Hz
Material: aluminium

		IP20	200mA	8,3W	2700K	705lm	1007402	
		IP20	200mA	8,3W	3000K	750lm	1007401	
							1007404	
							1007403	




All Watt measurements are based on the total wattage.

Detailed measurements and assembly information can be found on pages 146–147

Complete sets (mounting ring + GU10 version)

NEW

NEW TRIA® 68 DL, round, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10


1007369

1007368

1007370



NEW TRIA® 68 DL, square, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10


1007372

1007371

1007373



NEW TRIA® 75 DL, round, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10

1007375

1007374

1007376



NEW TRIA® 75 DL, square, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10

1007378

1007377

1007379





NEW TRIA® 75 XL DL, round, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10

1007625

1007624


1007626



NEW TRIA® 75 XL DL, square, QPAR51



220-240V ~50/60Hz
Material: aluminium



IP20

<10W

1xGU10

1007628

1007627

1007629



LED GU10
38°, EEEK=F, 6kWh/1000h



6W

2700K


450lm

51 mm

1005077



NEW TRIA®
113890

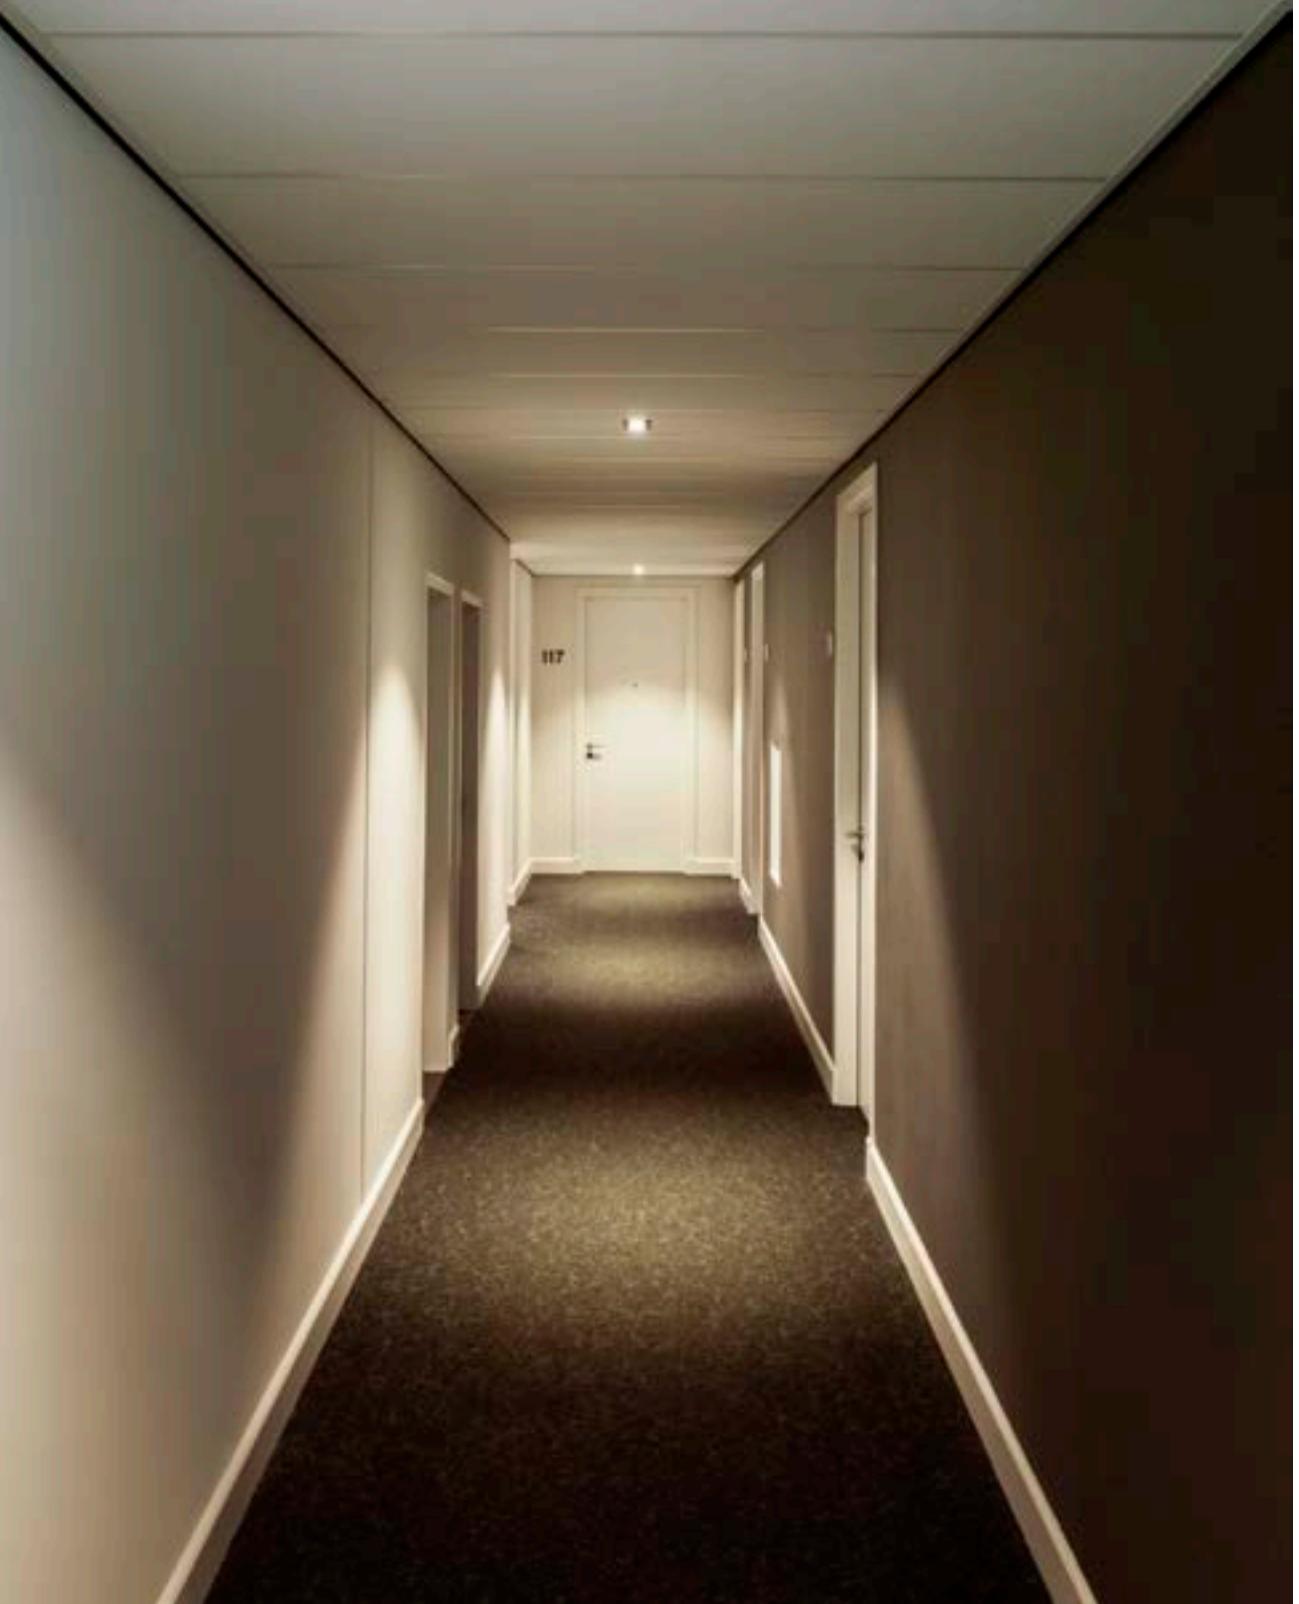



NEW TRIA® Downlight (DL)




NEW TRIA® 45
DL, round



NEW TRIA® 155
DL, Double



NEW TRIA® 45 DL, round



220-240V ~50/60Hz
Material: aluminium



-

700mA

3,4W

3000K

190lm


113970

113971

113976



NEW TRIA® 155 DL, Double



220-240V ~50/60Hz
Material: aluminium



-

350mA

14W

2700K

1160lm

113890

113891



Detailed measurements and assembly information can be found on pages 146–147

NEW TRIA®
113550





NEW TRIA® Downlight (DL)

SOCKET
INSIDE

NEW TRIA® 150
DL, round



NEW TRIA® 150
DL, square



NEW TRIA® 155
DL, Double



NEW TRIA® 300
DL, Double




NEW TRIA®
113840





NEW TRIA® 150 DL, round, QPAR111



220-240V ~50/60Hz
Material: aluminium




IP20

<75W

1xGU10

113550
113540


NEW TRIA® 150 DL, square, QPAR111



220-240V ~50/60Hz
Material: aluminium




IP20

<75W

1xGU10

113830
113541


NEW TRIA® 155 DL, Double, QPAR51



220-240V ~50/60Hz
Material: aluminium




IP20

<50W

2xGU10

113492
113512
111362


NEW TRIA® 300 DL, Double, QPAR111



220-240V ~50/60Hz
Material: aluminium



IP20

<75W

2xGU10

113840
113841
111382


LED GU10
38°, EER=F, 6kWh/1000h
For NEW TRIA® 155



6W

2700K

450lm

51 mm

1005077

QPAR111
38°, EER=F, 8kWh/1000h
For NEW TRIA® 150/300



8W

2700K

680lm

1005274

LED GU10
40°, EER=G, 8kWh/1000h
For NEW TRIA® 150/300



7,3W

2700K

500lm

111 mm

1005294

QPAR111
30°, EER=F, 13kWh/1000h
For NEW TRIA® 150/300



12,5W

2700K

950lm


1005276

NEW TRIA® SIZES




Installation dimensions:
Diameter: 6.8 cm D: 4 cm

NEW TRIA® 68
DL, ROUND, PHASE




Installation dimensions:
Diameter: 6.8 cm D: 4 cm

NEW TRIA® 68
DL, SQUARE, PHASE




Installation dimensions:
Diameter: 6.8 cm D: 6 cm

IP65
version




Installation dimensions:
Diameter: 6.8 cm D: 6.5 cm

NEW TRIA® 68
DL, ROUND, QPAR51




Installation dimensions:
Diameter: 6.8 cm D: 6.5 cm

NEW TRIA® 68
DL, SQUARE, QPAR51




Installation dimensions:
Diameter: 6.8 cm D: 4.5 cm

NEW TRIA® 68
DL, ROUND, DTW, PHASE




Installation dimensions:
Diameter: 6.8 cm D: 4.5 cm

NEW TRIA® 68
DL, SQUARE, DTW, PHASE




Installation dimensions:
Diameter: 6.8 cm D: 4 cm

NEW TRIA® UNIVERSAL 68
DL, ROUND, PHASE



Installation dimensions:
Diameter: 6.8 cm D: 4 cm

NEW TRIA® UNIVERSAL 68
DL, SQUARE, PHASE




Installation dimensions:
Diameter: 6.8 cm D: 5.5 cm

IP65
version


NEW TRIA® UNIVERSAL 68
DL, ROUND, PHASE



Installation dimensions:
Diameter: 7.5 cm T: 4 cm



Installation dimensions:
Diameter: 7.5 cm D: 6.5 cm




Installation dimensions:
Diameter: 7.5 cm D: 6.5 cm

NEW TRIA® 75 DL, ROUND, PHASE

NEW TRIA® 75 DL, ROUND, QPAR51

NEW TRIA® 75 DL, SQUARE, QPAR51




Installation dimensions:
Diameter: 7.5 cm D: 6.5 cm




Installation dimensions:
Diameter: 7.5 cm D: 6.5 cm

NEW TRIA® 75 XL DL, ROUND, QPAR51


NEW TRIA® 75 XL DL, SQUARE, QPAR51



Installation dimensions:
Diameter: 4.5 cm D: 4 cm



Installation dimensions:
Diameter: 15 cm D: 12.5 cm




Installation dimensions:
Diameter: 15 cm D: 12.5 cm


NEW TRIA® 45 DL, ROUND

NEW TRIA® 150 DL, ROUND, QPAR111


NEW TRIA® 150 DL, SQUARE, QPAR111



Installation dimensions:
L: 15.5, W: 8 cm D: 4 cm

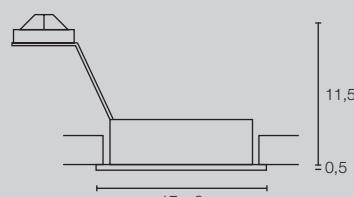

Installation dimensions:
L: 15 cm, W: 7.8 cm, D: 12.5 cm

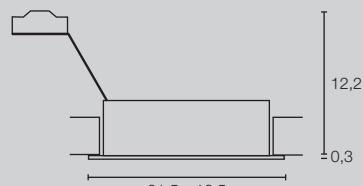


Installation dimensions:
L: 30 cm, W: 15.5 cm, D: 12.5 cm

NEW TRIA® 155 DL, DOUBLE

NEW TRIA® 155 DL, DOUBLE, QPAR51

NEW TRIA® 300 DL, DOUBLE, QPAR111

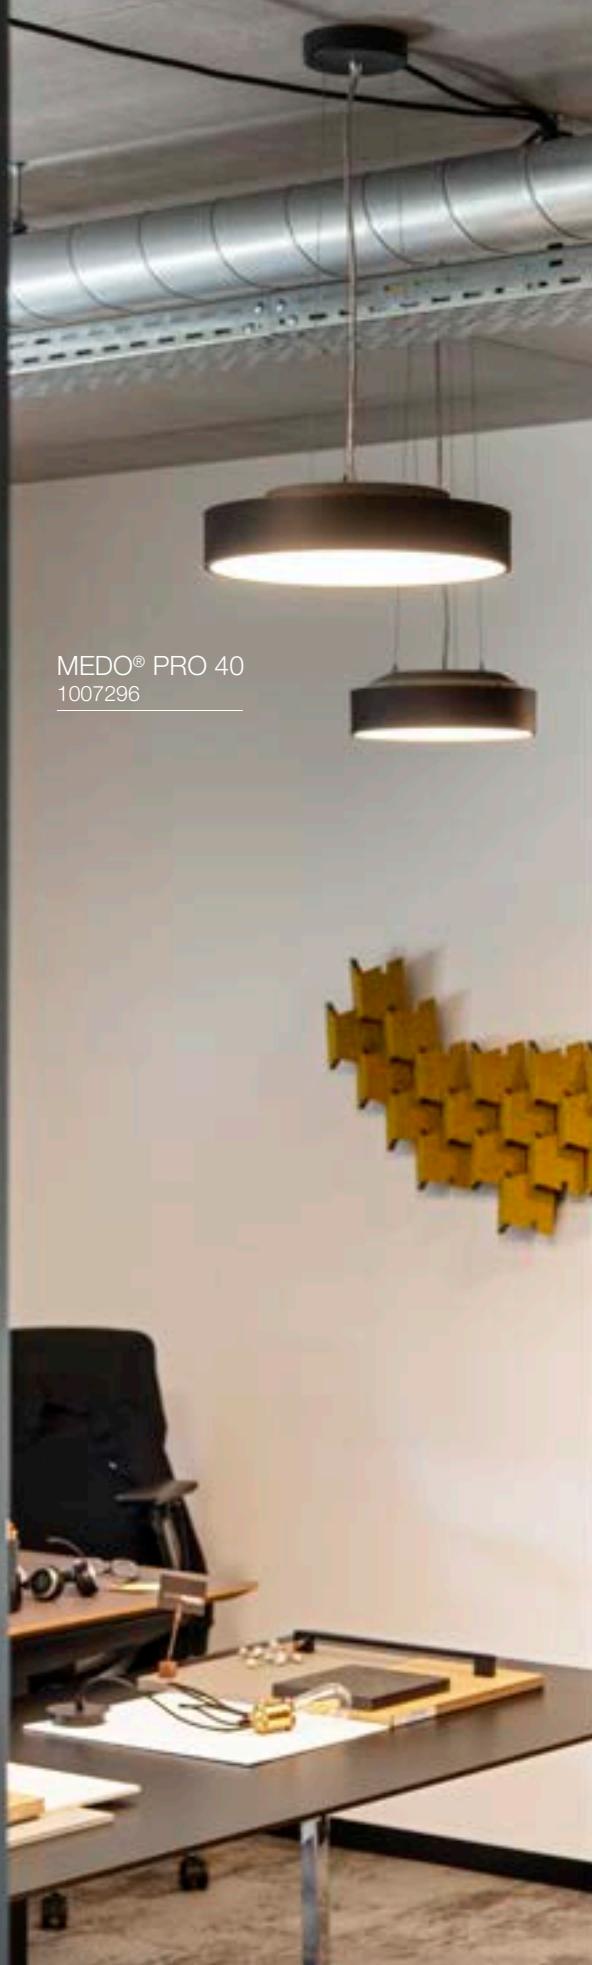

MEDO® PRO 40
1007296

Discover the entire
MEDO® family



MEDO® PRO CW



MEDO® PRO (DC) CW



MEDO® CW



MEDO® CL



MEDO® RING PD



MEDO® EL



MEDO® PRO
Wall and ceiling lights (CW)

NEW




Suspension kit not included

Also available in prismatic
design and particularly glare-free
with UGR<19

Outstanding colour rendering
index CRI>90

Colour temperature selection via
CCT switch (3000/4000K)

The transparent rear diffuses
light more indirectly



ATMOSPHERIC LIGHTING


The new MEDO® options let the background radiate too thanks to their indirect light dispersion. This creates a pleasant, even and glare-free lighting in your rooms.

PRISMATIC DESIGN (UGR<19)

MEDO® PRO 30 CW, DALI, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 250mA 10W CCT 3000 / 4000K

1250 / 1250lm

1007284 ●
1007285 ●



MEDO® PRO 30 CW, Phase, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 250mA 10W CCT 3000 / 4000K

1250 / 1250lm


1007288 ●
1007289 ●



MEDO® PRO 40 CW, DALI, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 500mA 19W CCT 3000 / 4000K

2400 / 2500lm

1007292 ●
1007293 ●



MEDO® PRO 40 CW, Phase, UGR<19



220-240 V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 500mA 19W CCT 3000 / 4000K

2400 / 2500lm

1007296 ●
1007297 ●





MEDO® PRO 60
CW, DALI, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 39W CCT 3000 / 4000K

5000 / 5100lm

1007300
1007301



MEDO® PRO 60
CW, Phase, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 37W CCT 3000 / 4000K

5000 / 5100lm


1007304
1007305



MEDO® PRO 90
CL, DALI, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 75W CCT 3000 / 4000K

9400 / 9700lm


1007308
1007309



MEDO® PRO 90
CL, Phase, UGR<19



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 74W CCT 3000 / 4000K

9400 / 9700lm

1007312
1007313




Outstanding
energy efficiency

OPAL DESIGN (UGR<25)

MEDO® PRO 30 CW, DALI



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

250mA

10W

CCT 3000 / 4000K

1350 / 1350lm


1007286
1007287



MEDO® PRO 30 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

250mA

10W

CCT 3000 / 4000K

1350 / 1350lm

1007290
1007291



MEDO® PRO 40 CW, DALI



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

500mA

19W

CCT 3000 / 4000K

2650 / 2650lm

1007294
1007295



MEDO® PRO 40 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

500mA

19W

CCT 3000 / 4000K

2650 / 2650lm

1007298
1007299



Outstanding
energy efficiency



MEDO® PRO 60 CW, DALI



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 39W

CCT 3000 / 4000K

5450 / 5500lm


1007302
1007303



MEDO® PRO 60 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 37W

CCT 3000 / 4000K

5450 / 5500lm

1007306
1007307



MEDO® PRO 90 CL, DALI



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 75W

CCT 3000 / 4000K

11000 / 11200lm

1007310
1007311



MEDO® PRO 90 CL, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 74W

CCT 3000 / 4000K


11000 / 11200lm

1007314
1007315



	black	135250
Suspension kit 1.5 m	white	135251
	grey	135254
	black	1001952
Suspension kit 5 m	white	1001950
	grey	1001951

MEDO® PRO 60
1006417 (DC)

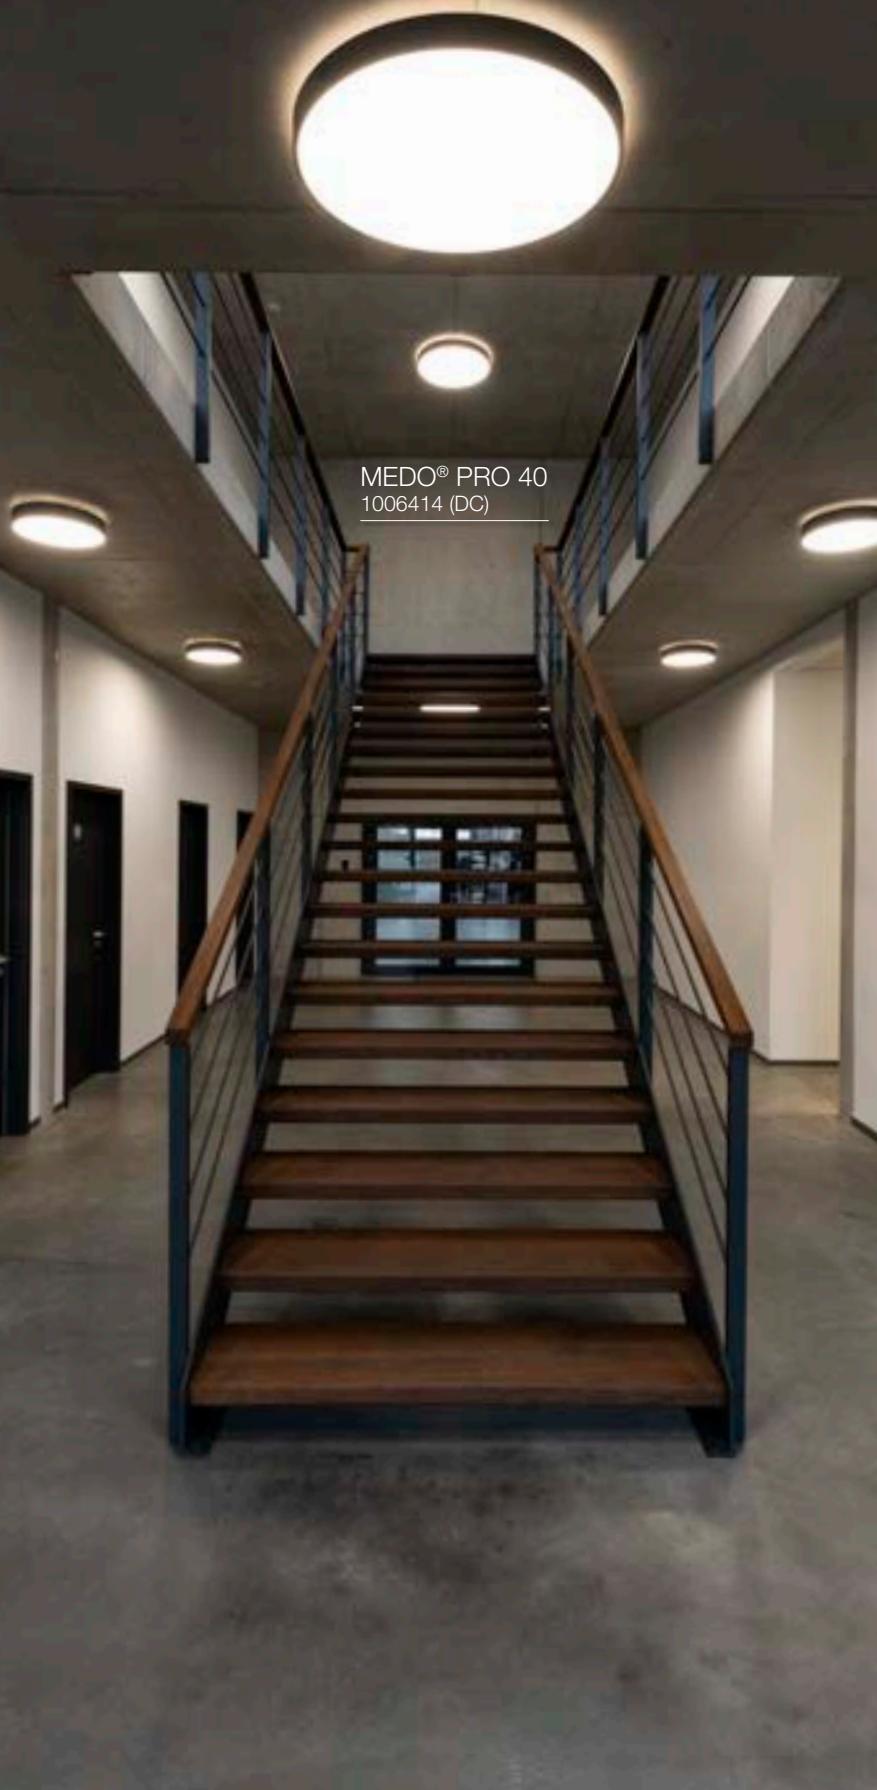

MEDO® PRO 40
1006414 (DC)



ATMOSPHERIC LIGHTING

The new MEDO® options let the background radiate too thanks to their indirect light dispersion. This creates a pleasant, even and glare-free lighting in your rooms.



MEDO® PRO Wall and ceiling lights (CW), DC

LED
INSIDE

NEW

Suspension kit not included



Easy and fast
to install thanks
to EasyBase




With prismatic design
and particularly glare-free
with UGR<19

The transparent rear
diffuses light
more indirectly

Outstanding colour
rendering index CRI>90

EMERGENCY LIGHTING

MEDO PRO DC® lets you benefit from all the technical advantages of the prismatic MEDO® PRO version with UGR<19. Thanks to the integrated, DC-compatible driver, you can rest assured that your lights will still function and guide the way during a power outage.

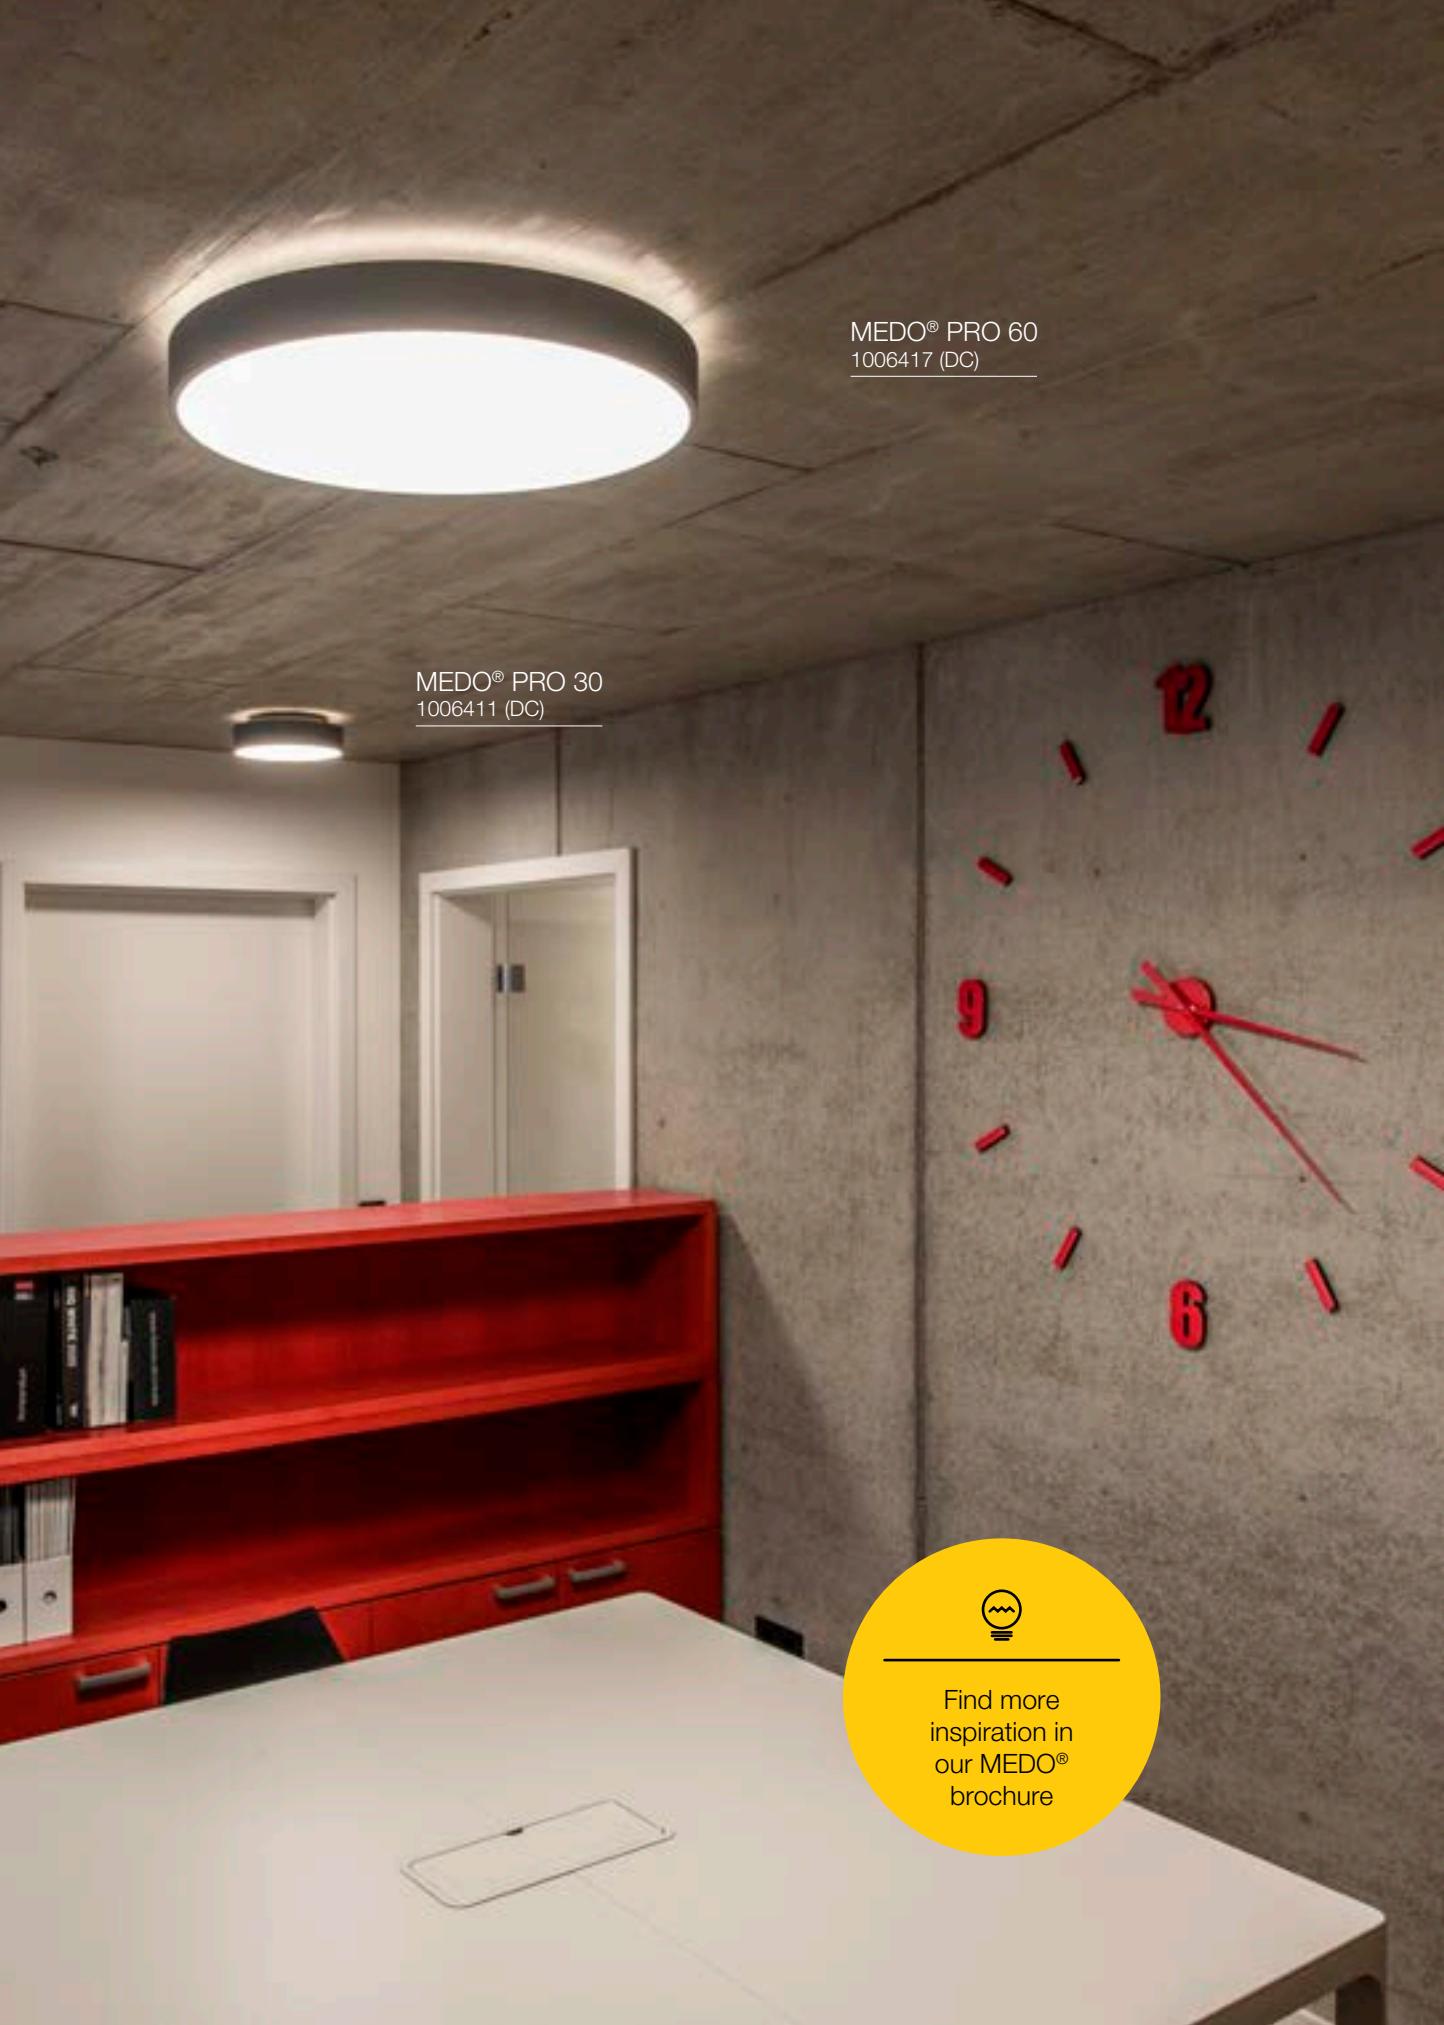

MEDO® PRO 60
1006417 (DC)

MEDO® PRO 30
1006411 (DC)



Find more
inspiration in
our MEDO®
brochure



MEDO® PRO 30 CW, DALI, UGR<19, DC



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

250mA

10W

CCT 3000 / 4000K

1250 / 1250lm

1006411

1006412

MEDO® PRO 40 CW, DALI, UGR<19, DC



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

500mA

19W

CCT 3000 / 4000K

2400 / 2500lm

1006414

1006415

MEDO® PRO 60 CW, DALI, UGR<19, DC



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

1000mA

37W

CCT 3000 / 4000K

5000 / 5100lm

1006417

1006418

MEDO® PRO 90 CL, DALI, UGR<19, DC



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50

1000mA

75W

CCT 3000 / 4000K

9400 / 9700lm

1006420

1006421

Outstanding
energy efficiency



	black	135250
Suspension kit 1.5 m	white	135251
	grey	135254
Suspension kit 5m	black	1001952
	white	1001950
	grey	1001951

MEDO® 60
1007322

MEDO® 90
1007325



ATMOSPHERIC LIGHTING

The new MEDO® options let the background radiate too thanks to their indirect light dispersion. This creates a pleasant, even and glare-free lighting in your rooms.



MEDO®
Wall and ceiling lights (CW)

NEW



Suspension kit not included



Easy and fast
to install thanks to
EasyBase

Outstanding colour
rendering index CRI>90

Colour temperature
selection via CCT switch
(2700/3000/4000K)

The transparent
rear diffuses light
more indirectly



MEDO® 30
1007317





MEDO® 30 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 250mA 12W CCT 2700 / 3000 / 4000K 1050 / 1100 / 1200lm

1007316 ●
1007317 ●
1007318 ●



MEDO® 40 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 500mA 20W CCT 2700 / 3000 / 4000K 2100 / 2200 / 2350lm

1007319 ●
1007320 ●
1007321 ●



MEDO® 60 CW, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 39W CCT 2700 / 3000 / 4000K 4050 / 4250 / 4550lm

1007322 ●
1007323 ●
1007324 ●



MEDO® 90 CL, Phase



220-240V ~50/60Hz
Material: aluminium/polystyrene (PS)



IP50 1000mA 79W CCT 2700 / 3000 / 4000K 8300 / 8700 / 9350lm

1007325 ●
1007326 ●
1007327 ●



	black	135250
Suspension kit 1.5 m	white	135251
	grey	135254
	black	1001952
Suspension kit 5 m	white	1001950
	grey	1001951


Detailed measurements and assembly information can be found on pages 174 – 175

MEDO®: HOW TO INSTALL


The new MEDO® versions are all easy and quick to install thanks to our EasyBase. Use the EasyBase directly as a template for your drill holes and wire it straight after fixing in place. Next, simply select the colour temperature using the CCT switch on the light, look for the green markings and easily click the light into place.

CEILING LIGHTS

Screw EasyBase to the ceiling




Wire EasyBase



Select the colour temperature using the CCT switch on the light, look for the green markings

MEDO® 60 and MEDO® 90 are also attached using the safety chain provided

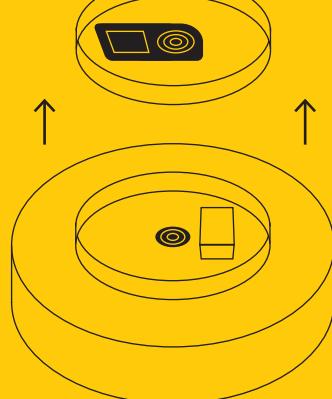


Easy and fast
to install thanks to
EasyBase

RECESSED LIGHTS FRAMELESS


Place recessed fixing kit in the ceiling



RECESSED LIGHTS MOUNTING FRAME





Position and secure mounting plates

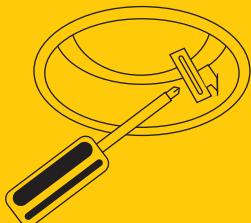



Screw mounting plate to the ceiling
and fill in the ceiling




Connect LED driver



Insert LED module and select colour
temperature via the CCT switch



Replace cover



MEDO® 60
1002882





MEDO® Ceiling lights (CL)



Suspension kit not included



MEDO® 60 CL, Square, 1-10V



220-240V ~50/60Hz
Material: aluminium/acrylic



IP20

1000mA

39W

3000K

3800lm

1000726

MEDO® 60 CL, Square, DALI



220-240V ~50/60Hz
Material: aluminium/acrylic



IP20

1000mA

39W


3000K

3800lm


1002882

Suspension kit 1.5 m	black	135250
	white	135251
	grey	135254
Suspension kit 5 m	black	1001952
	white	1001950
	grey	1001951

Detailed measurements and assembly information can be found on pages 174–175

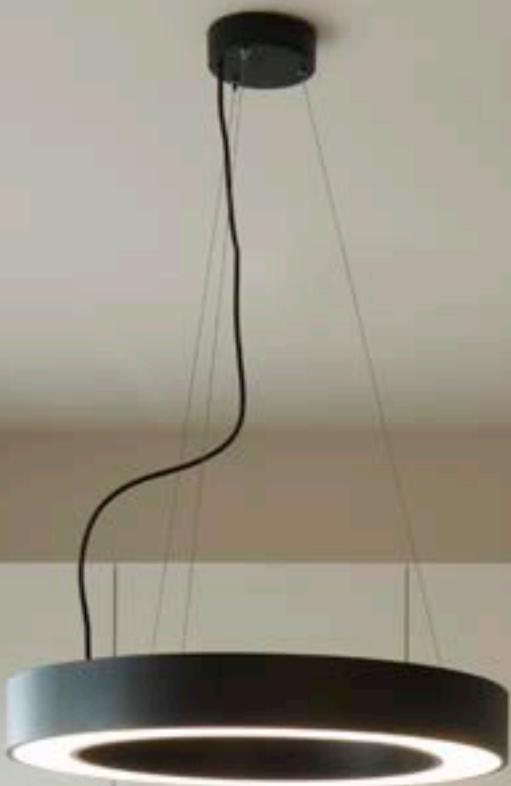

MEDO® RING 60
133840

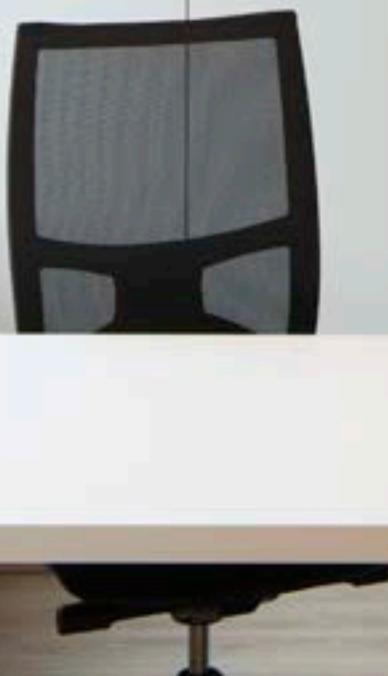




MEDO® RING Pendant lights (PD)



MEDO® RING
in sizes 60 and 90

MEDO® RING 60 PD, 1-10V



220-240V ~50/60Hz
Material: aluminium/polymethylacrylate (PMMA)



IP20

700mA

33W


3000K

2200lm

133840
133841



MEDO® RING 90 PD, 1-10V



220-240V ~50/60Hz
Material: aluminium/polymethylacrylate (PMMA)



IP20

1200mA

56W

3000K

4900lm

133850
133851



MEDO® RING 60 PD, DALI



220-240V ~50/60Hz
Material: aluminium/polymethylacrylate (PMMA)



IP20

700mA

34W

3000K

2200lm

1002890
1002891



MEDO® 60
1001907







MEDO®
Recessed lights (EL)



MEDO® 30, 40 and 60
RL, frameless




MEDO® 30, 40 and 60
RL, mounting frame

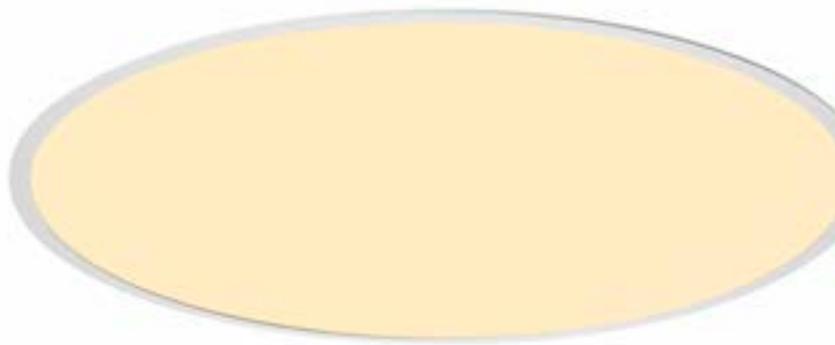

FRAMELESS

MEDO® 30 EL, Frameless




Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 350mA 14W CCT 3000 / 4000K 1500 / 1600lm 1001901



MEDO® 40 EL, Frameless



Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 700mA 28W CCT 3000 / 4000K 3100 / 3300lm 1001902



MEDO® 60 EL, Frameless



Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 1000 / 1050mA 36W CCT 3000 / 4000K 4700 / 5000lm 1001903




LED drivers are not included and
must be ordered separately.
You can find suitable drivers here:





MOUNTING FRAME

MEDO® 30 EL, Mounting frame




Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 350mA 14W CCT 3000 / 4000K 1500 / 1600lm **1001905**



MEDO® 40 EL, Mounting frame




Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 700mA 28W CCT 3000 / 4000K 3100 / 3300lm **1001906**



MEDO® 60 EL, Mounting frame



Material: aluminium/polymethylacrylate (PMMA)

○ - IP20 1000 / 1050mA 38W CCT 3000 / 4000K 4700 / 5000lm **1001907**



LED DRIVER



LED DRIVER
250-700mA, 1-10V / DALI
INCLUDING STRAIN RELIEF
MEDO® 30 + 60

white 20W 1-10V / DALI

L: 15 cm, W: 5.2 cm, H: 2.8 cm **1002423**

LED DRIVER
500-1050mA, 1-10V / DALI
INCLUDING STRAIN RELIEF
MEDO® 40

white 40W 1-10V / DALI

L: 14.2 cm, W: 4.4 cm, H: 3 cm **1002424**

LED DRIVER
700mA
INCLUDING STRAIN RELIEF
MEDO® 40

white 40W C -

L: 14.5 cm, W: 4 cm, H: 3 cm **1005446**

LED DRIVER
1050mA
INCLUDING STRAIN RELIEF
MEDO® 30 + 60

white 40W C

L: 16.6 cm W: 5.2 cm H: 2.4 cm **464804**

LED DRIVER
700 / 900 / 1000mA
INCLUDING STRAIN RELIEF
MEDO® 30 + 40 + 60

white 40W -



L: 12.3 cm, W: 7.9 cm, H: 3 cm **1006120**

MEDO® OVERVIEW



	MEDO® PRO CW	MEDO® PRO (DC) CW	MEDO® CW
Sizes	30 40 60 90	30 40 60 90	30 40 60 90
Suspension kit	1.5 5 m (not included)	1.5 5 m (not included)	1.5 5 m (not included)
EasyBase	✓	✓	✓
CCT switch	✓	✓	✓
DALI	✓	✓	-
Phase	C	-	C
1-10V	-	-	-
UGR	19 25	19	22 25
DC	-	✓	-

LED drivers are not included
and must be ordered separately



MEDO®
CL, SQUARE

60

1.5 | 5 m (not included)

-

-

✓

-

✓

22

MEDO® RING
PD

60

1.5 m (included)

-

-

✓

-

✓

22

MEDO®
EL, FRAMELESS | MOUNTING FRAME

30 | 40 | 60

-

-

✓

✓ *

✓ *

✓ *


25

-


-

MEDO® SIZES


RECESSED LIGHTS



Installation dimensions:
Diameter: 29 cm D: 13 cm



Installation dimensions:
Diameter: 39 cm D: 13 cm




Installation dimensions:
Diameter: 61 cm D: 16 cm


MEDO® 30
EL, FRAMELESS

MEDO® 40
EL, FRAMELESS

MEDO® 60
EL, FRAMELESS



Installation dimensions:
Diameter: 29 cm D: 13 cm



Installation dimensions:
Diameter: 39 cm D: 13 cm




Installation dimensions:
Diameter: 61 cm D: 16 cm

MEDO® 30
EL, MOUNTING FRAME

MEDO® 40
EL, MOUNTING FRAME


MEDO® 60
EL, MOUNTING FRAME

CEILING LIGHT




MEDO® 60
CL, SQUARE

PENDANT LIGHTS

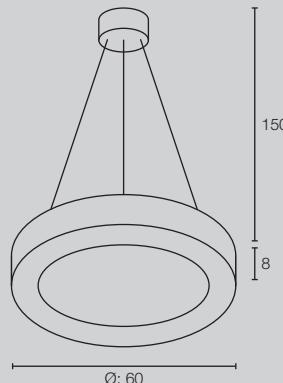

MEDO® RING 60
PD

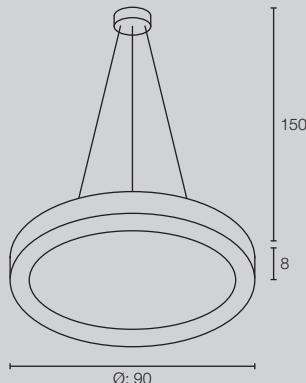


MEDO® RING 90
PD




All ceiling lights
can also be used as
pendant lights


WALL AND CEILING LIGHTS




MEDO® PRO 30
CW, DC




MEDO® PRO 40
CW, DC




MEDO® PRO 60
CW, DC




MEDO® PRO 90
CL, DC




MEDO® PRO 30
CW




MEDO® PRO 40
CW




MEDO® PRO 60
CW




MEDO® PRO 90
CL




MEDO® 30
CW



MEDO® 40
CW



MEDO® 60
CW



MEDO® 90
CL

LALU®
1007550






LALU®
Pendant lights (PD)



NEW

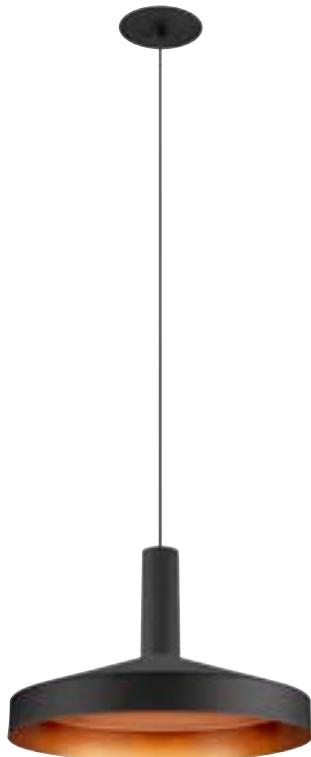


Combine the colours and shapes
of the LALU® Pendant lights

LALU®
PD, LED Base, Phase



220-240V ~50/60Hz
Material: aluminium/steel



IP20 500mA 9,5W 3000K 680lm


1007518 ●
1007519 ●
1007520 ●



LALU®
PD, LED Base, Phase, Recessed



220-240V ~50/60Hz
Material: aluminium/steel



IP20 500mA 9,5W 3000K 680lm

1007548 ●
1007549 ●
1007550 ●



CHOOSE MATCHING LAMPSHADES

MIX
match



	black/antique bronze		1007523	
LALU® TETRA 14	white/gold	IP20	Diameter: 14 cm, H: 4.9 cm	1007522
	antique bronze			1007521
	black/antique bronze		1007526	
LALU® TETRA 24	white/gold	IP20	Diameter: 24 cm, H: 6.7 cm	1007525
	antique bronze			1007524
	black/antique bronze		1007529	
LALU® TETRA 36	white/gold	IP20	Diameter: 36 cm, H: 8.9 cm	1007528
	antique bronze			1007527
	black/antique bronze		1007532	
LALU® CONE 15	white/gold	-	Diameter: 15.2 cm, H 17 cm	1007531
	antique bronze			1007530
	black/antique bronze		1007535	
LALU® ELYPSE 15	white/gold	-	Diameter: 15 cm, H 1.4 cm	1007534
	antique bronze			1007533
	black/antique bronze		1007538	
LALU® ELYPSE 22	white/gold	-	Diameter: 22 cm, H 2.8 cm	1007537
	antique bronze			1007536
	black/antique bronze		1007541	
LALU® ELYPSE 33	white/gold	-	Diameter: 3.5 cm L: 8 cm	1007540
	antique bronze			1007539
	black/antique bronze		1007544	
LALU® PLATE 15	white/gold	-	Diameter: 15 cm, H 1.5 cm	1007543
	antique bronze			1007542
	black/antique bronze		1007547	
LALU® PLATE 22	white/gold	-	Diameter: 22 cm, H 1.5 cm	1007546
	antique bronze			1007545





MIX & MATCH

LALU®

LALU® TETRA 14

black	1007523
white	1007522
antique bronze	1007521



LALU® CONE 15

black	1007532
white	1007531
antique bronze	1007530



LALU® TETRA 24

black	1007526
white	1007525
antique bronze	1007524



LALU® TETRA 36

black	1007529
white	1007528
antique bronze	1007527



LALU®

PD, LED BASE, PHASE

black	1007518
white	1007519
antique bronze	1007520



LALU®

PD, LED BASE, PHASE, RECESSED

black	1007548
white	1007549
antique bronze	1007550



LALU® ELYPSE 15

black	1007535
white	1007534
antique bronze	1007533



LALU® ELYPSE 22

black	1007538
white	1007537
antique bronze	1007536




LALU® ELYPSE 33

black	1007541
white	1007540
antique bronze	1007539



LALU® PLATE 15

black	1007544
white	1007543
antique bronze	1007542



LALU® PLATE 22

black	1007547
white	1007546
antique bronze	1007545



LALU®

PD, LED BASE, 48V, DALI

black	1007749
white	1007748
antique bronze	1007747



Mix and match products in the LALU® family to suit your taste.
Perfectly coordinated, you can mix and match the shapes, sizes and
colours or create a setup with multiple lights. Get creative – You can
recognise SLV Mix & Match products by the following symbol:



MIX
match



LALU®
1007658



LALU®
Pendant light (PD)

NEW

**SOCKET
INSIDE**

LALU®
PD, E27



220-240V ~50/60Hz
Material: aluminium



IP20

10W

1xE27

1007658



LALU®
Shade, E27 Base

black/antique bronze
antique bronze

Diameter: 33 cm H: 3.5 cm

1007659
1007660

A60
180°, EEE=F, 8kWh/1000h



7,5W

2700K

720lm

1005305


LALU® SIZES

PENDANT LIGHTS

MIX
match



LALU® TETRA 14
PD, SHADE




LALU® CONE 15
PD, SHADE



LALU® ELYPSE 15
PD, SHADE



LALU® PLATE 15
PD, SHADE



LALU® TETRA 24
PD, SHADE



LALU® ELYPSE 22
PD, SHADE




LALU® PLATE 22
PD, SHADE



LALU® TETRA 36
PD, SHADE




LALU® ELYPSE 33
PD, SHADE




LALU®
PD, LED BASE, PHASE

Installation dimensions:
Diameter: 6.8 cm D: 5 cm

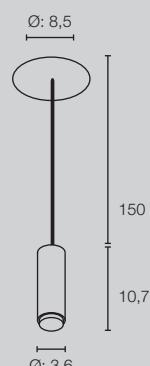


LALU®
PD, LED BASE, PHASE, RECESSED

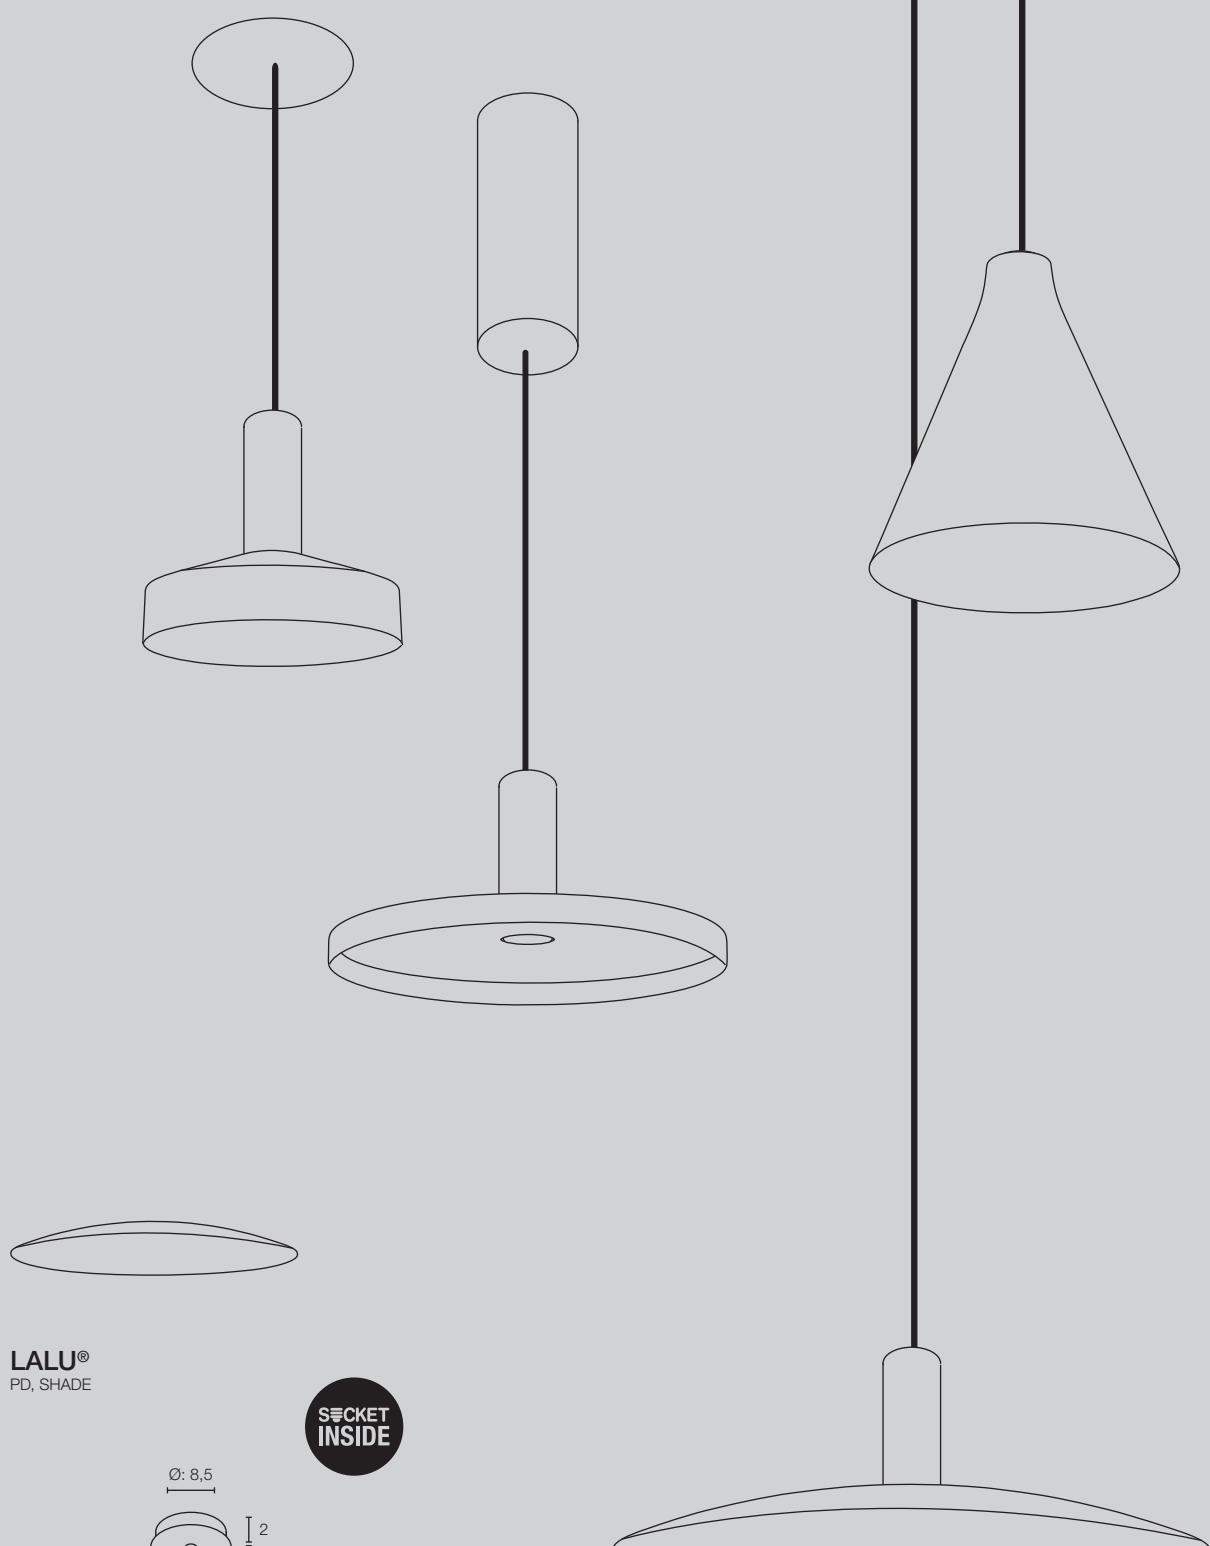

LALU®
PD, SHADE

SOCKET
INSIDE

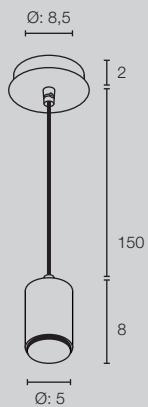

LALU®
PD, E27

ONE® 60
1005177





ONE®
Pendant lights (PD)

LED
INSIDE




ONE® TRIPLE DALI



ONE® 60 DALI



ONE® DOUBLE
PD DALI UP/DOWN

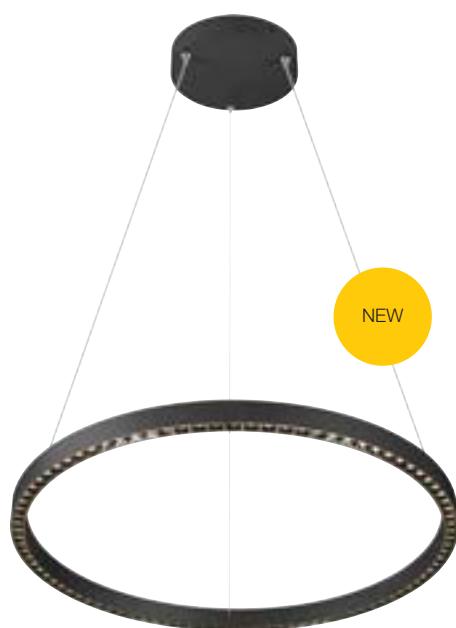


ONE® CUBE
DALI UP/DOWN

NEW

ONE® 60 PD, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

600mA

24W


CCT 3000 / 4000K

1480 / 1550lm

1002909
1002910



ONE® 60 PD, Up/Down, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

600mA

25W

CCT 3000 / 4000K

400 / 410lm
800 / 820lm

1004761
1004762



ONE® 60 PD, Up/Down, Phase



220-240V ~50/60Hz
Material: aluminium/steel



IP20

600mA

24W

CCT 2700 / 3000K

410 / 415lm

1004759
1004760
1005177



ONE® 80 PD, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

800mA

32W


CCT 3000 / 4000K

1930 / 2140lm

1002911
1002912



ONE® 80 PD, Up/Down, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

800mA

34W

CCT 3000 / 4000K


615 / 635lm

1004763
1004764





ONE® DOUBLE PD, Up/Down, Dali



220-240V ~50/60Hz
Material: aluminium/steel




- 1400mA 55W CCT 3000 / 4000K

1050 / 1060lm

1004767
1004768



ONE® DOUBLE PD, Up/Down, Phase



220-240V ~50/60Hz
Material: aluminium/steel



- 900mA 35W CCT 2700 / 3000K

615 / 635lm

1004765
1004766
1005178



ONE® TRIPLE PD, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20 1700mA 64W CCT 3000 / 4000K

4040 / 4200lm

1002913
1002914




ONE® CUBE PD, Dali



NEW

220-240V ~50/60Hz
Material: aluminium/steel



IP20 1400mA 54W 3000K 4000lm


1007661 ●
1007662 ●
1007663 ●
1007664 ●



ONE® CUBE PD, Up/Down, Dali



220-240V ~50/60Hz
Material: aluminium/steel




IP20 2100mA 80W 3000K UP 2000lm
DOWN 4000lm

1007665 ●
1007666 ●
1007671 ●
1007672 ●



ONE® LINEAR 140
1006190



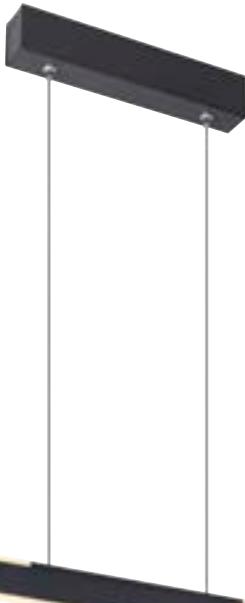


ONE® LINEAR 140



ONE® LINEAR 100

ONE® LINEAR 100 PD, Up/Down, Phase



220-240V ~50/60Hz
Material: aluminium/steel



- 600mA 24W CCT 2700 / 3000K

UP 550 / 580lm
DOWN 670 / 700lm


1006185

1006186

1006187



ONE® LINEAR 140 PD, Up/Down, Phase



220-240V ~50/60Hz
Material: aluminium/steel



- 900mA 35W CCT 2700 / 3000K

UP 830 / 860lm
DOWN 980 / 1015lm

1006188

1006189

1006190



ONE® 60
1002919




ONE® DOUBLE
1004766





ONE®
Wall and ceiling lights (CW)

LED
INSIDE

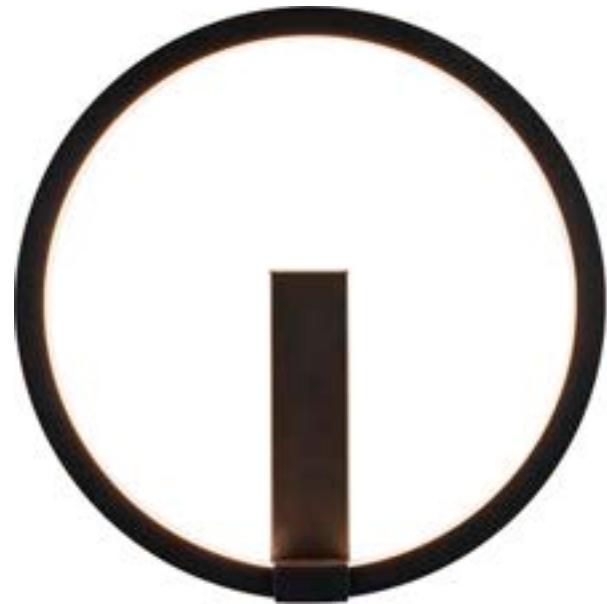

ONE® 40
CW, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

350mA

14W

CCT 3000 / 4000K

700 / 730lm

1002915
1002917



ONE® 60
CW, Dali



220-240V ~50/60Hz
Material: aluminium/steel



IP20

600mA

24W

CCT 3000 / 4000K

1350 / 1430lm

1002918
1002919




Detailed measurements and assembly information can be found on pages 200–201




ONE® 40 TRACK
1004769

ONE® 40 TRACK
Track 3Ph, Dali

220-240V ~50/60Hz
Material: aluminium



340° 100° 170°



-	350mA	15,2W	3000K	650lm	1004769
-	350mA	15,2W	4000K	670lm	1004770
-	350mA	15,2W	4000K	670lm	1004771
-	350mA	15,2W	4000K	670lm	1004772



Detailed measurements and assembly information can be found on pages 200–201



ONE® 40 TRACK
Track 3-phase system



Can be
pivoted 100° and
rotated 340°




ONE®
Floor lamps (FL)

LED
INSIDE



ONE® STRAIGHT
FL, Up/Down

220-240V - 50/60Hz
Material: steel/polycarbonate (PC)



-

24V

22W CCT 2700 / 3000K

UP 600 / 600lm
DOWN 600 / 600lm

UGR<22

1006355 ●

1006354 ●

1006353 ●

NEW



ONE® BOW FL, Up/Down

NEW



220-240V ~50/60Hz
Material: steel/polycarbonate (PC)



-

24V

22W

CCT 2700 / 3000K

UP 600 / 600lm
DOWN 600 / 600lm

UGR<22

1006352

1006351

1006350




ONE® STRAIGHT
1006353




ONE® BOW
1006351

ONE® SIZES


PENDANT LIGHTS




ONE® 60 / ONE® 60
PD, DALI PD, UP/DOWN, DALI




ONE® 60
PD, UP/DOWN, PHASE




ONE® 80 / ONE® 80
PD, DALI PD, UP/DOWN, DALI

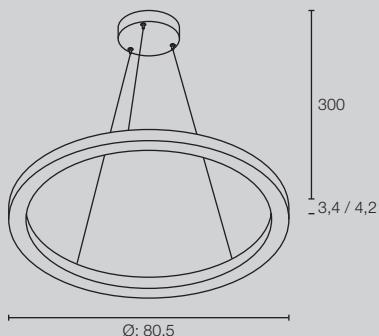


ONE® CUBE / ONE® CUBE
PD, DALI PD, UP/DOWN, DALI




ONE® DOUBLE 60
PD, UP/DOWN, DALI

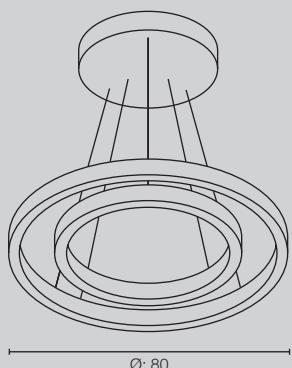



ONE® DOUBLE 80
PD, UP/DOWN, DALI

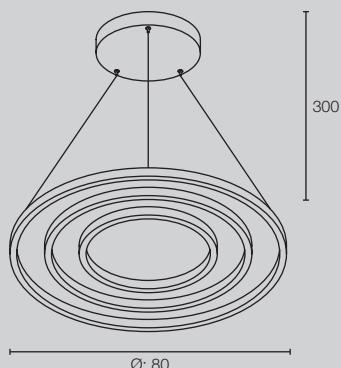


ONE® TRIPLE
PD, DALI

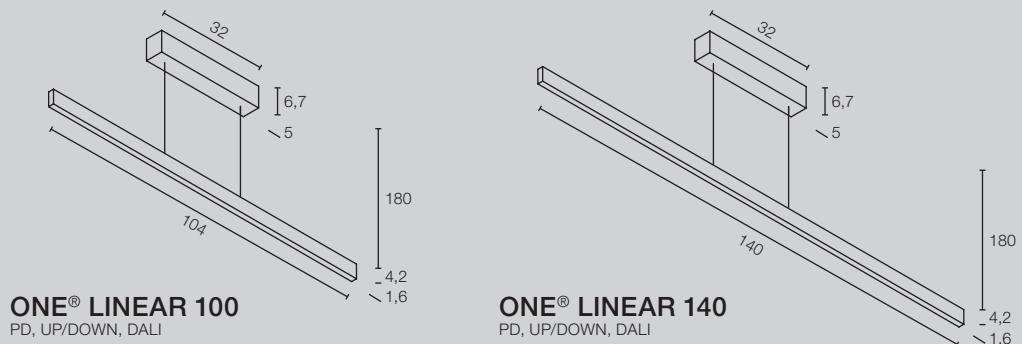



WALL LIGHTS



TRACK SYSTEM



FLOOR LAMPS

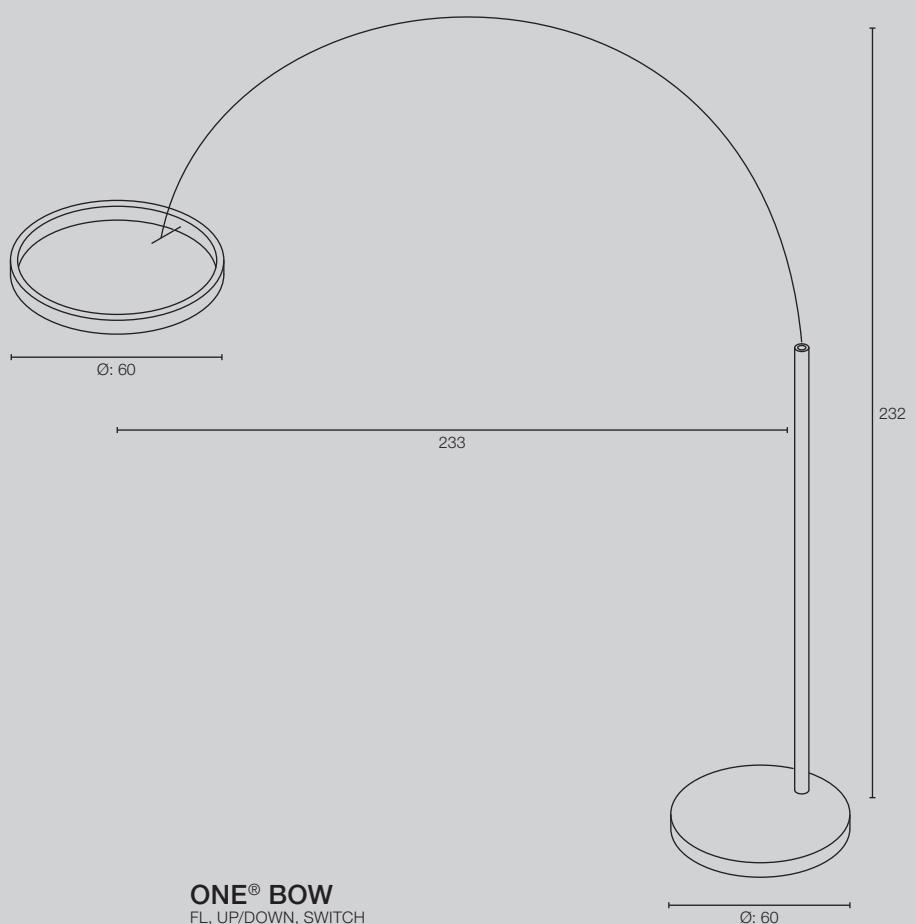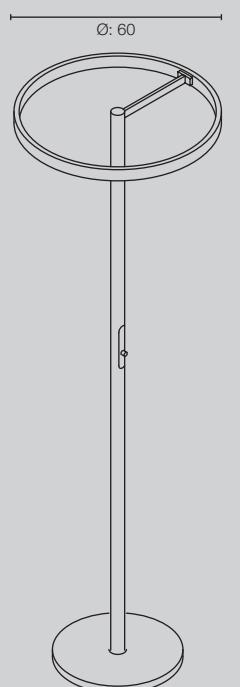



 LED OCCULDAS 14 230	 LED OCCULDAS 23 230	 LED CONTONE® 231	 LED CONTONE® 231	 LED H-LIGHT 232	 LED KARPO 30 232
 SOCKET PLASTRA 233	 SOCKET PLASTRA 233	 LED DEKLED 234	 SOCKET VARU 234	 SOCKET DOLIX OUT 235	 SOCKET DOLIX OUT 235
 LED KAMUELA ECO 236	 LED KAMUELA ECO 237	 LED KINI 237	 LED AKALO D83 237	 LED FRAME BASIC SET 238	 LED FRAME BASIC 238
 LED FRAME BASIC 238	 LED FRAME CURVE 239	 LED FRAME CURVE 239	 LED QUAD FRAME 9 240	 LED NOTAPO S 241	 LED NOTAPO L 241
 LED DOWNUNDER PUR 80 242	 LED DOWNUNDER PUR 150 242	 LED MOBALA 243	 LED WORO 243	 LED LED PANEL 243	 LED PATTA-I 244
 LED PATTA-I 244	 LED PATTA-I 245	 LED PATTA-I 245	 LED PATTA-F 246	 LED PATTA-F 247	

1007095 + 1007180 205





UNIVERSAL DOWNLIGHT

Cover, round

UNIVERSAL DOWNLIGHT


DL, PHASE



Diameter: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)




Options	Prod. no.
● black	1007096 ●
○ white	1007097 ●
■ gold	1007099 ●
■ matt gold	1007192 ●
■ aluminium	1007098 ●



UNIVERSAL DOWNLIGHT

Cover, square



L: 8.8 cm
W: 8.8 cm
H: 0.35 cm
Material: polycarbonate (PC)



5W

410lm	2700K
430lm	3000K
470lm	4000K
440lm	6500K

8W

560lm	2700K
610lm	3000K
680lm	4000K
640lm	6500K

Options	Prod. no.
● black	1007180 ●
○ white	1007181 ●
■ gold	1007183 ●
■ matt gold	1007193 ●
■ aluminium	1007182 ●

Options	Prod. no.
● black	1007095 ●

1007090 + 1007184 **205**

**WATCH OUT
MONSTER INSIDE**

1002



UNIVERSAL DOWNLIGHT


Cover, round

UNIVERSAL DOWNLIGHT


DL, Move, PHASE



Diameter: 8.8 cm
 H: 0.35 cm
 Material: polycarbonate (PC)



Options	Prod. no.
● black	1007091 ●
○ white	1007092 ●
■ gold	1007094 ●
■ matt gold	1007191 ●
■ aluminium	1007093 ●



UNIVERSAL DOWNLIGHT

Cover, square



L: 8.8 cm
 W: 8.8 cm
 H: 0.35 cm
 Material: polycarbonate (PC)



5W

410lm	2700K
610lm	3000K
680lm	4000K
640lm	6500K

8W

560lm	2700K
610lm	3000K
680lm	4000K
640lm	6500K



Options	Prod. no.
● black	1007184 ●
○ white	1007185 ●
■ gold	1007187 ●
■ matt gold	1007194 ●
■ aluminium	1007186 ●

Options	Prod. no.
● black	1007090 ●

UNIVERSAL DOWNLIGHT
DL with Cover, Multipack



NEW



220-240V ~50/60Hz | 60/90mA

Total wattage: 5W/8W

Material: steel

- Material thickness of mounting surface:
max. 25 mm





CRI 90

5W	560lm 2700K 610lm 3000K 680lm 4000K 640lm 6500K
8W	560lm 2700K 610lm 3000K 680lm 4000K 640lm 6500K



Options	Prod. no.
● black	1007271
○ white	1007272

1007271 208

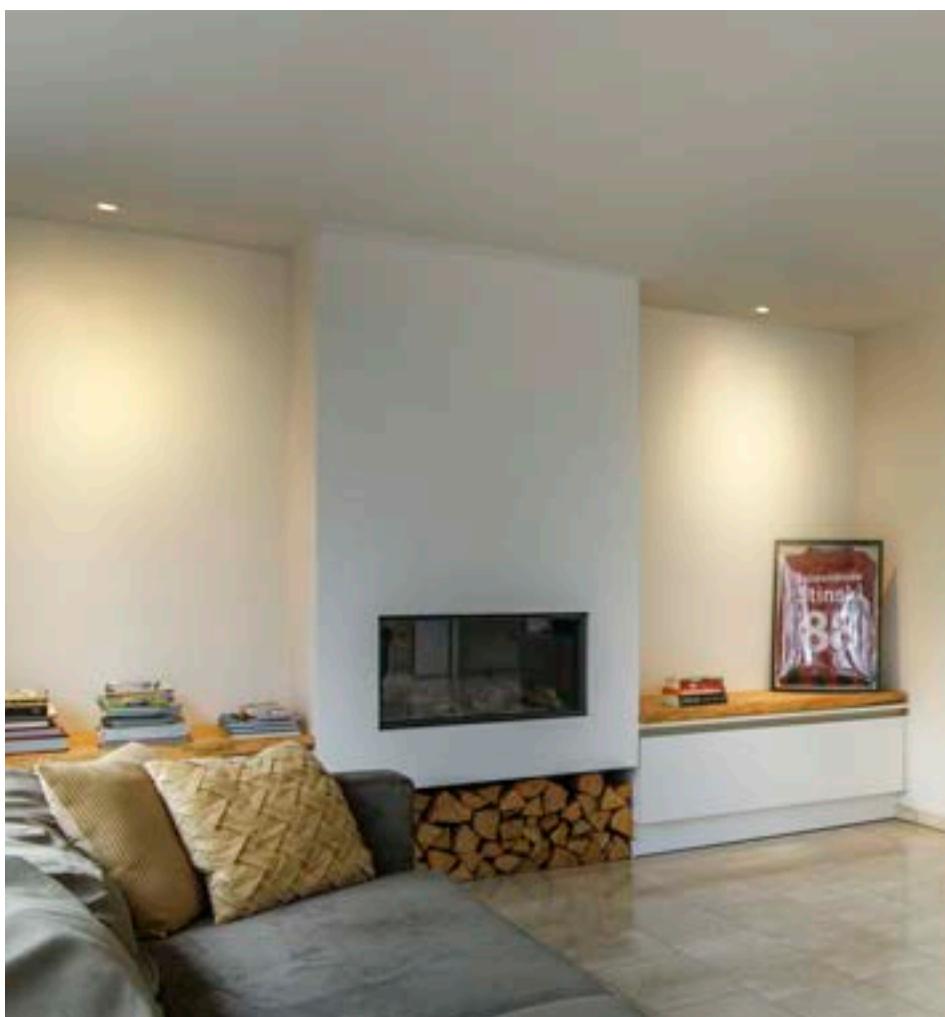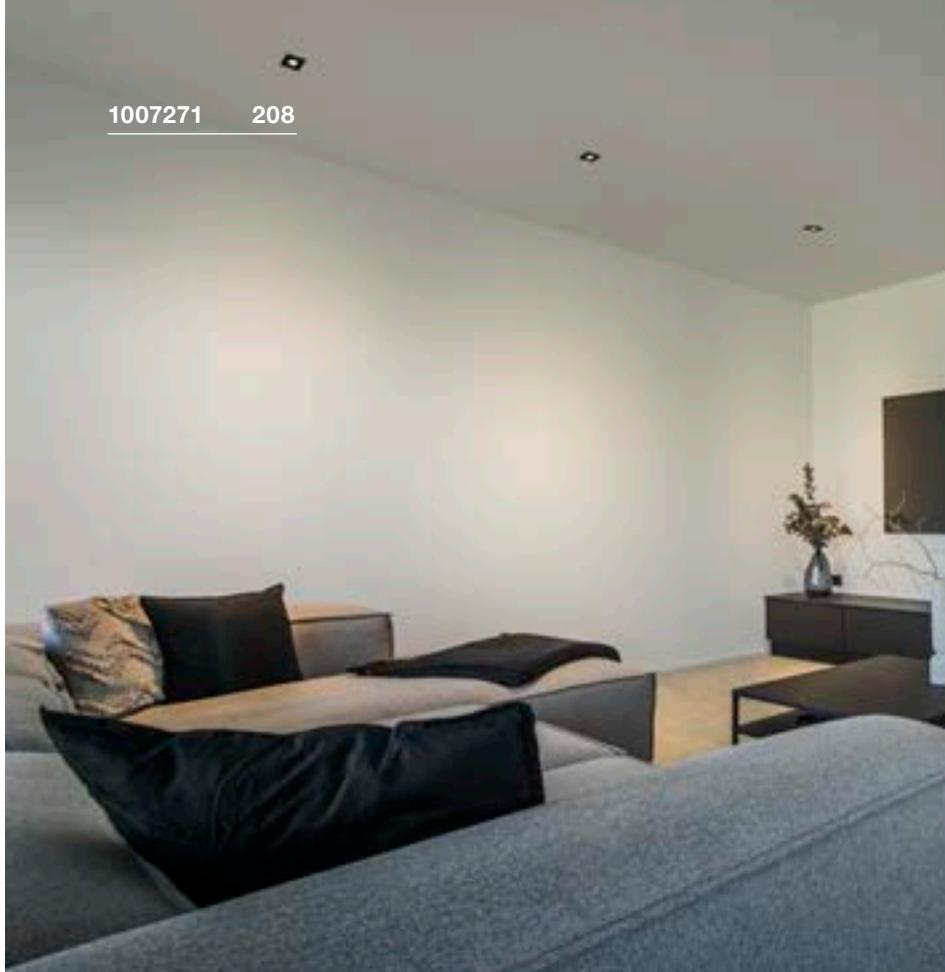



UNIVERSAL DOWNLIGHT DL with Cover, Multipack

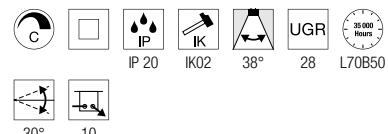

1007274 209

220-240V ~50/60Hz | 60/90mA
Total wattage: 5W/8W
Material: steel

- Material thickness of mounting surface:
max. 25 mm



5W	410lm	2700K
	610lm	3000K
	680lm	4000K
	640lm	6500K
8W	560lm	2700K
	610lm	3000K
	680lm	4000K
	640lm	6500K

Options	Prod. no.
<input checked="" type="radio"/> black	1007273
<input type="radio"/> white	1007274



DESIGN YOUR DL DOWNLIGHT

Unobtrusive and universally applicable: the UNIVERSAL DOWNLIGHT as a rigid and pivoting version are recessed lights that produce a targeted light with their narrow beam angle of 36 degrees. A wide range of colour temperature options (2700/3000/4000/6000K) can be selected via the CCT switch before installation. Natural colour reproduction is achieved with a CRI of over 90. The Quick Connector Box ensures the downlight is quick and easy to install. Complement your universal downlight with the separately available round or square cover, available in black, white, chrome, gold glossy and gold matt.

CHOOSE YOUR FAVOURITE ...

- ① Version (rigid, pivoting)
- ② Bezel (black, white, chrome, gold glossy, gold matt)
- ③ Colour temperature (2700, 3000, 4000, 6500K)
- ④ Total wattage (5W, 8W)



DONE!

UNIVERSAL DOWNLIGHT

UNIVERSAL DOWNLIGHT



Available as a square or round rigid version

UNIVERSAL DOWNLIGHT MOVE



Available as a square or round pivoting version



Easy installation by means of quick connector connection box



Replaceable bezel in square or round and in the colours black, white, chrome, gold glossy or gold matt



2700K 3000K 4000K 6500K

Adjustable colour temperature

2700K 3000K 4000K 6500K



Adjustable total wattage 5W / 8W



High light quality and colour reproduction
thanks to LED with CRI90

1007560 213



1007567 213



1007551 213











KADUX
DL, single, PHASE



KADUX
DL, double, PHASE



KADUX
DL, triple, PHASE



220-240V ~50/60Hz | 350mA

Total wattage: 7.5W

Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

220-240V ~50/60Hz | 350mA

Total wattage: 14W

Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

220-240V ~50/60Hz | 350mA

Total wattage: 20W

Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Down

770lm | 3000K



Down

1510lm | 3000K



Down

2310lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007551
<input type="radio"/> white	1007552

Options	Prod. no.
<input checked="" type="radio"/> black	1007559
<input type="radio"/> white	1007560

Options	Prod. no.
<input checked="" type="radio"/> black	1007567
<input type="radio"/> white	1007568






KADUX
EL, single, QPAR51



KADUX
EL, double, QPAR51



KADUX
EL, triple, QPAR51




220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Base: 1xGU10




220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Base: 2xGU10



220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Base: 3xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	115510
<input type="radio"/> white	115511

Options	Prod. no.
<input checked="" type="radio"/> black	115520
<input type="radio"/> white	115521

Options	Prod. no.
<input checked="" type="radio"/> black	115530
<input type="radio"/> white	115531

 LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h
Prod. no.: **1005273**

 LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h
Prod. no.: **1005273**

 LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h
Prod. no.: **1005079**



115550

215



KADUX
EL, single, QPAR111




KADUX
EL, double, QPAR111



115531

214



220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm




Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	115540
<input type="radio"/> white	115541



QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no.: **1005274**



220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm



Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	115550
<input type="radio"/> white	115551



QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no.: **1005274**











MILANDOS 4 DL



MILANDOS 6 DL



MILANDOS 8 DL



700mA
Power consumption: 8W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 40mm



Down	510lm 520lm 650lm	2700K 3000K
------	-----------------------	---------------

Options	Prod. no.
● black 510lm 2700K	1005407
● black 520lm 3000K	1005408
○ white 650lm 3000K	1005410



Product	Prod. no.
LED driver 20W 250-700mA 1-10V/DALI dimmable inc. strain relief	1002423
○ white	1002423
LED driver 10W 700mA dimmable inc. strain relief	1007213 ●



700mA
Power consumption: 12W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 40mm



Down	770lm 780lm 980lm	2700K 3000K
------	-----------------------	---------------

Options	Prod. no.
● black 770lm 2700K	1005415
● black 780lm 3000K	1005416



Product	Prod. no.
LED driver 15W 250-700mA strain relief included	
○ white	1006202
LED driver 20W 700mA dimmable strain relief included	1002423
○ white	1002423



700mA
Power consumption: 16W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 40mm




Down	1030lm 1040lm	2700K 3000K
------	-----------------	---------------

Options	Prod. no.
● black 1030lm 2700K	1005423
● black 1040lm 3000K	1005424



Product	Prod. no.
LED driver 20W 250-700mA strain relief included	
○ white	1006202
LED driver 20W 700mA dimmable inc. strain relief	1002423
○ white	1002423

HORN MINI
EL



350mA

Power consumption: 1W

Material: aluminium/polycarbonate (PC)

- Spring clips
- AMP plug included
- Different light colour with golden reflector
- Driver not included



Down

70lm | 2900K
3000K

Options	Prod. no.
● black	
3000K	1000915
● black/gold	
2900K	1000917
○ white	
3000K	1000914



Product	Prod. no.
1m cable extension	
○ white	111861
LED driver 3W 350mA inc. AMP socket	
○ white	1007270
Connector strip 3 outlets	
● black	111850

113141

219



1000914 218









HORN DL, single, QPAR51



HORN DL, double, QPAR51




HORN DL, single, asymmetric, QPAR51




220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm



220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm



220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	113140
<input type="radio"/> white	113141



Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1006121
<input type="radio"/> white	1006122



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	113150
<input type="radio"/> white	113151



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h

Prod. no.: **1005077**



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h

Prod. no.: **1005077**



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEEK=G
6kWh/1000h

Prod. no.: **1005273**






HORN
DL, single, QPAR51



HORN
EL, single, QPAR51




HORN
DL, GU10, blower door tested




220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm



220-240V ~50/60Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 45mm



220-240V ~50/60Hz
Material: aluminium

- The downlight meets the RT2012 standards.
- Material thickness of mounting surface: max. 30 mm



Base: 1xGU10



Base: 1xGU10 Max. Ø: 5.1 cm | L: 5.4 cm



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	113160
<input type="radio"/> white	113161

Options	Prod. no.
<input checked="" type="radio"/> black	112910
<input type="radio"/> white	112911

Options	Prod. no.
<input checked="" type="radio"/> black	1005435
<input type="radio"/> white	1005436

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h
Prod. no.: **1005077**



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h
Prod. no.: **1005077**



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h
Prod. no.: **1005077**





112911

220








1002592 221




HORN-T EL, QPAR111



HORN MAGNA EL

220-240V ~50/60Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

500mA
Power consumption: 9W
Material: aluminium/polycarbonate (PC)

- Different light colour with golden reflector
- Spring clips
- Material thickness of mounting surface: max. 25 mm
- Open cable end



Base: 1xGU10

445lm
550lm
570lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	113170
<input type="radio"/> white	113171

Options	Prod. no.
<input checked="" type="radio"/> black	1002592
445lm	
<input checked="" type="radio"/> black/gold	1002594
570lm	
<input type="radio"/> white	1002591
550lm	

QPAR111 | 8W | 38°
2700K | 680lm | EEE=F
8kWh/1000h

Prod. no.: 1005274




Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	
<input type="radio"/> white	1007227
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 21W 500mA strain relief included	
<input type="radio"/> white	1007226

1003010 **223**





SENSOR 12 EL, round



200mA
Power consumption: 6.4 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm




Down 420lm | 3000K
470lm | 4000K

Options	Prod. no.
<input type="radio"/> white 420lm 3000K 6.4W	1003008
<input type="radio"/> white 470lm 4000K 6W	1004694



Product	Prod. no.
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white 1007229	
LED driver 10W 200mA dimmable inc. strain relief	
<input type="radio"/> white 1007215	

SENSOR 18 EL, round



350mA
Power consumption: 10W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm





Down 880lm | 3000K
990lm | 4000K

Options	Prod. no.
<input type="radio"/> white 880lm 3000K 10W	1003009
<input type="radio"/> white 990lm 4000K 12W	1004695



Product	Prod. no.
LED driver 20W 350mA dimmable	
<input type="radio"/> white 1007228	
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white 1007229	

SENSOR 24 EL, round



500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



Down 1200lm | 3000K
1300lm | 4000K

Options	Prod. no.
<input type="radio"/> white 1200lm 3000K	1003010
<input type="radio"/> white 1300lm 4000K	1004696



Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	
<input type="radio"/> white 1007227	
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white 1007229	
LED driver 21W 500mA strain relief included	
<input type="radio"/> white 1007226	

1003011 225











SENSOR 12
EL, square



SENSOR 18
EL, square



SENSOR 24
EL, square



200mA
Power consumption: 6.4 W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



Down 440lm | 3000K 4000K




350mA
Power consumption: 10W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



Down 880lm | 4000K 900lm | 3000K



500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



Down 1100lm | 3000K 1240lm | 4000K

Options	Prod. no.
<input type="radio"/> white 3000K	1003011
<input type="radio"/> white 4000K	1004697

Options	Prod. no.
<input type="radio"/> white 900lm 3000K 10W	1003012
<input type="radio"/> white 880lm 4000K 12W	1004698

Options	Prod. no.
<input type="radio"/> white 1100lm 3000K	1003013
<input type="radio"/> white 1240lm 4000K	1004699

Product	Prod. no.
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 10W 200mA dimmable inc. strain relief	
<input type="radio"/> white	1007215


Product	Prod. no.
LED driver 20W 350mA dimmable	
<input type="radio"/> white	1007228
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229

Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	
<input type="radio"/> white	1007227
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 21W 500mA strain relief included	
<input type="radio"/> white	1007226


112682 227



112222 227

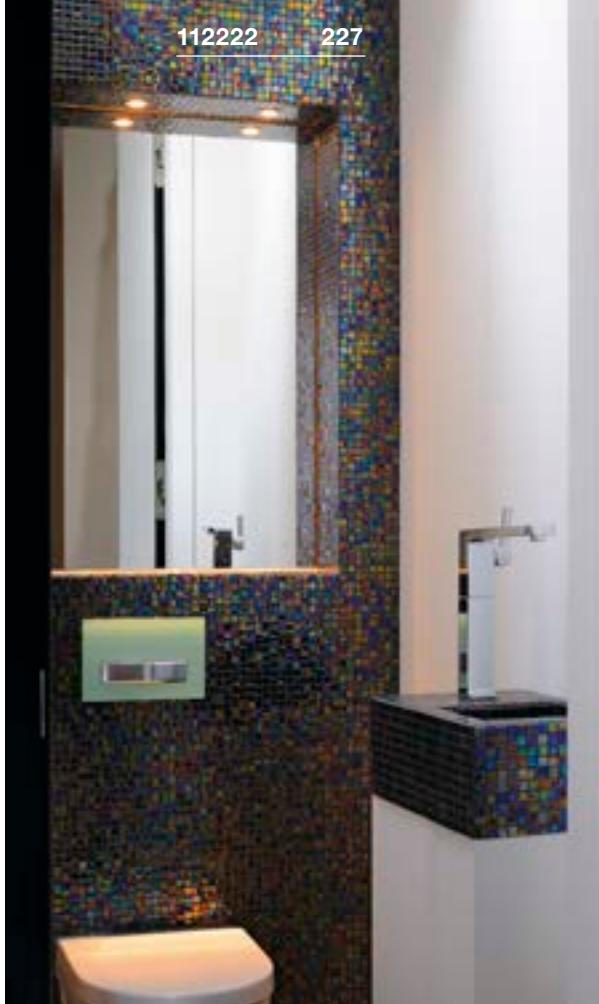

112225 227

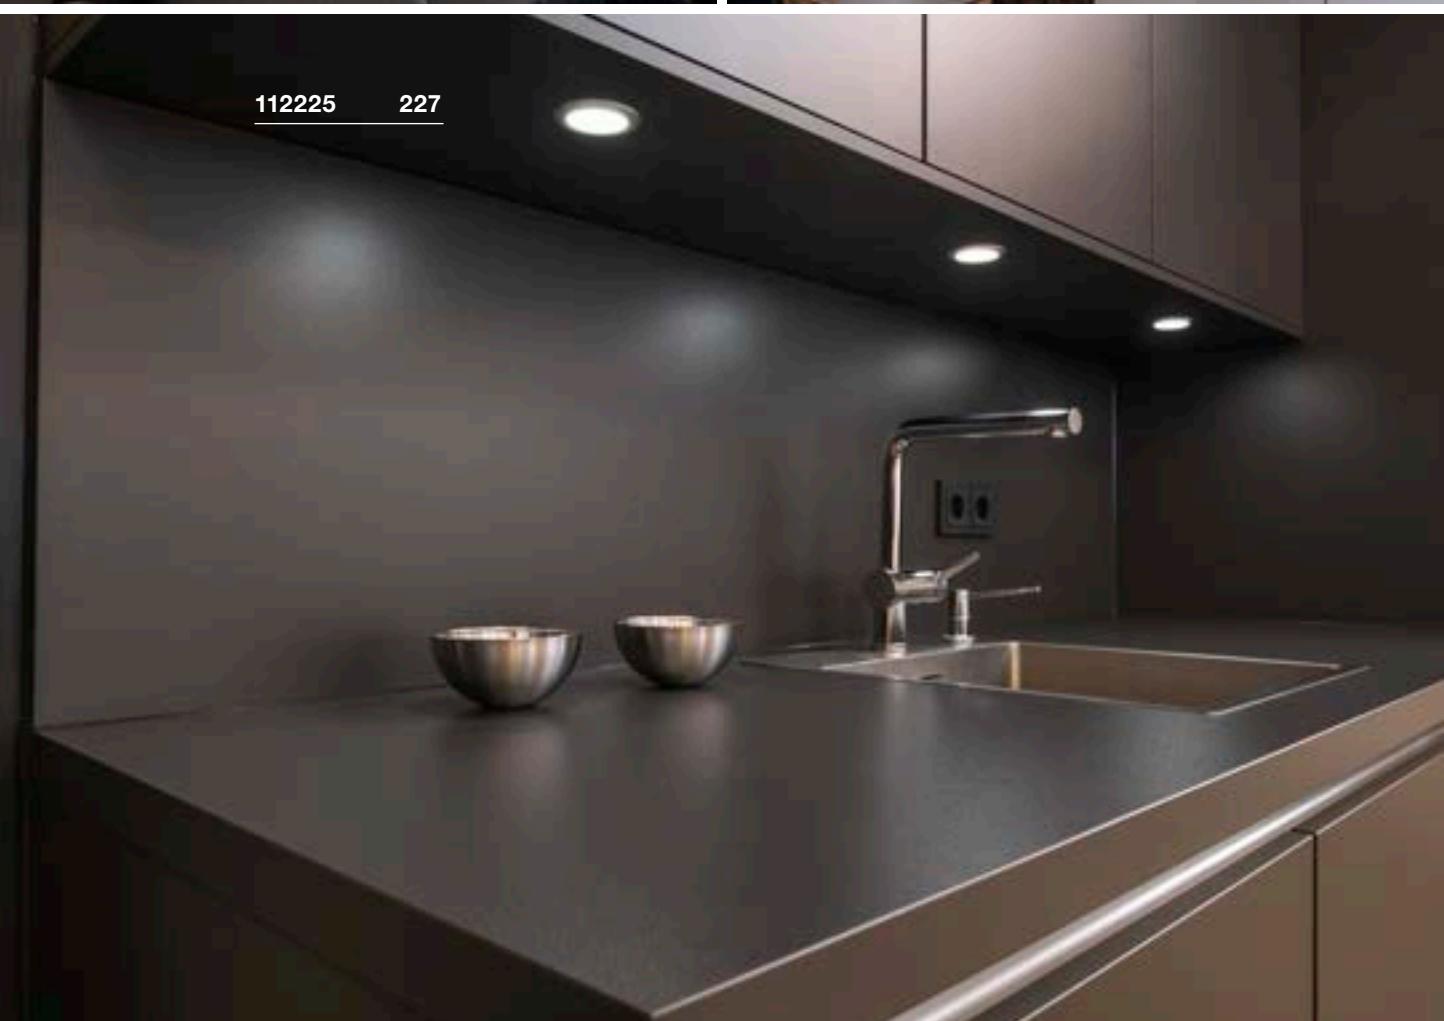







VERLUX EL, square, PHASE



VERLUX EL, square, PHASE



DL 126 EL



220-240V ~50/60Hz | 500mA

Total wattage: 11W


Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 20mm

CRI
80

Down

940lm | 3000K



220-240V ~50/60Hz | 500mA

Total wattage: 22W


Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 25 mm

CRI
80

Down

1800lm | 3000K



12V DC

Power consumption: 2.8W

Material: aluminium/plastic

- Spring clips

CRI
80

Down

170lm | 3000K

Options	Prod. no.
<input type="radio"/> white	112682

Options	Prod. no.
<input type="radio"/> white	112692

Options	Prod. no.
<input type="radio"/> white	112221
<input checked="" type="radio"/> chrome	112222
<input type="radio"/> grey	112225



Product Prod. no.

LED power supply, 12/20W | 24V inc. strain relief

<input type="radio"/> white	1005381
-----------------------------	---------

LED power supply 15W | 12V

<input type="radio"/> white	1005444
-----------------------------	---------




PIKA
DL, round, QPAR51, rigid



PIKA
DL, round, QPAR51, pivoting



1000719 228




220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 13mm



Base: 1xGU10



220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	1000714
<input checked="" type="radio"/> brass	1000716
<input type="radio"/> chrome	1000715
<input type="radio"/> grey	1000717



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: **1005077**


Options	Prod. no.
<input type="radio"/> white	1000718
<input checked="" type="radio"/> brass	1000720
<input type="radio"/> chrome	1000719
<input type="radio"/> grey	1000721



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h





Prod. no.: **1005075**

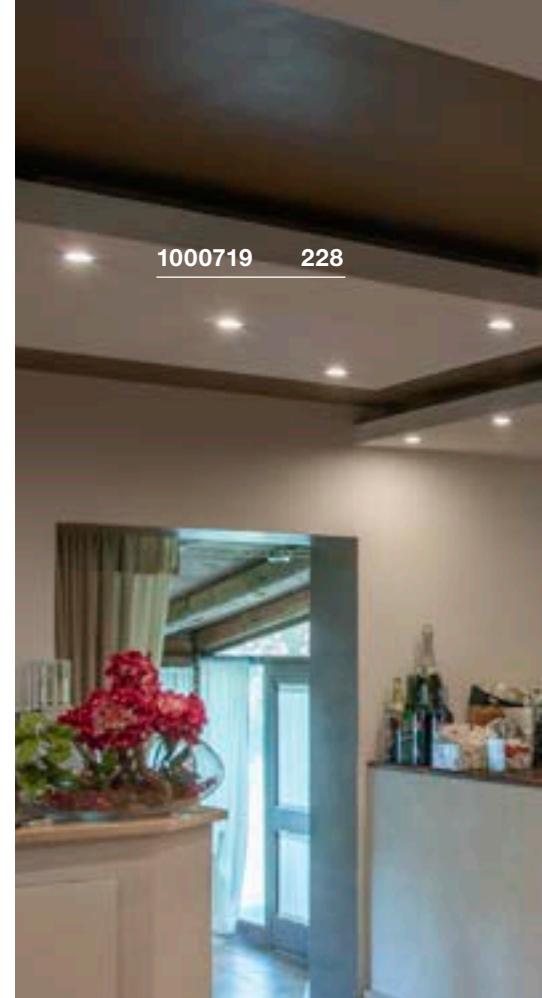




OCULUS

CL, Move, PHASE



8 cm



220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/glass

- Spring clips
- Additional frosted lens included
- Material thickness of mounting surface: max. 20mm



CRI
90

Down 36lm | 2000K - 780lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1004668
<input type="radio"/> white	1004669

**1004669 229**

OCCULDAS 14
EL, indirect, PHASE



220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 20mm



CRI
80

Down

810lm | 3000K



220-240V ~50/60Hz | 700mA

Total wattage: 23W

Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



CRI
80


Down

1500lm | 3000K



Options	Prod. no.
<input type="radio"/> white	117331

Options	Prod. no.
<input type="radio"/> white	117311

OCCULDAS 23
EL, indirect, PHASE



117311 **230**

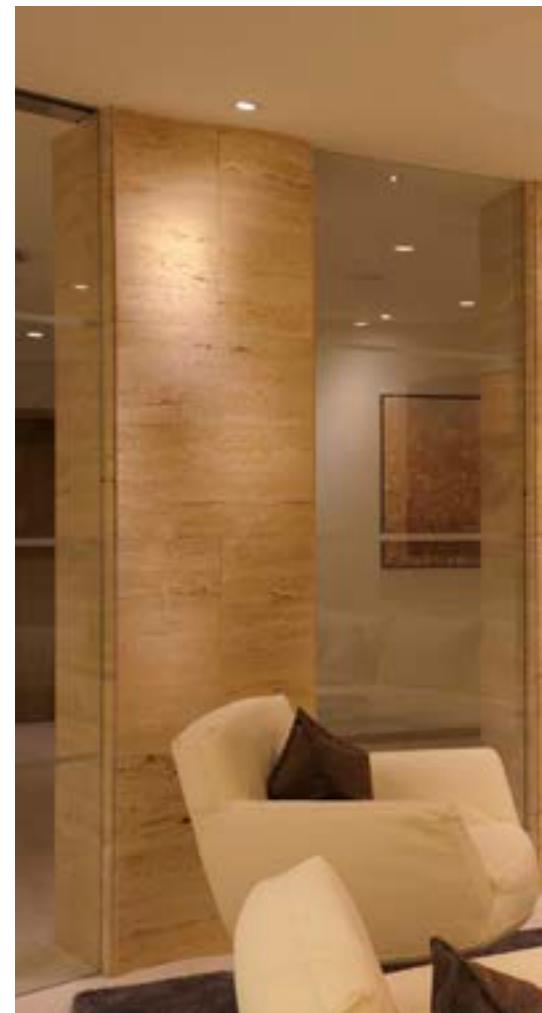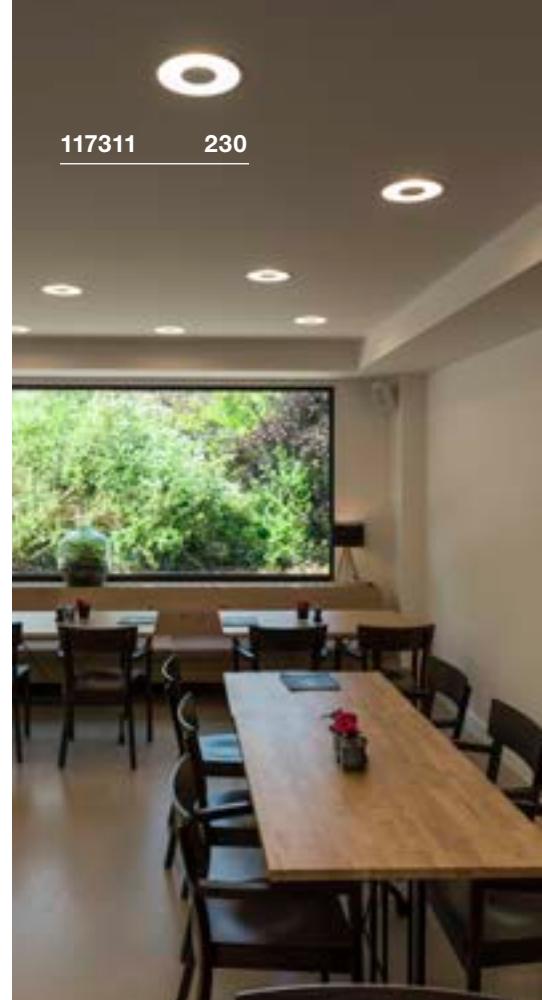




CONTONE®
DL, round, adjustable, PHASE



CONTONE®
DL, round, rigid, PHASE



161271 231



220-240V ~50/60Hz | 350mA


Total wattage: 15W

Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm



Down 1000lm | 2000-3000K



220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25 mm





Down 1000lm | 2000-3000K

Options	Prod. no.
<input type="radio"/> white	161271

Options	Prod. no.
<input type="radio"/> white	161291

H-LIGHT DL, round, PHASE



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm



CRI
80



Down

265lm | 2700K

Options Prod. no.

Options	Prod. no.
<input checked="" type="radio"/> black	114480
<input type="radio"/> white	114481

KARPO 30 EL



500mA

Total wattage: 7.5W

Material: aluminium/steel

- Material thickness of mounting surface: max. 12mm. When connecting several lights, make sure that they are connected in series!
- Spring clips
- AMP plug included
- Material thickness of mounting surface: max. 12 mm



CRI
90

Down

450lm | 470lm | 3000K

Options Prod. no.

Options	Prod. no.
<input checked="" type="radio"/> black	152380
<input type="radio"/> white	152381



Product Prod. no.

LED driver 20W 350mA/500mA PHASE	
<input type="radio"/> white	1007227
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 21W 500mA strain relief included	
<input type="radio"/> white	1007226








148071 233



PLASTRA
RL, round, QPAR51





PLASTRA
RL, square, QPAR51



220-240V ~50/60Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 25 mm



220-240V ~50/60Hz
Material: plaster/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	148070



Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	148071



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no.: 1005273



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005076





350mA
Total wattage: 1W
Material: aluminium/polycarbonate (PC)


- Spring clips



Down 60lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> grey	112242

Product	Prod. no.
LED driver 350mA 6W dimmable	



220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 15mm



Base: 1xGU10 Max. diameter: 5.1 cm

Options	Prod. no.
<input checked="" type="radio"/> black	1001930
<input type="radio"/> white	1001931

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077






1001165 235





1001166 235



DOLIX OUT EL, round, QPAR51



DOLIX OUT EL, square, QPAR51



220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm




Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	1001165
<input checked="" type="radio"/> silver	1001168
<input type="radio"/> chrome	1001166
<input type="radio"/> grey	1001167



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**



220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm



Base: 1xGU10




Options	Prod. no.
<input type="radio"/> white	1001169
<input checked="" type="radio"/> silver	1001172
<input type="radio"/> grey	1001171



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**

KAMUELA ECO
EL, round, PHASE

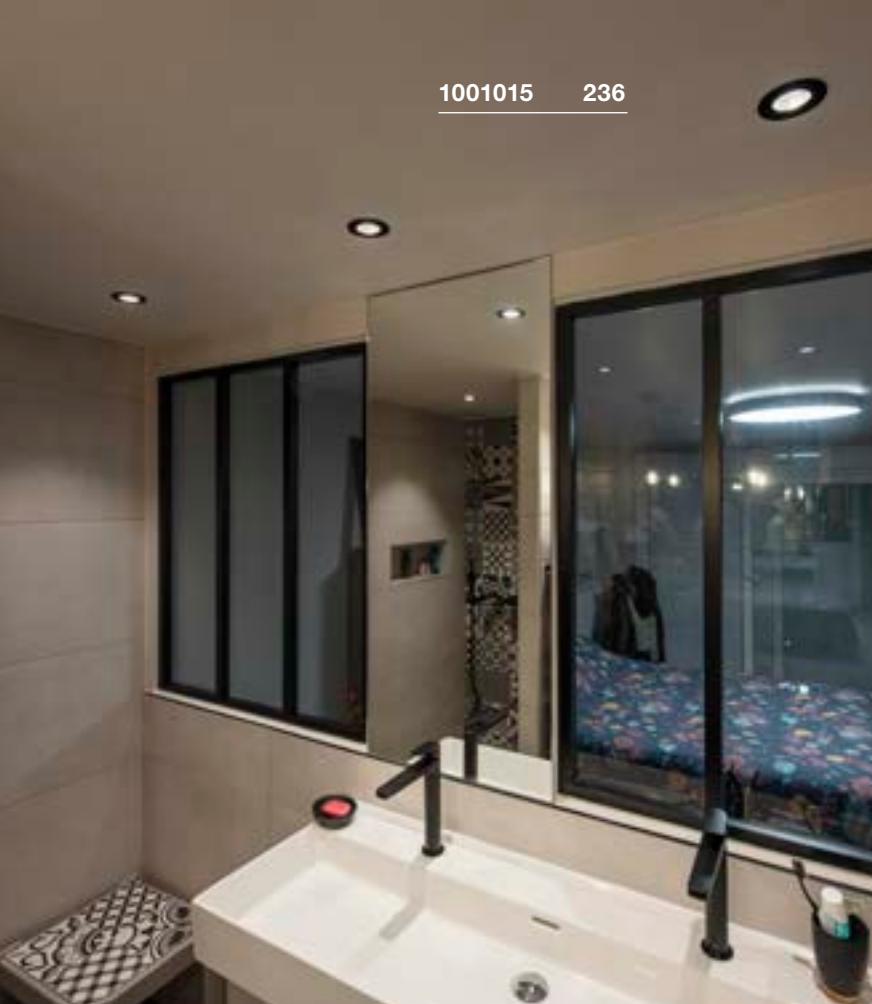

220-240V ~50Hz
Total wattage: 6W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 40mm
- Fire resistant for at least 90 minutes compliant with BS 476-21




CRI
84

Down

500lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1001015
<input type="radio"/> white	1001016

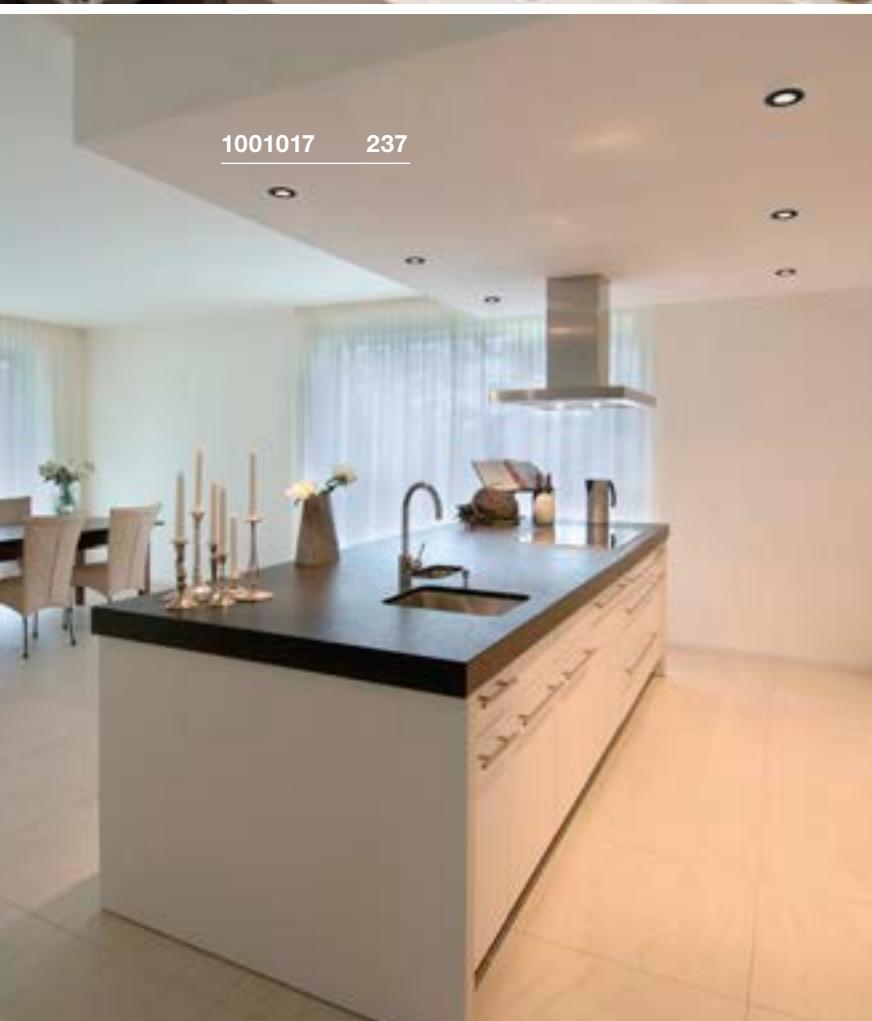








KAMUELA ECO EL, round, PHASE



KINI EL, PHASE



AKALO D83 EL



220-240V ~50Hz
Total wattage: 6W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 40mm
- Fire resistant for at least 90 minutes compliant with BS 476-21



Down 530lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1001017
<input type="radio"/> white	1001018



Down 850lm | 3000K



Options	Prod. no.
<input type="radio"/> white	1000833



800lm | 3000K 880lm | 4000K 850lm | 5700K

Options	Prod. no.
<input type="radio"/> white	1001264

FRAME BASIC SET RL



220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/acrylic


- Spring clips
- Material thickness of mounting surface: max. 20mm



Down 600lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	112720
<input type="radio"/> white	112721

FRAME BASIC RL, HV



100-240V ~50/60Hz | 350mA
Total wattage: 3W
Material: aluminium

- Material thickness of mounting surface: max. 30 mm



Down 170lm | 2700K


Options	Prod. no.
<input type="radio"/> white	1000576
<input checked="" type="radio"/> grey	1000577



Product	Prod. no.
Wall box	
<input checked="" type="radio"/> black	112781

Flush frame	
<input checked="" type="radio"/> gold	112780

FRAME BASIC



350mA
Total wattage: 1W
Material: aluminium/glass

- When connecting several lights, make sure they are connected in series!
- AMP plug included
- Material thickness of mounting surface: max. 30 mm



Down 40lm | 3000K

Options	Prod. no.
<input type="radio"/> white	113262
<input checked="" type="radio"/> grey	111262






Product	Prod. no.
Wall box	
<input checked="" type="radio"/> black	112781
1m cable extension	
<input type="radio"/> white	111861
LED driver 3W 350mA inc. AMP socket	
<input type="radio"/> white	1007270
Connector strip 3 outlets	
<input checked="" type="radio"/> black	111850
Flush frame	
<input checked="" type="radio"/> gold	112780



FRAME CURVE EL

1000575 239



100-240V ~50/60Hz | 350mA

Total wattage: 3W

Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm




Down 140lm | 2700K

Options	Prod. no.
<input type="radio"/> white	1000574
<input checked="" type="radio"/> grey	1000575



Product	Prod. no.
Wall box	
<input checked="" type="radio"/> black	112781
Flush frame	
<input checked="" type="radio"/> gold	112780



350mA

Total wattage: 1W

Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Spring clips
- AMP plug included
- Material thickness of mounting surface: max. 25 mm




Down 60lm | 3000K

Options	Prod. no.
<input type="radio"/> white	113292
<input checked="" type="radio"/> grey	111292




Product	Prod. no.
Wall box	
<input checked="" type="radio"/> black	112781
1m cable extension	
<input type="radio"/> white	111861
LED driver 3W 350mA inc. AMP socket	
<input type="radio"/> white	1007270
Connector strip 3 outlets	
<input checked="" type="radio"/> black	111850
Flush frame	
<input checked="" type="radio"/> gold	112780

1000577 238

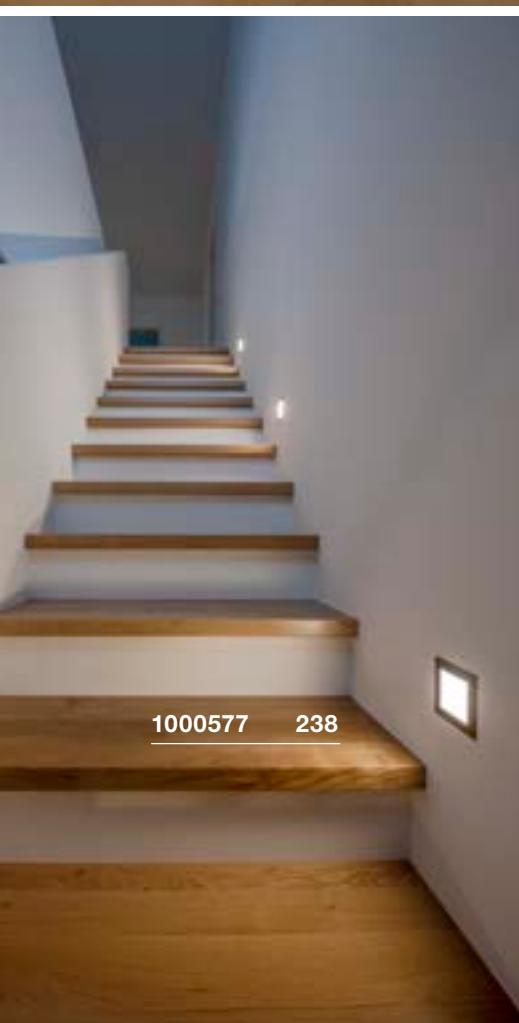

QUAD FRAME 9 WL



L70B50

100-240V ~50/60Hz | 350mA

Total wattage: 3W

Material: aluminium

- Material thickness of mounting surface:
max. 30 mm



Down

75lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1003466



Product	Prod. no.
Wall box	
<input checked="" type="radio"/> black	112781
Flush frame	
<input type="radio"/> gold	112780





1003466 240



NOTAPO S RL





1002979 241

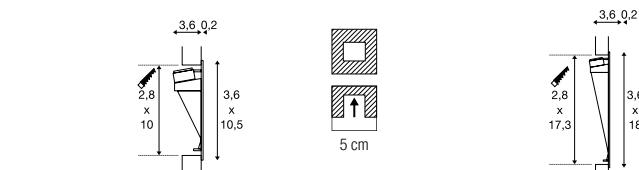

700mA
Power consumption: 2.2W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Open cable end

NOTAPO L RL



700mA
Power consumption: 2.2W
Material: aluminium

- When connecting several lights, make sure they are connected in series!
- Leaf springs
- Open cable end



1002980 241



Down 6lm | 3000K



Down 6lm | 3000K



Options	Prod. no.
<input type="radio"/> white	1002979

Product	Prod. no.
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 700mA 3W inc. strain relief	
<input type="radio"/> white	1007216
NOTAPO mounting frame	
● black	1002981

Options	Prod. no.
<input type="radio"/> white	1002980

Product	Prod. no.
LED driver 10W 700mA dimmable inc. strain relief	
<input type="radio"/> white	1007213
LED driver 700mA 3W inc. strain relief	
<input type="radio"/> white	1007216
NOTAPO mounting frame	
● black	1002981

DOWNUNDER PUR 80 EL



350mA
Total wattage: 3.6W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs





Down 180lm | 3000K

Options	Prod. no.
<input type="radio"/> white	151950



Product	Prod. no.
Mounting frame	
<input checked="" type="radio"/> grey	151960
1m cable extension	
<input type="radio"/> white	111861
LED driver 3W 350mA inc. AMP socket	
<input type="radio"/> white	1007270
Connector strip 3 outlets	
<input checked="" type="radio"/> black	111850

DOWNUNDER PUR 150 EL



500mA
Total wattage: 5.2W
Material: aluminium/steel

- When connecting several lights, make sure they are connected in series!
- Leaf springs




Down 230lm | 3000K

Options	Prod. no.
<input type="radio"/> white	151952



Product	Prod. no.
Mounting frame	
<input checked="" type="radio"/> grey	151962
LED driver 20W 350mA/500mA PHASE	
<input type="radio"/> white	1007227
LED driver 25W 150-700mA DALI dimmable	
<input type="radio"/> white	1007229
LED driver 21W 500mA strain relief included	
<input type="radio"/> white	1007226

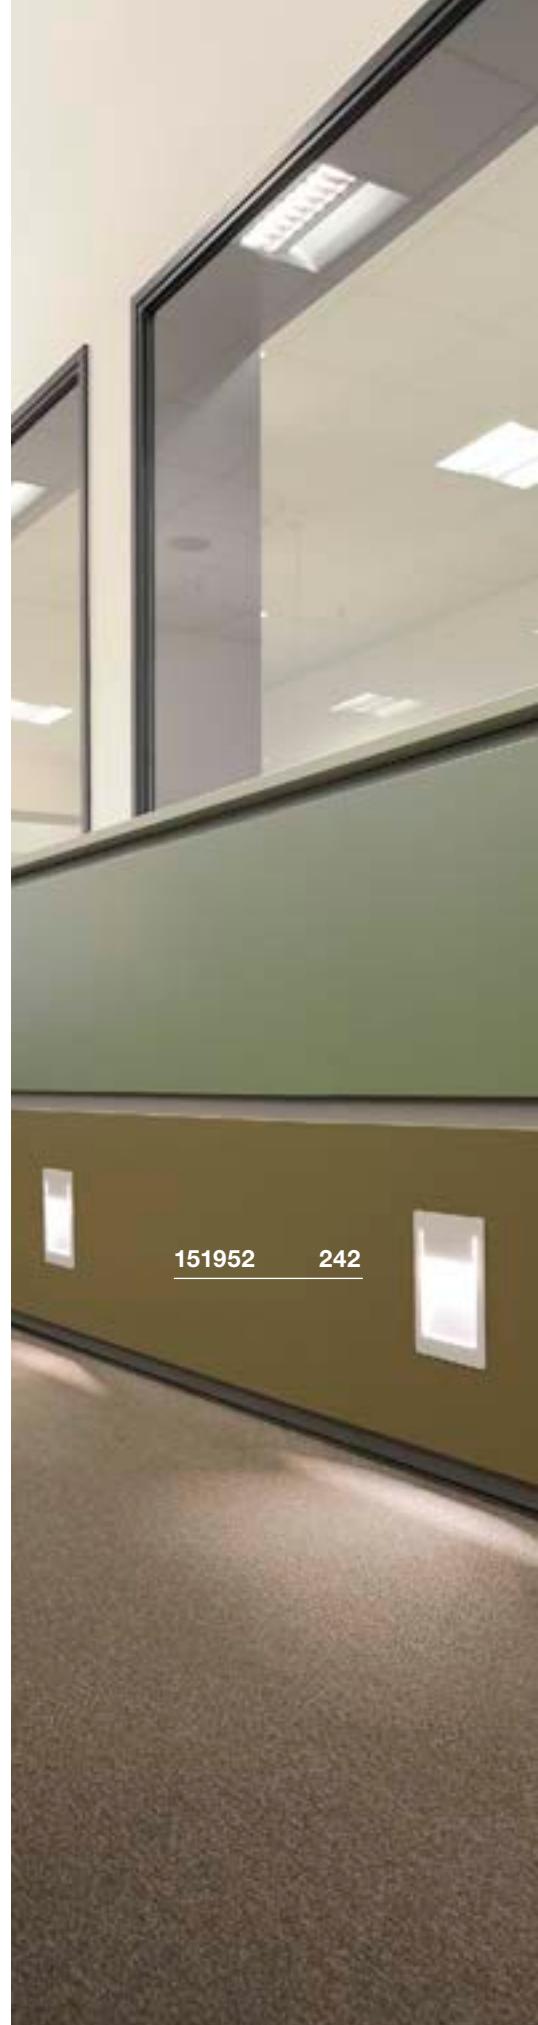

151952 242






MOBALA EL



WORO EL




LED PANEL 620x620mm




100-240V ~50/60Hz
Total wattage: 1.3W
Material: aluminium

- The mounting frame (1002984) or wall box (1002983) are required for assembly.
- Leaf springs



350mA
Total wattage: 1.2W
Material: steel

- When connecting several lights, make sure they are connected in series!
- This item is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets.
- Spring clips
- Open cable end



1050mA
Power consumption: 35W
Material: aluminium/polystyrene (PS)

- Open cable end



Down 14lm | 3000K



Down 50lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1002982


Options	Prod. no.
<input type="radio"/> white	1002922




Product	Prod. no.
LED driver 3W 350W	1005248



Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	1007227



Down 4000lm | 3000K 4000K




Options	Prod. no.
<input type="radio"/> white 3000K	1003073
<input type="radio"/> white 4000K	1003074




Product Prod. no.

Suspension kit 1.5m	
<input checked="" type="radio"/> chrome	158799
LED driver 40W 1050mA DALI dimmable with RF interface	
<input type="radio"/> white	1006197
LED driver 40W 1050mA dimmable inc. strain relief	
<input type="radio"/> white	464804
RF module for Dali driver	
<input type="radio"/> white	1006454
RF module for Dali driver	
<input type="radio"/> white	1006199

PATTA-I
EL, round, PHASE



PATTA-I
DL, square, PHASE



220-240V ~50/60Hz | 350mA

Total wattage: 7.3W

Material: aluminium/glass


- Spring clips Spring clips are included with the product.
- Material thickness of mounting surface: max. 20mm



Down

440lm | 1800-3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002098
<input type="radio"/> white	1002099
<input type="radio"/> aluminium	1002100



220-240V ~50/60Hz | 350mA

Total wattage: 7.3W

Material: aluminium/glass

- Spring clips Spring clips are included with the product.
- Material thickness of mounting surface: max. 20mm




Down

440lm | 1800-3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002101
<input type="radio"/> white	1002102



1002099 244

1002101 244


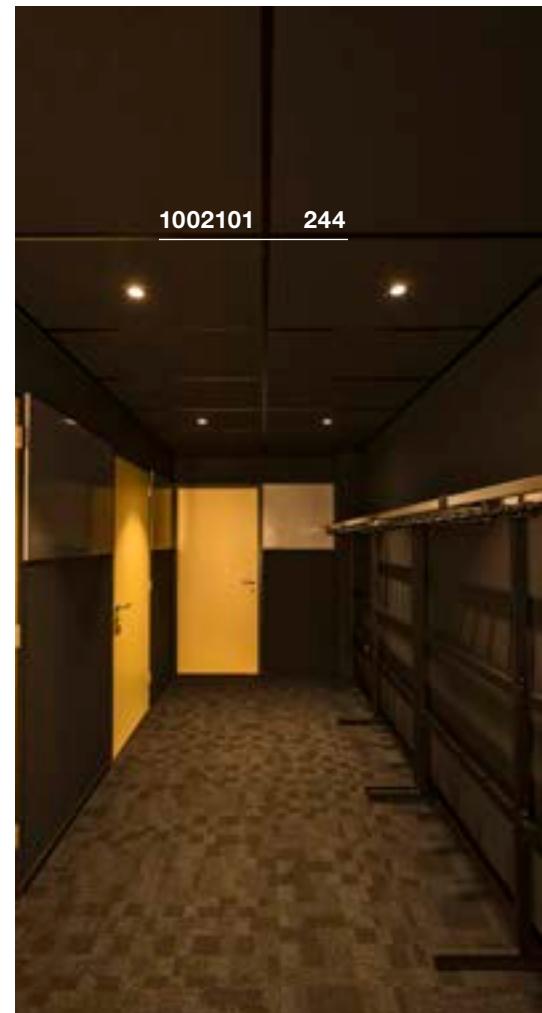




1002098 244

PATTA-I
EL, round, PHASE

114431 245

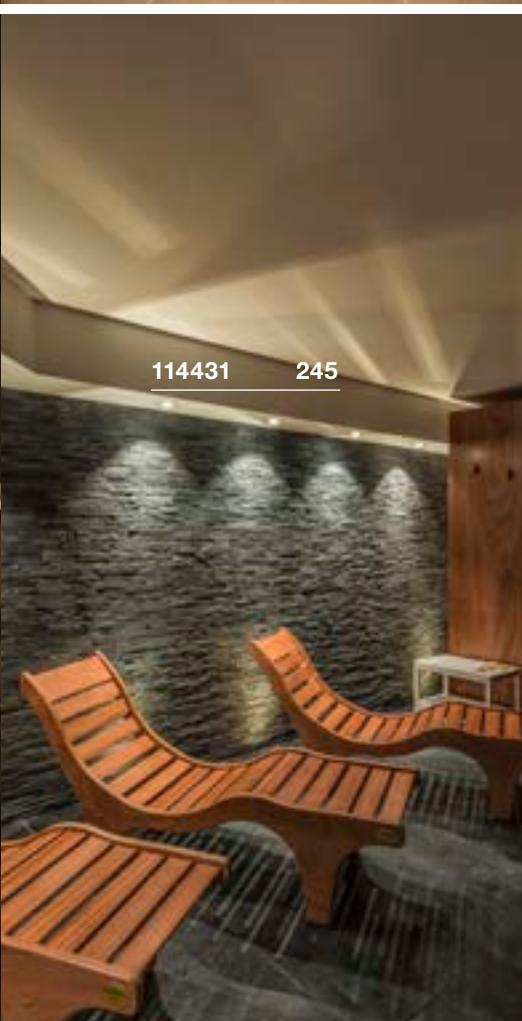

220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass


- Spring clips
- Material thickness of mounting surface: max. 25 mm



Down

910lm | 3000K

Options	Prod. no.
● black	114420
○ white	114421
● aluminium	114426



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 25 mm





Down

910lm | 3000K

Options	Prod. no.
● black	114430
○ white	114431
● aluminium	114436

PATTA-F
EL, round, PHASE



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm



CRI
80

Down



745lm | 3000K
860lm

Options	Prod. no.
<input checked="" type="radio"/> black 745lm	114440
<input type="radio"/> white 860lm	114441





114450 247

PATTA-F
 EL, square, PHASE


220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm

CRI
80

Down

745lm | 3000K
860lm
Options **Prod. no.**

<input checked="" type="radio"/> black	114450
<input type="radio"/> white	114451

113940

257






1007605 251





VARYT
CL, E14



220-240V ~50/60Hz
Material: aluminium

**SOCKET
INSIDE** <6 W

Base: 1xE14 Max. Ø: 3.8 cm L: 11 cm

Options	Prod. no.
● black	1007607
○ white	1007606
● chrome	1007604
● brass	1007605




C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285







1000692 253

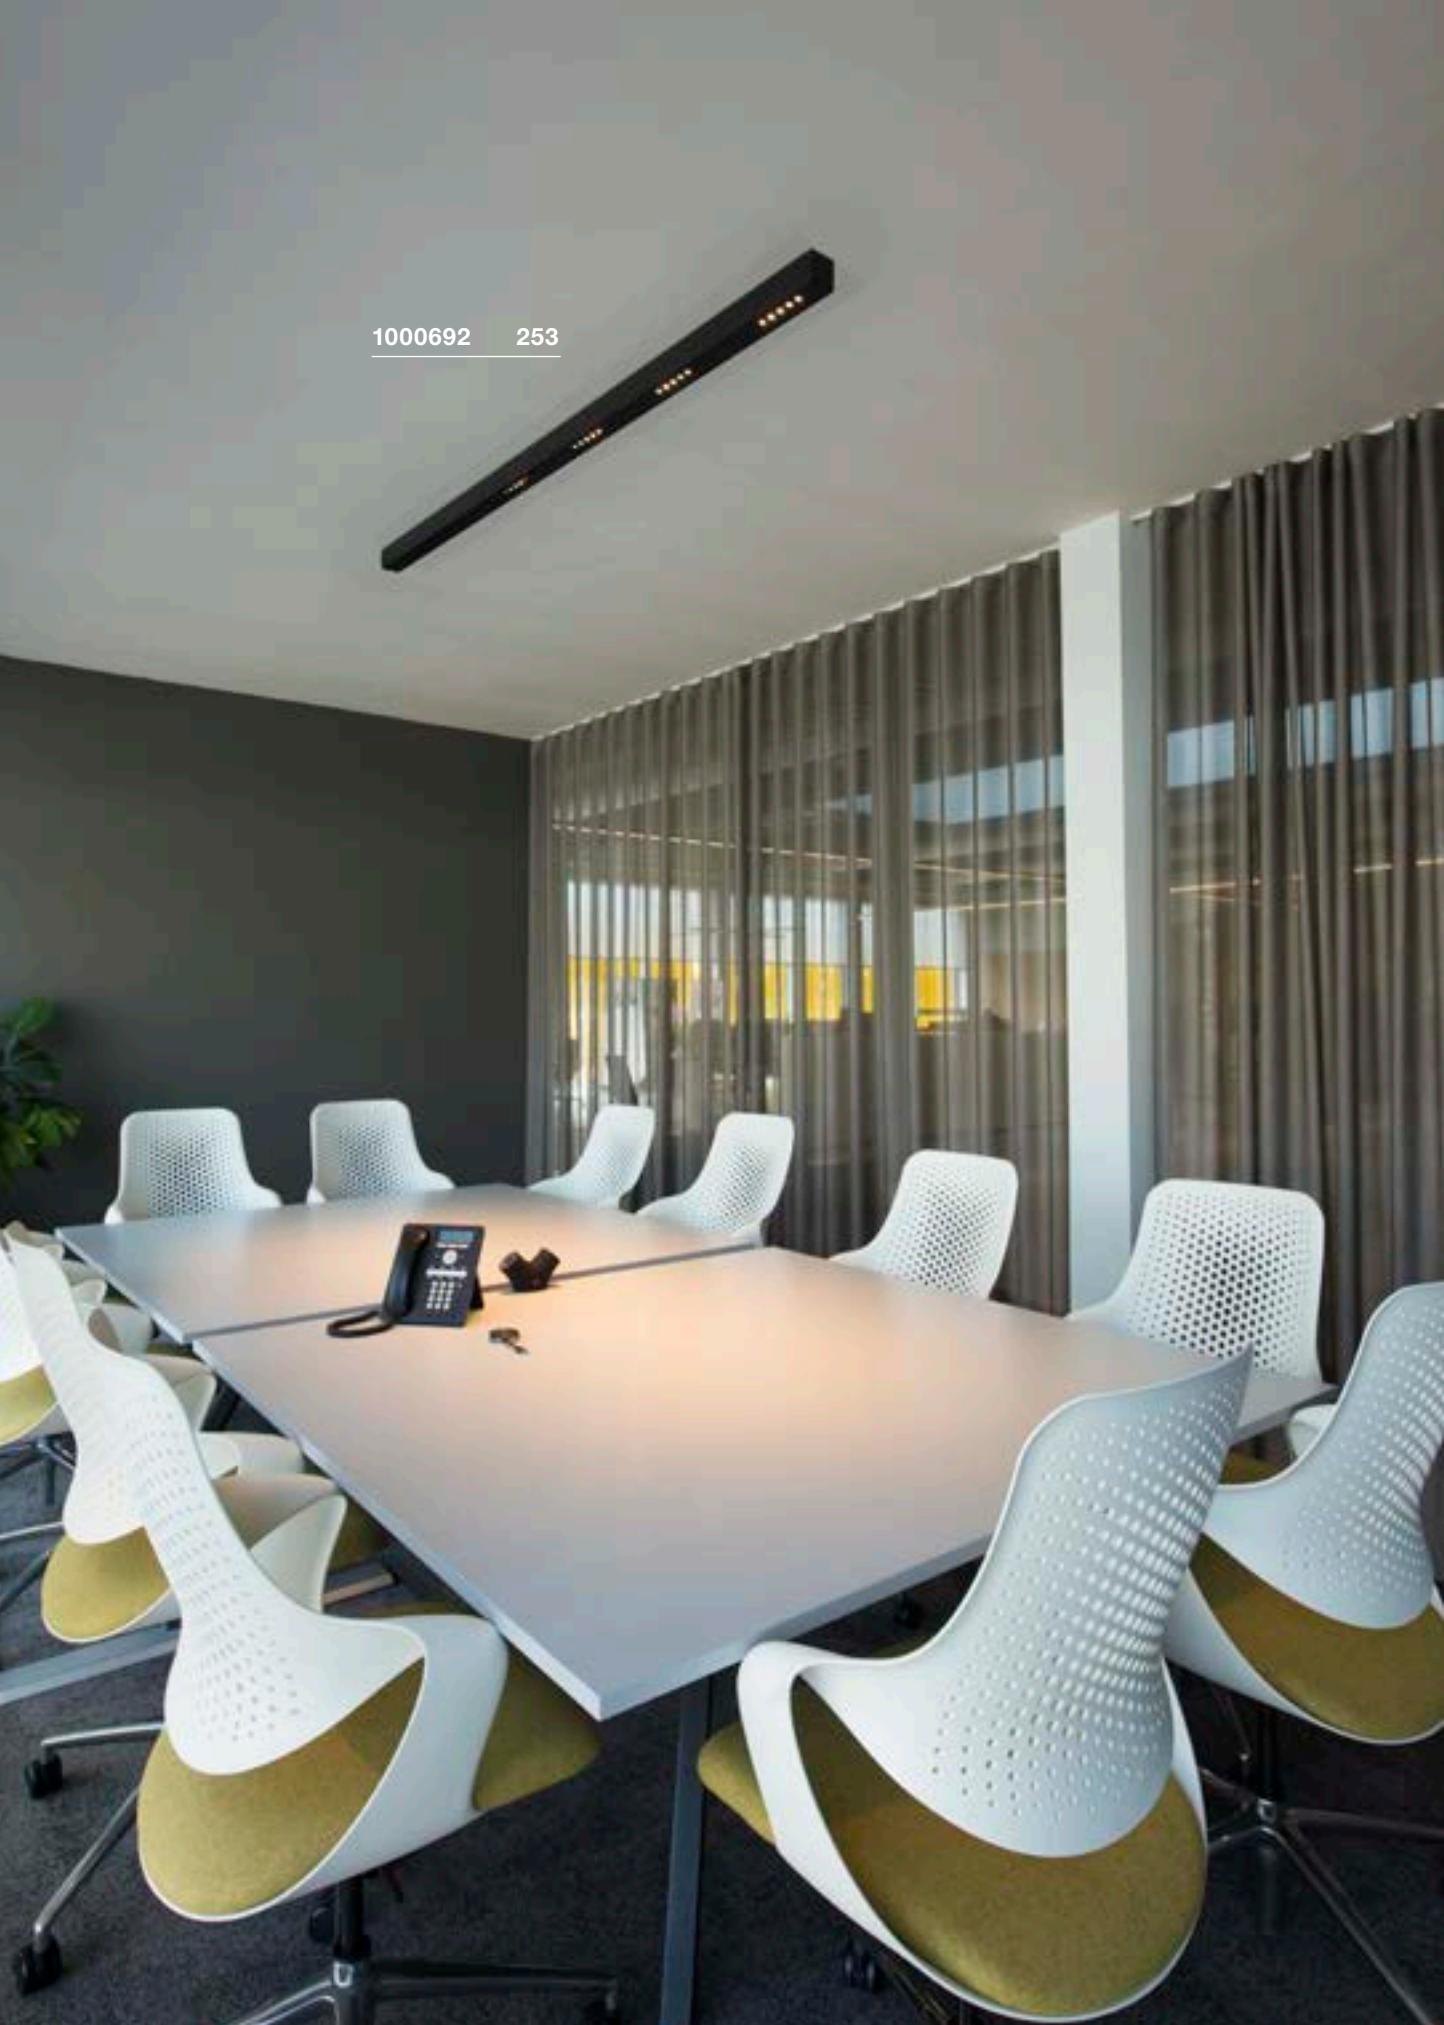



Q-LINE®
CL, 1m, BAP, PHASE

Q-LINE®
CL, 2m, BAP, PHASE



220-240V ~50/60Hz | 900mA

Total wattage: 46W

Material: aluminium/plastic

220-240V ~50/60Hz | 900mA

Total wattage: 93W

Material: aluminium/plastic



CRI
90

Down

2100lm | 3000K
2300lm | 4000K



CRI
90

Down

4200lm | 3000K
4600lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black 2100lm 3000K	1000686
<input type="radio"/> white 2100lm 3000K	1000685
<input checked="" type="radio"/> black 2300lm 4000K	1000689
<input type="radio"/> white 2300lm 4000K	1000688

Options	Prod. no.
<input checked="" type="radio"/> black 4200lm 3000K	1000692
<input type="radio"/> white 4200lm 3000K	1000691
<input checked="" type="radio"/> black 4600lm 4000K	1000695
<input type="radio"/> white 4600lm 4000K	1000694

1002004 255



1002011 255



1002005 255





TRILEDO

CL, single, square, QPAR51









TRILEDO

CL, double, square, QPAR51



TRILEDO

CL, single, round, QPAR51

220-240V ~50/60Hz
Material: aluminium220-240V ~50/60Hz
Material: aluminium220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <10 W

Base: 1xGU10 Max. Ø: 5.1 cm L: 5.5 cm

Options	Prod. no.
● black	1002013
○ white	1002015
● aluminium	1002004

SOCKET INSIDE <10 W

Base: 2xGU10 Max. Ø: 5.1 cm L: 5.5 cm

Options	Prod. no.
● black	1002005
○ white	1002006

SOCKET INSIDE <10 W

Base: 1xGU10 Max. Ø: 5.1 cm L: 5.5 cm

Options	Prod. no.
● black	1002010
○ white	1002011
● aluminium	1002012

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h
Prod. no.: 1005075

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h
Prod. no.: 1005077

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h
Prod. no.: 1005075


113940

257



113931

257

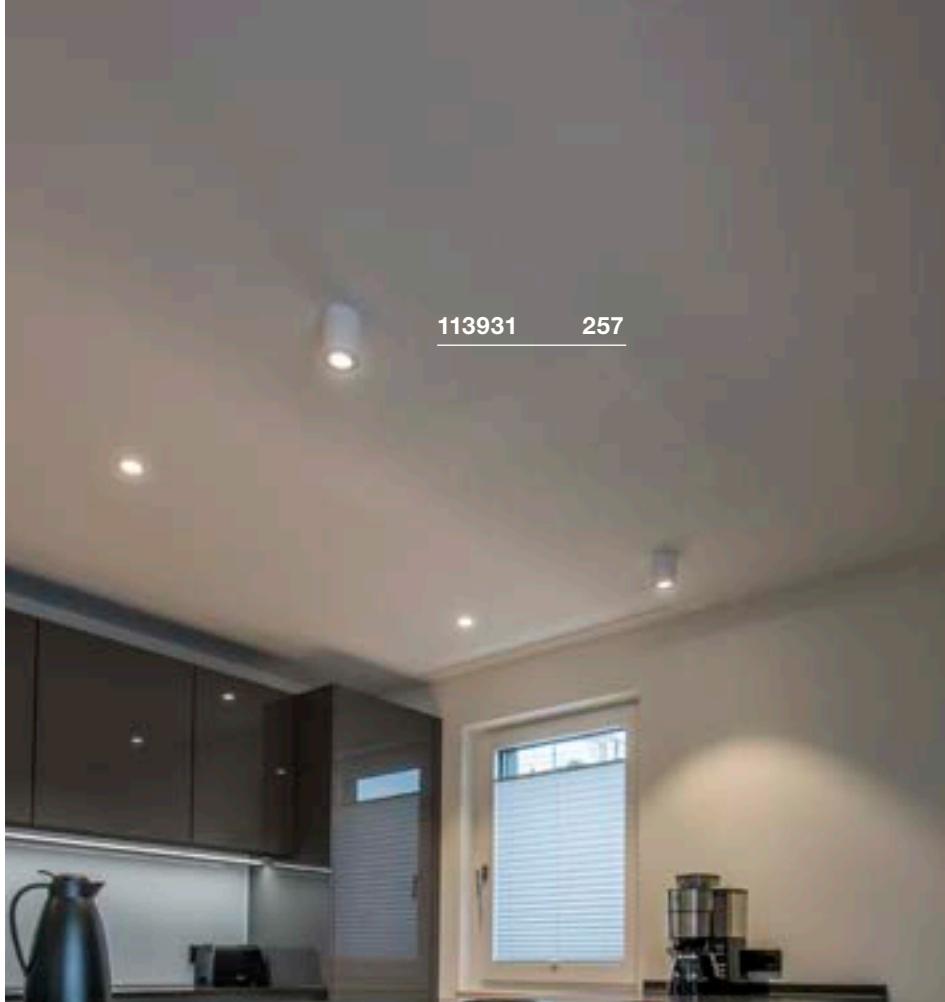

1002003

257









TRILEDO
CL, single, square



TRILEDO
CL, double, square



TRILEDO
CL, single, round



220-240V ~50/60Hz | 350mA

Total wattage: 7.6W

Material: aluminium/aluminium

220-240V ~50/60Hz | 350mA

Total wattage: 14W

Material: aluminium

220-240V ~50/60Hz | 350mA

Total wattage: 7.6W

Material: aluminium/aluminium



Down

640lm | 3000K



Down

1300lm | 3000K



Down



640lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	113940
<input type="radio"/> white	113941

Options	Prod. no.
<input checked="" type="radio"/> black	1002003
<input type="radio"/> white	1002008

Options	Prod. no.
<input checked="" type="radio"/> black	113930
<input type="radio"/> white	113931

OCULUS CL, PHASE



220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/glass

- Additional frosted lens included



CRI
90

Down 36lm | 2000K - 780lm | 3000K


Options	Prod. no.
<input checked="" type="radio"/> black	1004666
<input type="radio"/> white	1004667




ENOLA B
CL, QPAR51

ENOLA C
CL


220-240V ~50/60Hz
Material: aluminium



220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium



Base: 1xGU10

max. L: 8.5 cm



Down

1020lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	151810
<input type="radio"/> white	151811

Options	Prod. no.
<input type="radio"/> white	152101

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**




Product	Prod. no.
Decorative ring <input checked="" type="radio"/> black	151840




1002936 261



1002965 261

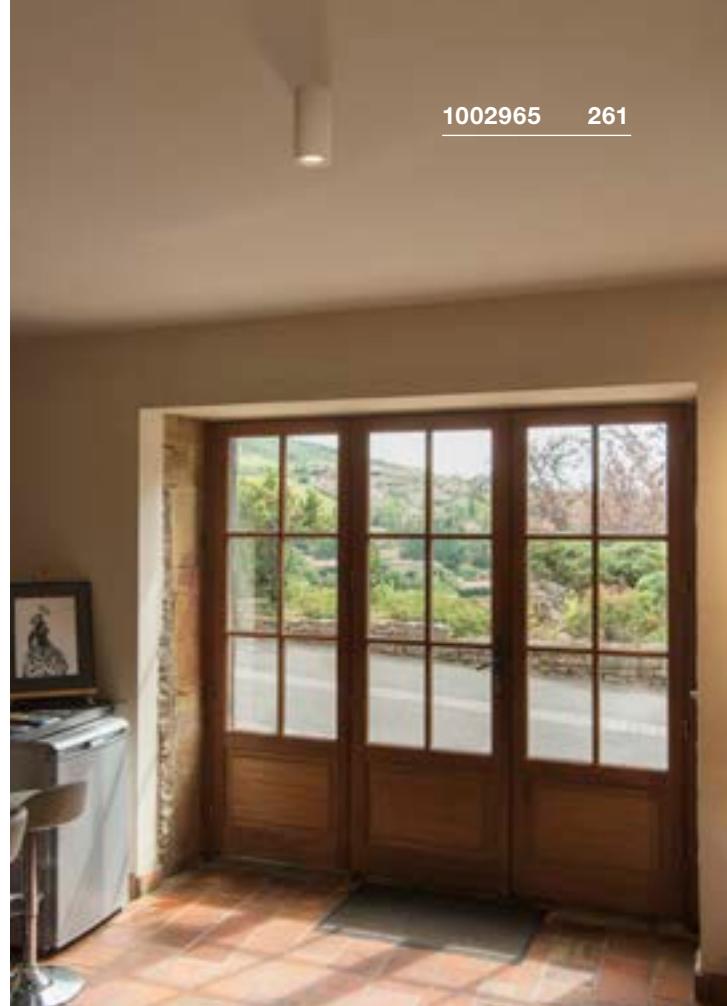

1000808 261

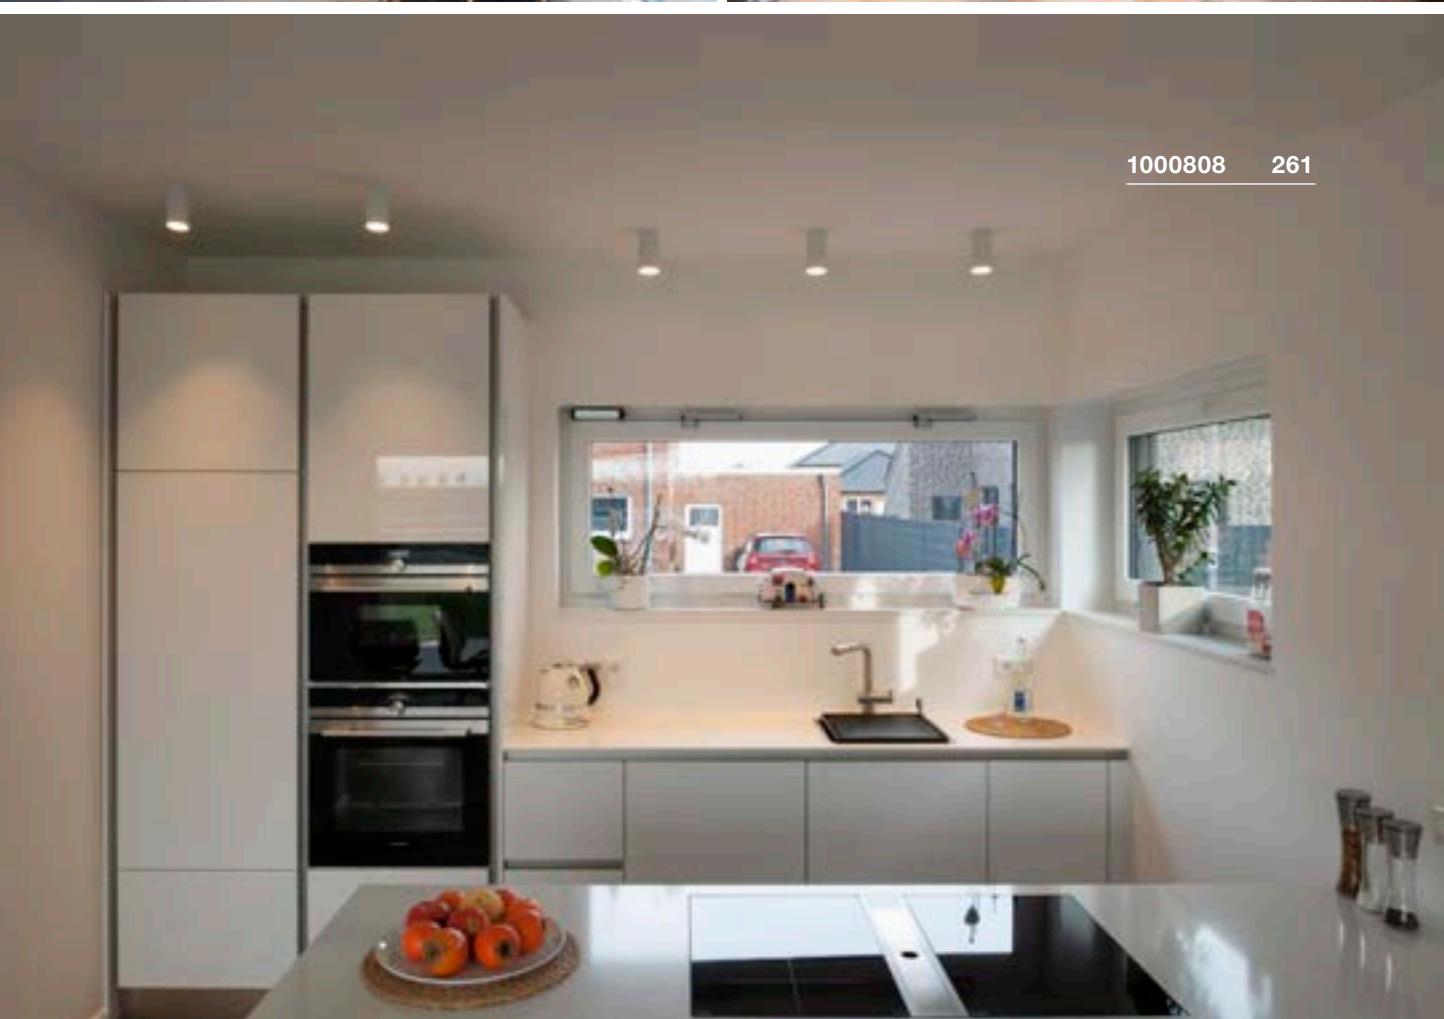







ASTINA
CL, QPAR51




NAGY 75
CL, QPAR51




ANELA
CL, PHASE



220-240V ~50/60Hz
Material: aluminium



220-240V ~50/60Hz
Material: plaster



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



Base: 1xGU10



Base: 1xGU10



220lm | 3000K | 750lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002936
<input type="radio"/> white	1002934

Options	Prod. no.
<input type="radio"/> white	1002965

Options	Prod. no.
<input checked="" type="radio"/> black	1000807
<input type="radio"/> white	1000808



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005075



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h




Prod. no.: 1005273



Product	Prod. no.
Reflector 28°	
<input checked="" type="radio"/> black	1000811
<input type="radio"/> white	1000812
<input checked="" type="radio"/> gold	1000809
<input type="radio"/> grey	1000810

OCCULDAS 13
CL, indirect, PHASE



220-240V ~50/60Hz | 350mA
IP 20 IK02 120° L70B50


220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium



Down 810lm | 3000K

Options	Prod. no.
<input type="radio"/> white	117351

OCCULDAS 23
CL, indirect, PHASE



220-240V ~50/60Hz | 700mA
IP 20 120° L70B50


220-240V ~50/60Hz | 700mA
Total wattage: 24 W
Material: aluminium/steel



Down 1500lm | 3000K

Options	Prod. no.
<input type="radio"/> white	117321

117321 262

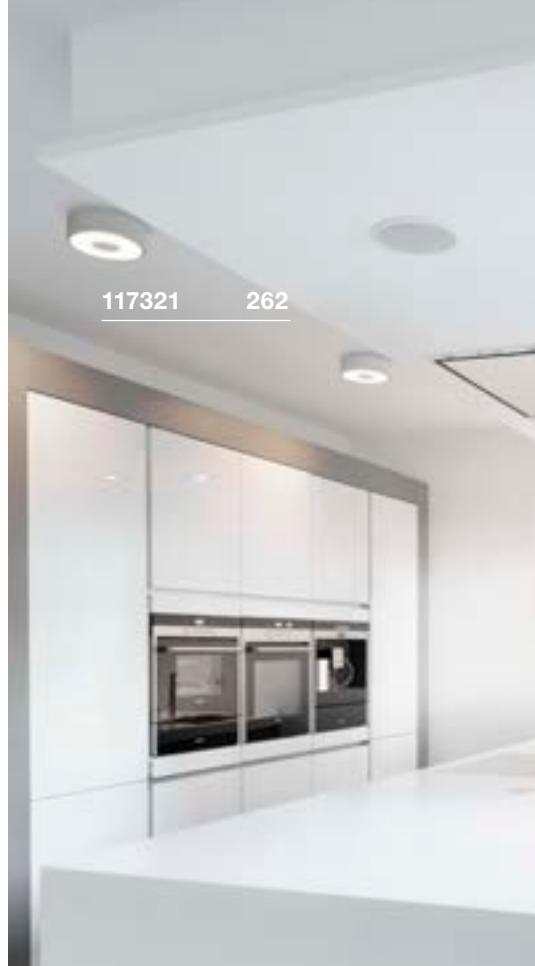

1002216 263





ALTRA DICE
CL, QPAR51




ALTRA DICE
CW, double, QPAR51



1002215 263



220-240V ~50/60Hz
Material: aluminium/steel



220-240V ~50/60Hz
Material: aluminium/steel



Base: 1xGU10

Options	Prod. no.
● black	1002216
○ white	151511
● grey/black	151514



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Base: 2xGU10

Options	Prod. no.
● black	1002215
○ white	151531
● grey	151534



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**



117101

265







KARDAMOD
CL, single, square, QPAR111

KARDAMOD
CL, double, square, QPAR111

117110 265



220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <75 W

Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	117100
<input type="radio"/> white	117101



QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h

Prod. no.: **1005276**



220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <75 W

Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	117110
<input type="radio"/> white	117111



QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h



Prod. no.: **1005274**



FENDA
Ceiling rosette, E27



155551 + 1004775 266 + 267



220-240V ~50/60Hz
Material: steel

SOCKET INSIDE <60 W

Base: 1XE27

Options	Prod. no.
<input checked="" type="radio"/> black	155550
<input type="radio"/> white	155551



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005268





FENDA
30 cm, round



H: 20 cm
Diameter: 30 cm
Material: textile/steel

FENDA
Ø 45 cm, round



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

FENDA
Ø 70 cm, round



H: 36 cm
Diameter: 70 cm
Material: textile/steel

- Not suitable for Fenda Bow.


Options	Prod. no.
<input checked="" type="radio"/> black/copper	155592
<input type="radio"/> white	155582
<input checked="" type="radio"/> grey	1004774
<input type="radio"/> beige	155583

Options	Prod. no.
<input checked="" type="radio"/> black/copper	156122
<input type="radio"/> white	156111
<input checked="" type="radio"/> grey	1004775
<input type="radio"/> beige	156113

Options	Prod. no.
<input checked="" type="radio"/> black/copper	1000580
<input type="radio"/> white	1000579

156050 **268**

TENORA
CL, E27



220-240V ~50/60Hz
Material: steel/textile

SOCKET INSIDE <23 W

Base: 3XE27 max. L: 14.8 cm

Options	Prod. no.
<input checked="" type="radio"/> black	156050
<input type="radio"/> white	156051



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h





Prod. no.: **1005302**



SOPRANA
CL, E27

155373 269



220-240V ~50/60Hz
Material: steel/textile

SOCKET
INSIDE <60
W

Base: 3XE27

Options	Prod. no.
● beige	155373



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h




Prod. no.: 1005303

148004 **270**



PLASTRA
CL, QPAR51



148005 **271**



220-240V ~50/60Hz
Material: plaster/steel

**SOCKET
INSIDE** **<35
W**

Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	148004





 LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077




**PLASTRA
CL, PHASE**

**PLASTRA 105
CL, E27**

**PLASTRA 104
CL, E27**


220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: plaster/glass



Down

990lm | 3000K



220-240V ~50/60Hz
Material: plaster/glass



Base: 2xE27

Max. Ø: 5.1 cm

L: 14 cm



220-240V ~50/60Hz
Material: plaster/glass



Base: 2xE27

Max. Ø: 5.1 cm

L: 14 cm

Options	Prod. no.
<input type="radio"/> white	148005

Options	Prod. no.
<input type="radio"/> white / transparent	148001

Options	Prod. no.
<input type="radio"/> white / transparent	148001

Options	Prod. no.
<input type="radio"/> white / transparent	148002





LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: **1005290**

LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: **1005290**

FERA 25
CL, DALI





220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: polycarbonate (PC)/
poly (methyl methacrylate) (PMMA)



Down 1580lm | 3000K | 1650lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002968
<input type="radio"/> white	1002967

FERA 25
CL




220-240V ~50/60Hz | 550mA
Total wattage: 23W
Material: aluminium/polystyrene (PS)





Down 1800lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1001939
<input type="radio"/> white	161461

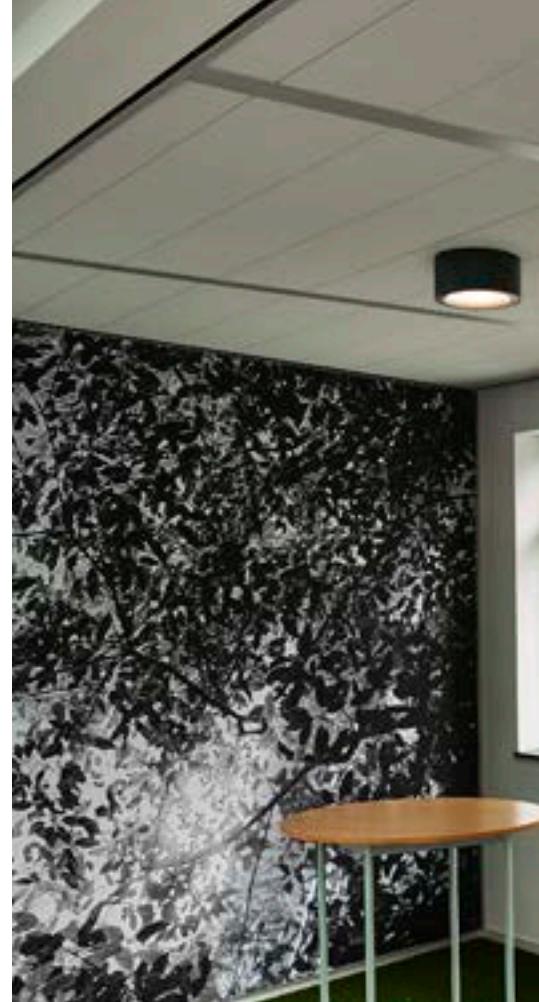




1001939 272

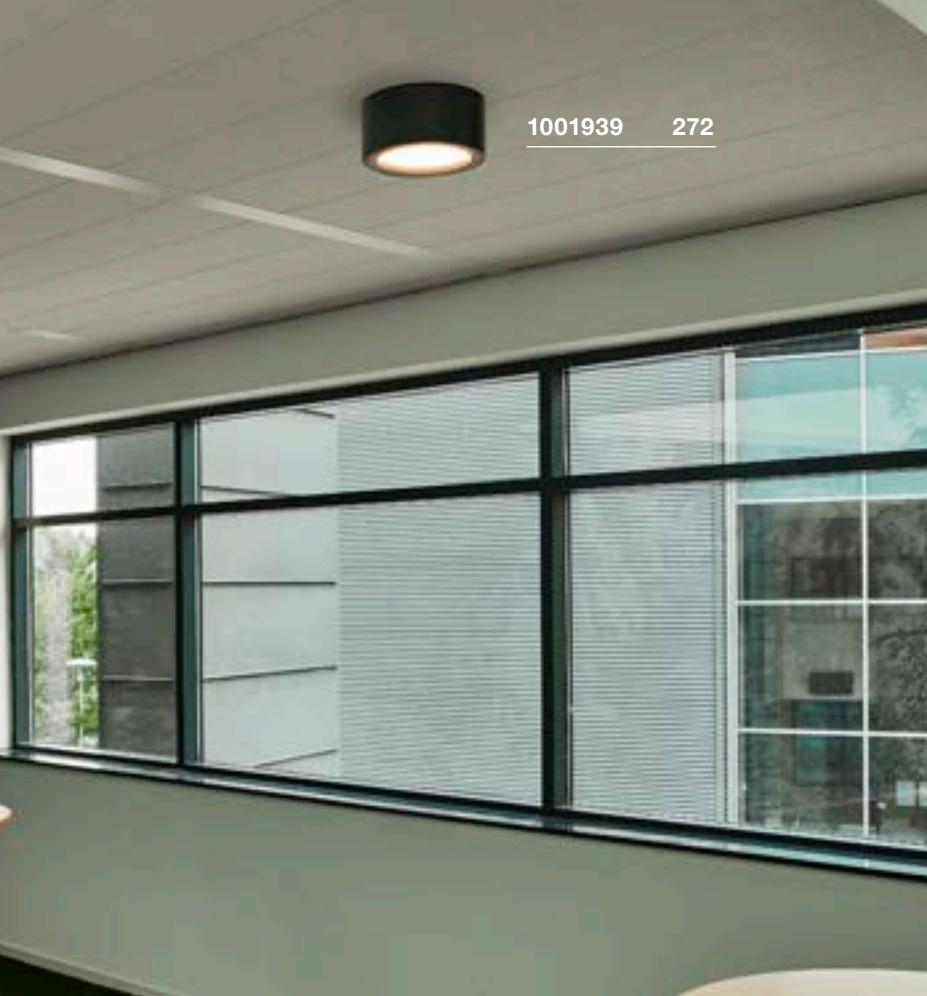MARONA
CL, PHASE

155156 273



200-240V ~50/60Hz | 430mA
 Total wattage: 15W
 Material: poly (methyl methacrylate)
 (PMMA)/steel

CRI
80



Down

1200lm | 3000K

Options	Prod. no.
● grey	155156

1000785 **274**

PANEL 60
CL, round, PHASE



220-240V ~50/60Hz | 1000mA

Total wattage: 42W

Material: aluminium/
poly (methyl methacrylate) (PMMA)



Down

3150lm | 3000K
3350lm | 4000K

Options **Prod. no.**

white **1000783**

3150lm | 3000K

white **1000784**

3350lm | 4000K

grey **1000785**

3150lm | 3000K

grey **1000786**





3350lm | 4000K



PANEL
CL, 1200x300mm, PHASE

PANEL 60
CL, round, DALI


PANEL
CL, 1200x300mm, DALI



220-240V ~50/60Hz | 1000mA


Total wattage: 45W

Material: aluminium/plastic



120-277V ~50/60Hz | 1000mA

Total wattage: 43W

Material: aluminium/
poly (methyl methacrylate) (PMMA)

120-277V ~50/60Hz | 1000mA


Total wattage: 43W

Material: aluminium/
poly (methyl methacrylate) (PMMA)Down 3100lm | 3000K
3400lm | 4000KDown 3150lm | 3000K
3350lm | 4000KDown 3100lm | 3000K
3400lm | 4000K

Options	Prod. no.
<input type="radio"/> white 3100lm 3000K CRI80 1001505	
<input type="radio"/> white 3400lm 4000K CRI80 1001506	
<input checked="" type="radio"/> grey 3100lm 3000K CRI80 1001508	
<input checked="" type="radio"/> grey 3400lm 4000K CRI90 1001509	

Options	Prod. no.
<input type="radio"/> white 3150lm 3000K 1003040	
<input type="radio"/> white 3350lm 4000K 1003041	
<input checked="" type="radio"/> grey 3150lm 3000K 1003042	
<input checked="" type="radio"/> grey 3350lm 4000K 1003043	

Options	Prod. no.
<input type="radio"/> white 3100lm 3000K 1003052	
<input type="radio"/> white 3400lm 4000K 1003053	
<input checked="" type="radio"/> grey 3100lm 3000K 1003054	
<input checked="" type="radio"/> grey 3400lm 4000K 1003055	

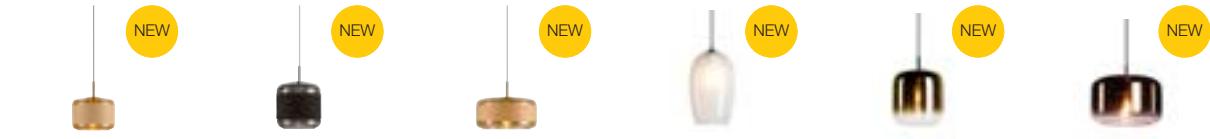



FENDA 297	LED HELIA AMBIENT 35 300	LED HELIA AMBIENT 35 300	LED HELIA 30 301	LED HELIA 30 301	LED HELIA 40 303
LED HELIA 40 303	SOCKET ASTINA 305	SOCKET ENOLA B 305	SOCKET ENOLA 305	LED ANELA 306	SOCKET LISENNE 306
SOCKET TONGA® 307	SOCKET QUADRASS 307	SOCKET PARA CONE GL 309	SOCKET PARA CONE 20 309	SOCKET PARA CONE 30 309	SOCKET PHELIA 10 310
SOCKET PHELIA 20 311	SOCKET PHELIA 25 311	SOCKET PHELIA 30 311	SOCKET FORCHINI 50 312	SOCKET FORCHINI 70 312	SOCKET FORCHINI M 40 313
SOCKET FORCHINI M 50 313	SOCKET LIGHT EYE® 90 314	SOCKET LIGHT EYE® 150 314	SOCKET SUN / BIG SUN 315	SOCKET ROTOBALL 25 317	SOCKET ROTOBALL 40 317
SOCKET ROTOBALL 50 317	SOCKET PARA DOME 318	SOCKET PARA DOME 318	SOCKET PARA DOME 318	SOCKET PARA 380 319	

1007588 279



1007599 279



1007597 279







PANTILO ROPE 19 PD, E27



NEW



200-240V ~50/60Hz
Material: glass/steel/hemp

- Open cable end



Base: 1xE27

Max. Ø: 10 cm | L: 11 cm

Options	Prod. no.
● amber/gold	1007597
● anthracite/silver	1007596



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



Base: 1xE27 | Max. Ø: 10 cm | L: 18 cm

Options	Prod. no.
● amber/gold	1007589
● anthracite/silver	1007588



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



Base: 1xE27 | Max. Ø: 15 cm | L: 11 cm

Options	Prod. no.
● amber/gold	1007599
● anthracite/silver	1007598



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305





Product	Prod. no.
1-phase adapter	
● black	143120
○ white	143121
● grey	143124
3-phase light adapter	
● black	145990
● grey	145994
○ white	1001542
Fitu single ceiling rose, round	
● black	132600
○ white	132601
● gold	1002163
● chrome	132605

1006403 281





PANTILO OVAL PD, E27



200-240V ~50/60Hz
Material: glass

- Open cable end



Base: 1xE27

Options	Prod. no.
<input type="radio"/> white	1006402
<input checked="" type="radio"/> gold	1006403
<input type="radio"/> chrome	1006398
<input type="radio"/> copper	1006400



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h





Prod. no.: 1005305



Product	Prod. no.
1-phase adapter	
<input checked="" type="radio"/> black	143120
<input type="radio"/> white	143121
<input type="radio"/> grey	143124
3-phase light adapter	
<input checked="" type="radio"/> black	145990
<input type="radio"/> grey	145994
<input type="radio"/> white	1001542
Surface-mounted ceiling rose	
<input checked="" type="radio"/> black	1004744
<input type="radio"/> white	1004745
<input type="radio"/> chrome	1004746
FITU single ceiling rose	
<input type="radio"/> white	132601
<input checked="" type="radio"/> gold	1002163
FITU single ceiling rose, round	
<input checked="" type="radio"/> black	132600
<input type="radio"/> chrome	132605

PANTILO 20 PD, E27



200-240V ~50/60Hz
Material: glass

- Open cable end



Base: 1xE27

Options	Prod. no.
<input type="radio"/> white	1006396
<input checked="" type="radio"/> gold	1006395
<input type="radio"/> chrome	1003004
<input type="radio"/> copper	1003005



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h





Prod. no.: 1005305



Product	Prod. no.
1-phase adapter	
<input checked="" type="radio"/> black	143120
<input type="radio"/> white	143121
<input type="radio"/> grey	143124
3-phase light adapter	
<input checked="" type="radio"/> black	145990
<input type="radio"/> grey	145994
<input type="radio"/> white	1001542
FITU single ceiling rose	
<input type="radio"/> white	132601
<input checked="" type="radio"/> gold	1002163
FITU single ceiling rose, round	
<input checked="" type="radio"/> black	132600
<input type="radio"/> chrome	132605

PANTILO 28 PD, E27



200-240V ~50/60Hz
Material: glass

- Open cable end



Base: 1xE27

Options	Prod. no.
<input type="radio"/> white	1006399
<input checked="" type="radio"/> gold	1006397
<input type="radio"/> chrome	1003006
<input type="radio"/> copper	1003007



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h



Prod. no.: 1005305



Product	Prod. no.
1-phase adapter	
<input checked="" type="radio"/> black	143120
<input type="radio"/> white	143121
<input type="radio"/> grey	143124
3-phase light adapter	
<input checked="" type="radio"/> black	145990
<input type="radio"/> grey	145994
<input type="radio"/> white	1001542
FITU single ceiling rose	
<input type="radio"/> white	132601
<input checked="" type="radio"/> gold	1002163
FITU single ceiling rose, round	
<input checked="" type="radio"/> black	132600
<input type="radio"/> chrome	132605





1003443 283



PANTILLO CONVEX 29 PD, E27

1003444 **283**



220-240V ~50/60Hz
Material: glass/steel

- Open cable end



Base: E27 Max. Ø: 10 cm L: 20 cm



Options	Prod. no.
● chrome	1003443

A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h
Prod. no.: 1005305



Product	Prod. no.
1-phase adapter	
● black	143120
○ white	143121
● grey	143124
3-phase light adapter	
● black	145990
● grey	145994
○ white	1001542
FITU single ceiling rose	
○ white	132601
● gold	1002163
FITU single ceiling rose, round	
● black	132600
● chrome	132605

PANTILLO CONVEX 40 PD, E27



220-240V ~50/60Hz
Material: glass/steel



Base: E27 Max. Ø: 15 cm L: 30 cm

Options	Prod. no.
● chrome	1003444

A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h
Prod. no.: 1005305






1006438 285



ASTO TUBE



220-240V ~50/60Hz
Material: aluminium




Base: 1xGU10




LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEEK=G
6kWh/1000h

Prod. no.: 1005273

ASTO TUBE PD, single, GU 10



ASTO TUBE PD, double, GU 10




ASTO TUBE Decorative reflector




H: 3.95 cm
Diameter: 6.75 cm
Material: polycarbonate (PC)

ASTO TUBE PD, triple, GU 10



ASTO TUBE PD, quadruple, GU 10



Options	Prod. no.
<input checked="" type="radio"/> black/chrome	1007190
<input type="radio"/> gold	1006450
<input type="radio"/> chrome	1006449
<input type="radio"/> copper	1006451

Options	Prod. no.
<input checked="" type="radio"/> black	1006435
<input type="radio"/> white	1006436



Options	Prod. no.
<input checked="" type="radio"/> black	1006437
<input type="radio"/> white	1006438

1007472 287





WORKLIGHT PRO 120 PD, DALI

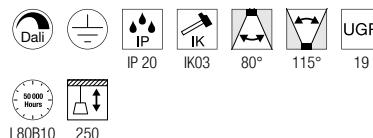

200-240V ~50/60Hz | 1200mA
Total wattage: 50W
Material: aluminium/steel





CRI
80

Up 2800lm | 4000K
Down 3300lm

Options	Prod. no.
● black	1007468
○ white	1007469
● grey	1007470

WORKLIGHT PRO 150 PD, DALI



200-240V ~50/60Hz | 1400mA
Total wattage: 59W
Material: aluminium/steel



CRI
80



Up 3300lm | 4000K
Down 3900lm

Options	Prod. no.
● black	1007471
○ white	1007472
● grey	1007473

WORKLIGHT PD, DALI



NEW

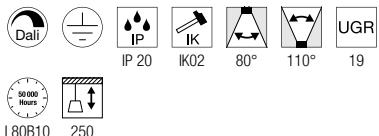

Up Down

2000lm | 3000lm

4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1005395
<input type="radio"/> white	1005396
<input type="radio"/> silver	1006345




1006345 288




1001344 289


I-PENDANT PRO
PD, 1195x295mm, DALI

PANEL 60
PD, round, DALI


120-277V ~50/60Hz | 1000mA
 Total wattage: 43W
 Material: aluminium/
 poly (methyl methacrylate) (PMMA)



120-277V ~50/60Hz | 1000mA
 Total wattage: 43W
 Material: aluminium/
 poly (methyl methacrylate) (PMMA)



CRI 80

Down 3750lm | 3000K
 3800lm | 4000K





CRI 80

Down 3150lm | 3000K
 3350lm | 4000K

Options	Prod. no.
<input type="radio"/> white 3750lm 3000K	1003048
<input type="radio"/> white 3800lm 4000K	1003049
<input checked="" type="radio"/> grey 3750lm 3000K	1003050
<input checked="" type="radio"/> grey 3800lm 4000K	1003051

Options	Prod. no.
<input type="radio"/> white 3150lm 3000K	1003044
<input type="radio"/> white 3350lm 4000K	1003045
<input checked="" type="radio"/> grey 3150lm 3000K	1003046
<input checked="" type="radio"/> grey 3350lm 4000K	1003047

NOYA
PD, PHASE



220-240V ~50/60Hz | 700mA
Total wattage: 32W
Material: aluminium/polycarbonate (PC)



CRI
90

Down 1861lm | 2700K | 2025lm | 3000K


Options	Prod. no.
<input checked="" type="radio"/> black	1003530
<input type="radio"/> white	1003532






GLENOS®
PD, 1m, 1-10V


1001403 291

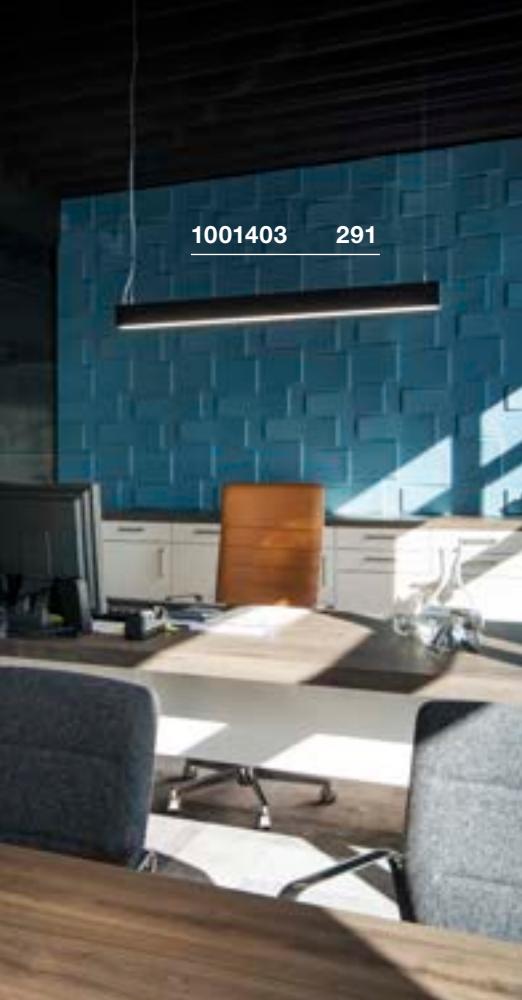

GLENOS®
PD, 2m, 1-10V

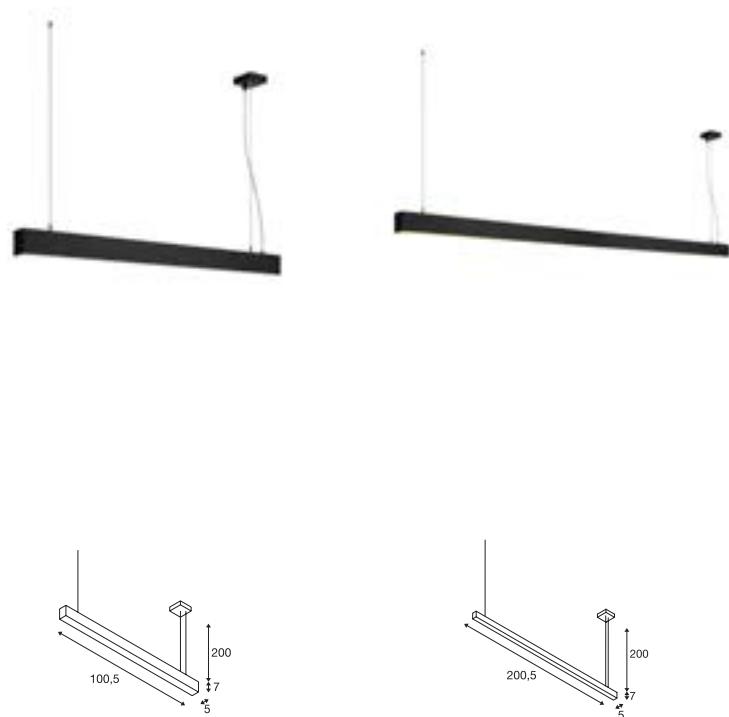


1001409 291



220-240V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/plastic



Down 2850lm | 3000K
3300lm | 4000K



220-240V ~50/60Hz | 1000mA
Total wattage: 85W
Material: aluminium/plastic



Down 5700lm | 3000K
6600lm | 4000K

Options


- black
2850lm | 3000K **1001400**
- black
3300lm | 4000K **1001403**

Prod. no.


Options

- black
5700lm | 3000K **1001406**
- black
6600lm | 4000K **1001409**

1000933 293

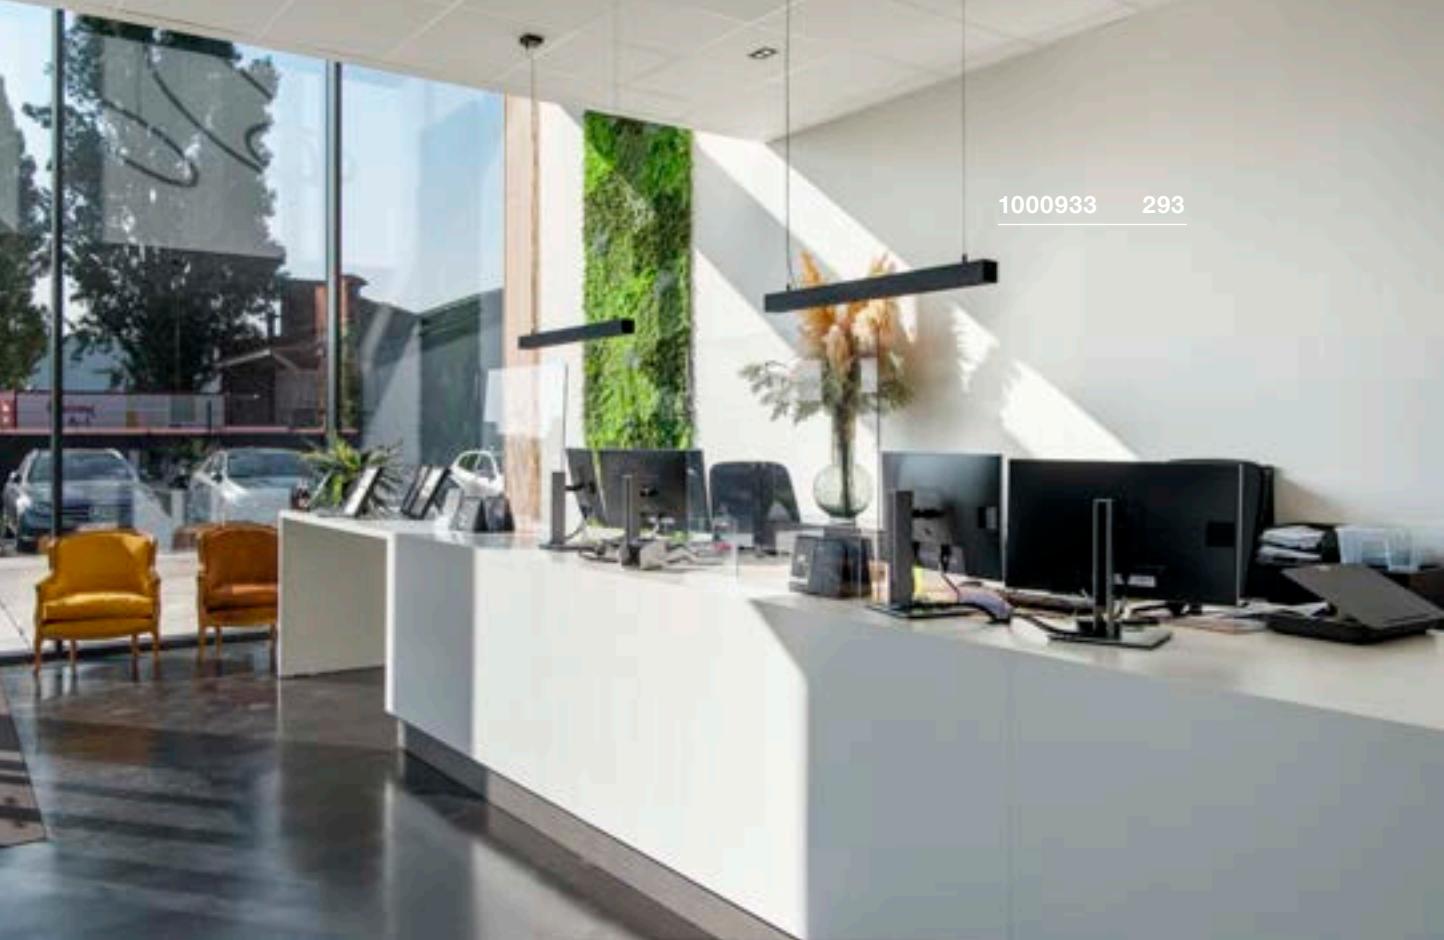

1000927 293

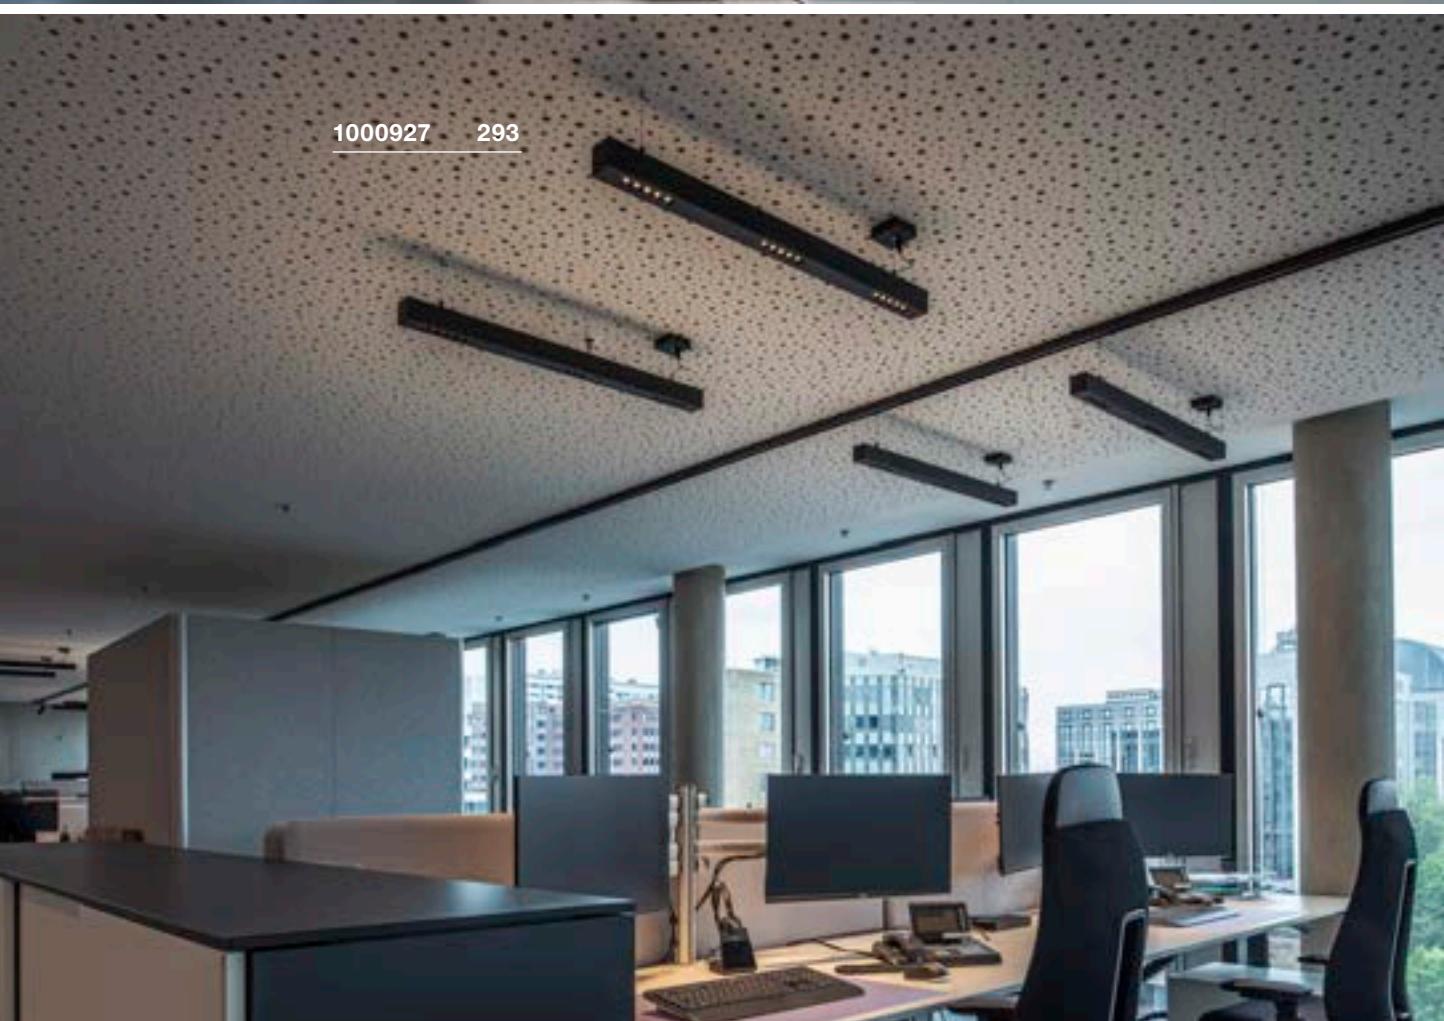









Q-LINE®
PD, 1m, BAP, PHASE



Q-LINE®
PD, 2m, BAP, PHASE



Q-LINE®
PD, DALI, single



220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic

220-240V ~50/60Hz | 700mA
Total wattage: 47W
Material: aluminium/acrylic



CRI 90

Down 2100lm | 3000K
2300lm | 4000K



CRI 90

Down 4200lm | 3000K
4600lm | 4000K



CRI 80



Down 3700lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black 2100lm 3000K	1000927
<input checked="" type="radio"/> black 2300lm 4000K	1000933
<input type="radio"/> white 2100lm 3000K	1000926
<input type="radio"/> white 2300lm 4000K	1000932

Options	Prod. no.
<input checked="" type="radio"/> black 4200lm 3000K	1000930
<input checked="" type="radio"/> black 4600lm 4000K	1000936
<input type="radio"/> white 4200lm 3000K	1000929
<input type="radio"/> white 4600lm 4000K	1000935

Options	Prod. no.
<input checked="" type="radio"/> black	1001309
<input type="radio"/> white	1001310

OCULUS PD, single, PHASE



220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/glass


- Additional frosted lens included
- Matching accessories can be found on page 295
- Open cable end



CRI
90



Down 36lm | 2000K - 780lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1004672
<input type="radio"/> white	1004673

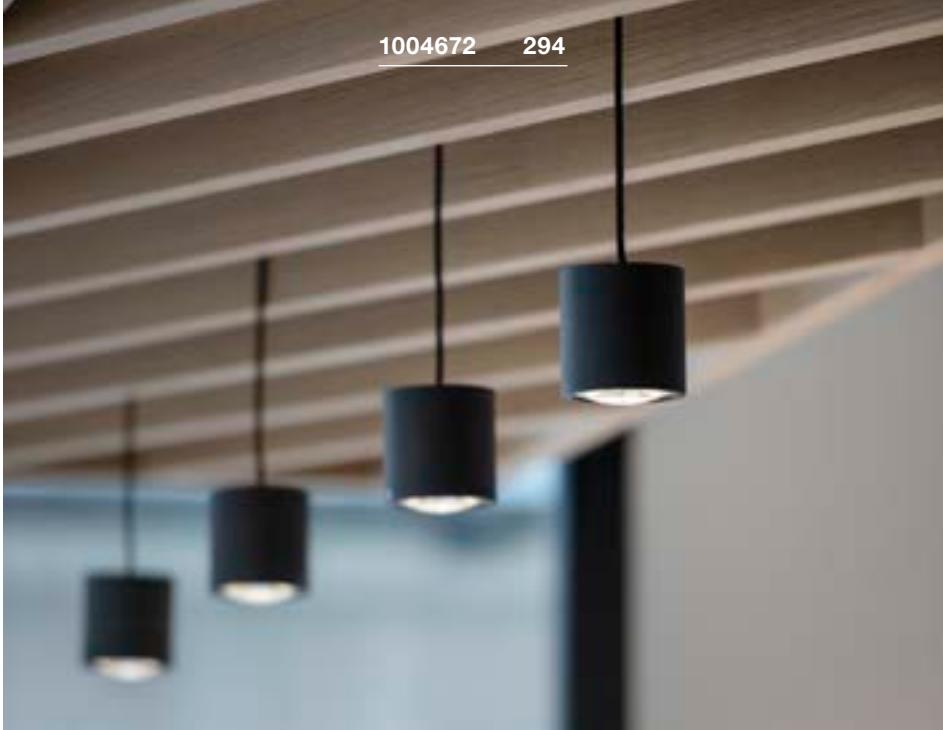

1004672 294

132690 295


FITU
PD, E27


220-240V ~50/60Hz
Material: aluminium

- Textile cable
- Matching accessories can be found on page 295
- Open cable end



Base: 1xE27

Options	Prod. no.
<input checked="" type="radio"/> black	132690
<input type="radio"/> white	132691



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303

Fitu single ceiling rose, round

16A max.
Steel
H: 3.9 cm
Diameter: 8.5 cm
Strain relief included


Ceiling hook

Aluminium
L: 4.6 cm
Diameter: 1.8 cm


Options Prod. no.

<input checked="" type="radio"/> black	132600
<input type="radio"/> white	132601
<input type="radio"/> gold	1002163
<input type="radio"/> chrome	132605

Options Prod. no.

<input checked="" type="radio"/> black	132670
<input type="radio"/> white	132671

Fitu set of 3 ceiling roses, round

16A max.
Steel
H: 5.4 cm
Diameter: 22 cm
Strain relief included


Options Prod. no.

<input checked="" type="radio"/> black	132610
<input type="radio"/> white	132611

1-phase adapter

6A max.
Polycarbonate (PC)
L: 8.5 cm W: 3.5 cm H: 3.2 cm
max. mech. load 2 kg


Surface-mounted ceiling rose

16A max.
Steel
H: 2.6 cm
Diameter: 9 cm


Options Prod. no.

<input checked="" type="radio"/> black	1004744
<input type="radio"/> white	1004745
<input type="radio"/> gold	1006377
<input type="radio"/> chrome	1004746

3-phase light adapter

10A max.
plastic
L: 9.6 cm W: 3.5 cm H: 4.5 cm
max. mech. Load 5 kg


Recessed ceiling rose

16A max.
Steel/polyamide 66 (PA 66)
H: 3.3 cm
Diameter: 8.5 cm


Options Prod. no.

<input checked="" type="radio"/> black	1004674
<input type="radio"/> white	1004675
<input type="radio"/> gold	1006378
<input type="radio"/> chrome	1004676

Cable hook

Aluminium
L: 3.1 cm
Diameter: 1.4 cm


Options Prod. no.

<input checked="" type="radio"/> black	132680
<input type="radio"/> white	132681

FENDA
PD, E27



FENDA
Glass shade



FENDA
15 cm, round





H: 20 cm
Diameter: 12.5 cm
Material: glass

H: 40 cm
Diameter: 15 cm
Material: textile/steel

Options	Prod. no.
● brown	1000773

Options	Prod. no.
● black/copper	156152
○ white	156141
● grey	1004773
● beige	156143



220-240V ~50/60Hz
Material: steel/plastic

- Matching accessories can be found on page 295
- Open cable end



Base: 1xE27

Options	Prod. no.
● black	132660
○ white	132661
● chrome	132662



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303





FENDA
30 cm, round



H: 20 cm
Diameter: 30 cm
Material: textile/steel

FENDA
Ø 45 cm, round



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

FENDA
Ø 70 cm, round



H: 36 cm
Diameter: 70 cm
Material: textile/steel

- Not suitable for Fenda Bow.

Options	Prod. no.
<input checked="" type="radio"/> black/copper	155592
<input type="radio"/> white	155582
<input type="radio"/> grey	1004774
<input type="radio"/> beige	155583

Options	Prod. no.
<input checked="" type="radio"/> black/copper	156122
<input type="radio"/> white	156111
<input type="radio"/> grey	1004775
<input type="radio"/> beige	156113

Options	Prod. no.
<input checked="" type="radio"/> black/copper	1000580
<input type="radio"/> white	1000579



Product	Prod. no.
Acrylic glass cover	156100



Product	Prod. no.
Acrylic glass cover	1000957

155561 + 1000579 296 + 297



MIX & MATCH FENDA

FENDA Ø15



Black	156152
White	156141
Beige	156143
Grey	1004773

FENDA Ø30

Black	155592
White	155582
Beige	155583
Grey	1004774

FENDA Ø45

Black	156122
White	156111
Beige	156113
Grey	1004775

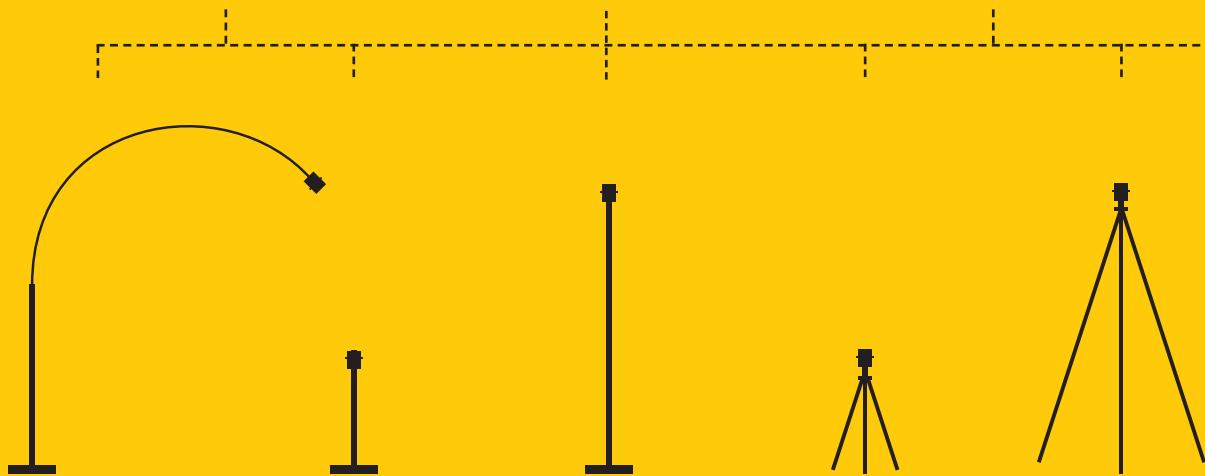

FENDA BOW

Black	1003029
Chrome	1000763

FENDA TL

Black	155780
-------	--------

FENDA FL

Black	155790
-------	--------

FENDA TL

Black	155540
-------	--------

FENDA FL

Black	155490
-------	--------

Combine the SLV Mix & Match products to suit your taste. Designed to work perfectly together, you can mix and match within the FENDA family or even combine the FENDA and FITU product families. You can recognise SLV Mix & Match products by the following symbol:



MIX
match


FENDA Ø70

Black | 1000580
White | 1000579



FENDA Ø12,5

Glass Shade
Brown | 1000773



FENDA PD

Black | 132660
White | 132661
Chrome | 132662



FENDA CL

Black | 155550
White | 155551

FITU CRANE BASE

Black | 1004682




FITU PD

Black | 132690
White | 132691

HELIA AMBIENT 35 PD, PHASE



200
38
3,5



220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/acrylic



500mA
Total wattage: 7.5W
Material: aluminium/acrylic

- Open cable end
- Diameter built-in rosette 68 mm



Down 425lm | 3000K

Options	Prod. no.
● black	1003436



Down 425lm | 3000K

Options	Prod. no.
● black	1003435



Product **Prod. no.**
LED driver 20W | 350mA/500mA | PHASE
 white **1007227**

LED driver 25W | 150-700mA | DALI dimmable

white **1007229**


LED driver 21W | 500mA | strain relief included

white **1007226**

HELIA AMBIENT 35 PD



200
38
3,5




1003436 300









HELIA 30 PD, PHASE

152360 301

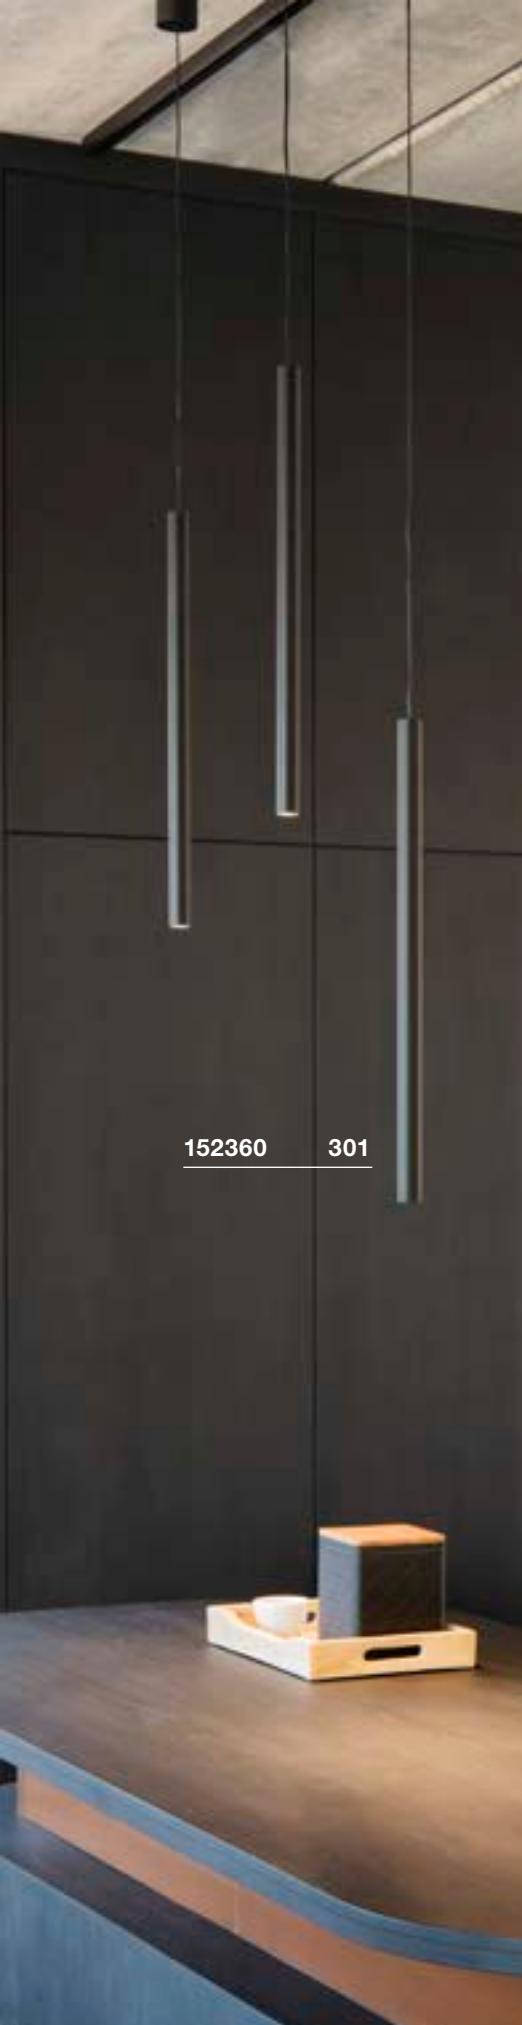

HELIA 30 PD



220-240V ~50/60Hz | 500mA

Total wattage: 9.2W

Material: aluminium

500mA

Total wattage: 7.5W

Material: aluminium

- Includes built-in rosette
- Material thickness of mounting surface: max. 12 mm
- Diameter built-in rosette 68 mm



CRI
90

Down

590lm | 3000K



CRI
90

Down

500lm | 3000K

Options	Prod. no.
● black	152360

Options	Prod. no.
● black	158400



Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	
○ white	1007227
LED driver 25W 150-700mA DALI dimmable	
○ white	1007229
LED driver 21W 500mA strain relief included	
○ white	1007226


152370

303



HELIA 40
PD, PHASE

158400 303

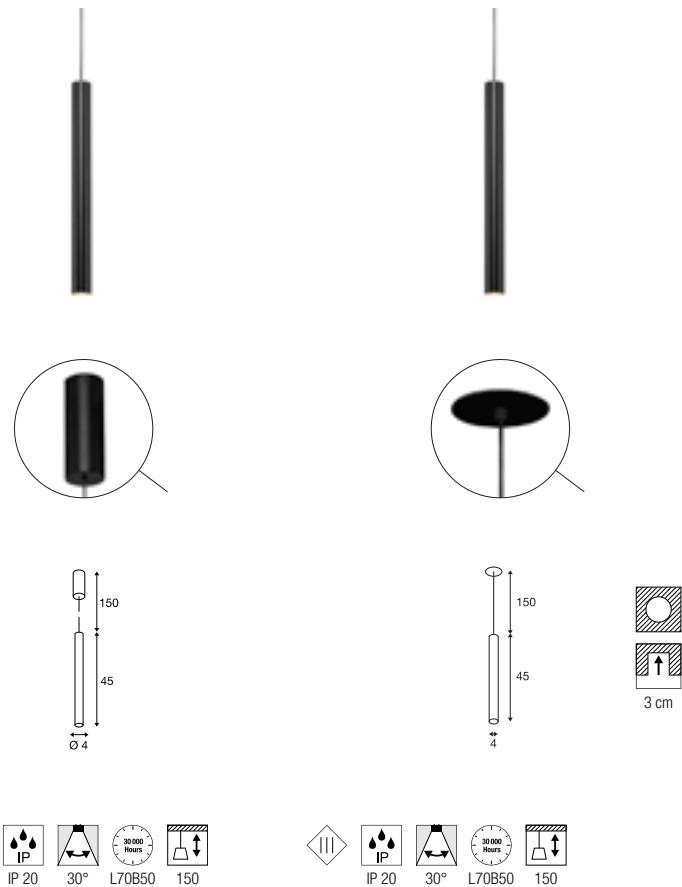HELIA 40
PD

220-240V ~50/60Hz | 500mA

Total wattage: 10W

Material: aluminium

500mA

Total wattage: 9W

Material: aluminium

- Includes built-in rosette
- Material thickness of mounting surface: max. 12 mm
- Diameter built-in rosette 68 mm



CRI 90

Down

730lm | 3000K



CRI 90

Down

700lm | 3000K

Options	Prod. no.
● black	152370



Options	Prod. no.
● black	158410



Product	Prod. no.
LED driver 20W 350mA/500mA PHASE	
○ white	1007227
LED driver 25W 150-700mA DALI dimmable	
○ white	1007229
LED driver 21W 500mA strain relief included	
○ white	1007226



149388 305


ASTINA
PD, QPAR51


220-240V ~50/60Hz
Material: aluminium

- Open cable end



Base: 1xGU10



Options	Prod. no.
● black	1002939
○ white	1002937



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no.: 1005273

ENOLA B
PD, QPAR51


220-240V ~50/60Hz
Material: aluminium/steel



Base: 1xGU10




Options	Prod. no.
● black	151850
○ white	151851
● gold	151853



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077

ENOLA
PD, E27


220-240V ~50/60Hz
Material: aluminium/steel



Base: 1xE27 Max. Ø: 9 cm L: 18 cm

Options	Prod. no.
● black	149388
○ white	149381
● gold	149387



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h





Prod. no.: 1005302



Product	Prod. no.
1-phase adapter	
● black	143120
○ white	143121
● grey	143124
3-phase light adapter	
● black	145990
● grey	145994
○ white	1001542
Fitu single ceiling rose, round	
● black	132600
● chrome	132605
Fitu single ceiling rose	
○ white	132601
Fitu set of 3 ceiling roses, round	
● black	132610
○ white	132611

ANELA
PD, PHASE

LISENNE
PD, E27



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



- Reflector not included
- Luminous flux with reflector 1000809 = 500lm/ luminous flux with reflector 1000810 = 620lm/ luminous flux with reflector 1000811 = 200lm/ luminous flux with reflector 1000812 = 600lm



Down 220lm | 3000K | 750lm |


Options	Prod. no.
● black	1000813

Product	Prod. no.
Reflector 28°	
● black	1000811
○ white	1000812
● gold	1000809
● grey	1000810



220-240V ~50/60Hz
Material: basalt/glass

1000813 306

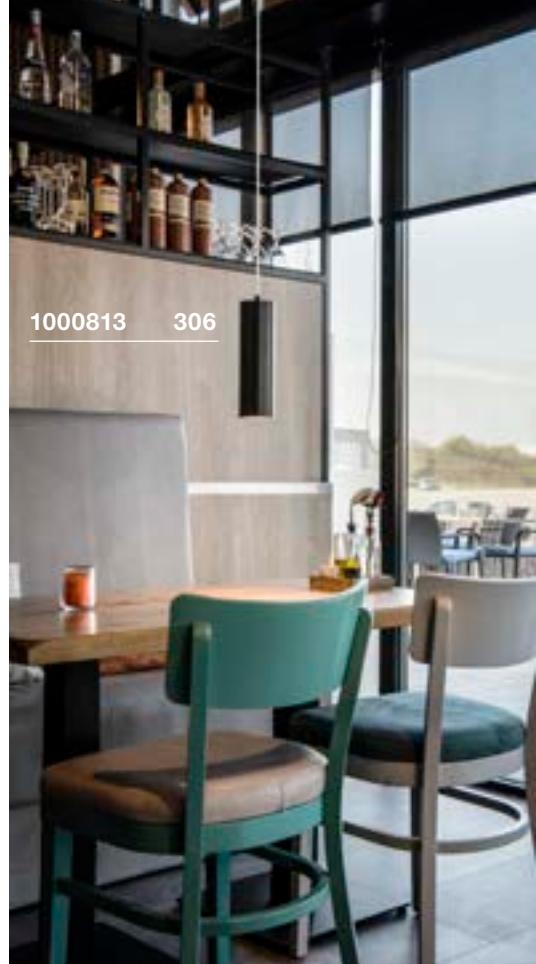

Base: 1xE27 | Max. Ø: 5.9 cm | L: 15 cm


Options	Prod. no.
● grey/brown	155714

LED E27 | 8W | 240°
3000K | 880lm | EEC=E
8kWh/1000h

Prod. no.: 1005289




155714 306

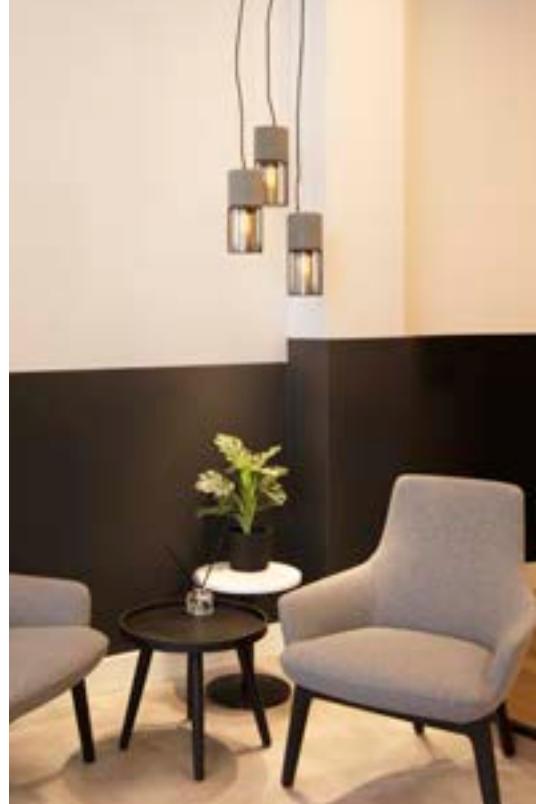




TONGA®
PD, E14

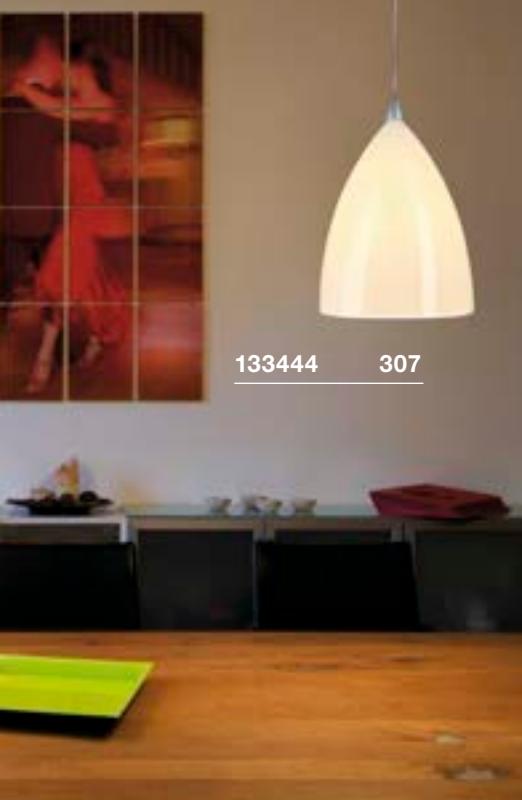


133444

307




QUADRASS
PD, E27

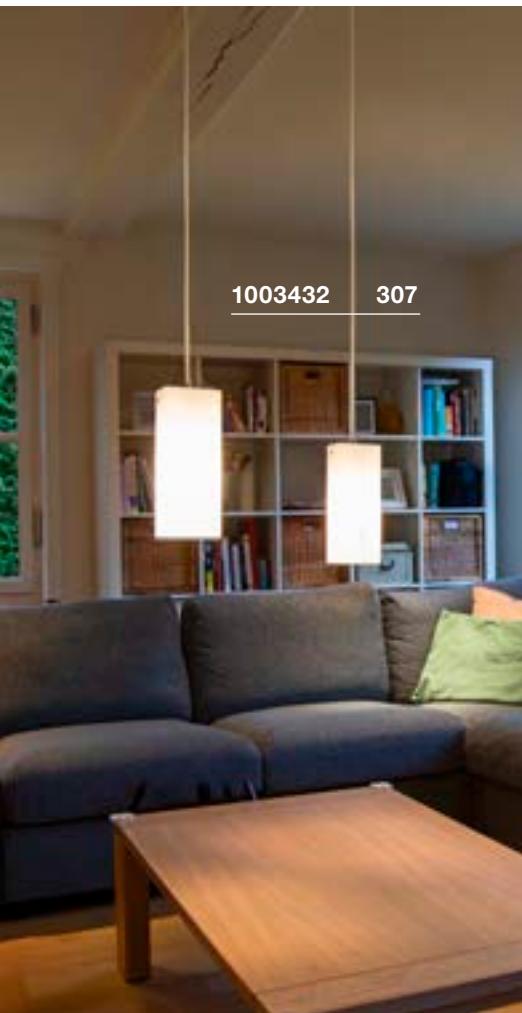


1003432

307



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: steel/glass

- Open cable end



Base: 1xE14 Max. Ø: 5.1 cm L: 13 cm



Base: 1xE27 Max. Ø: 6.5 cm L: 18 cm

Options	Prod. no.
● grey	133444

Options	Prod. no.
● chrome	1003432



C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302



Product	Prod. no.
---------	-----------

1-phase adapter	
○ white	143121
3-phase light adapter	
○ white	1001542

Fitu single ceiling rose	
○ white	132601


1006159 **309**



133019 **309**





133060 **309**

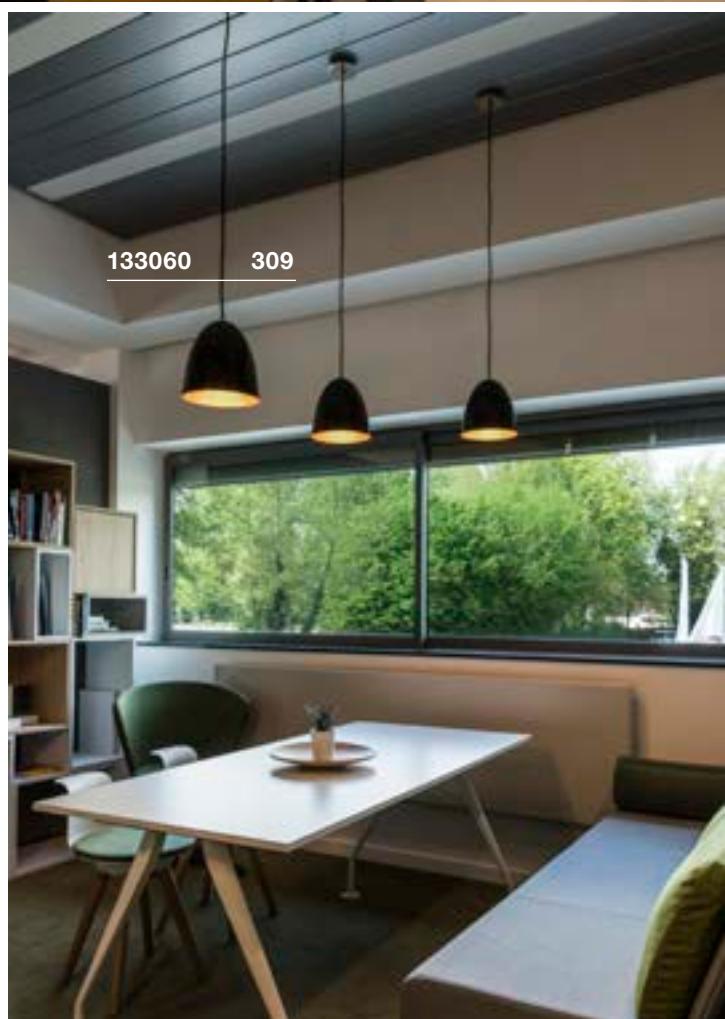






PARA CONE GL PD, GU10



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



PARA CONE 20 PD, E27



220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable
- black/gold version with golden reflector
- all other versions with white reflector

PARA CONE 30 PD, E27



220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable
- black/gold version with golden reflector
- all other versions with white reflector

INSIDE <25 W

Base: 1xE27

Options	Prod. no.
● black	1006159
○ white	1006160



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077

INSIDE <60 W

Base: 1xE27

Options	Prod. no.
● gold/black	133050
● copper	133009



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no.: 1005303

INSIDE <60 W

Base: 1xE27

Options	Prod. no.
● black/gold	133060
● copper	133019



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no.: 1005303



Product Prod. no.

1-phase adapter	
● black	143120
○ white	143121
● grey	143124
3-phase light adapter	
● black	145990
● grey	145994
○ white	1001542
Surface-mounted ceiling rose	
● black	1004744
○ white	1004745
● chrome	1004746
Recessed ceiling rose	
● black	1004674
○ white	1004675
Fitu single ceiling rose, round	
● black	132600
● chrome	132605
Fitu single ceiling rose	
○ white	132601



1002949 **311**

1002951 **310**



1002950 **311**

PHELIA 10
PD, E27



220-240V ~50/60Hz
Material: aluminium

- Textile cable

SOCKET INSIDE <23 W

Base: 1xE27

Options **Prod. no.**
● black/gold **1002951**





A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: **1005305**





PHELIA 20
PD, E27



220-240V ~50/60Hz
Material: aluminium

- Textile cable



Base: 1xE27



Options	Prod. no.
● black/gold	1002948



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302

PHELIA 25
PD, E27



220-240V ~50/60Hz
Material: aluminium

- Textile cable



Base: 1xE27



Options	Prod. no.
● black/gold	1002949



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302

PHELIA 30
PD, E27



220-240V ~50/60Hz
Material: aluminium

- Textile cable



Base: 1xE27

Options	Prod. no.
● black/gold	1002950




G125 | 7.5W | 320°
2700K | 800lm
EEK=F 8kWh/1000h

Prod. no.: 1005310



FORCHINI 50
PD, E27



220-240V ~50/60Hz
Material: GFK

- Textile cable



Base: 1xE27

max. L: 20 cm

Options	Prod. no.
● black/gold	155530





A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



FORCHINI 70
PD, E27



220-240V ~50/60Hz
Material: GFK

- Textile cable




Base: 1xE27

max. L: 20 cm

Options	Prod. no.
● black/gold	1001701

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302

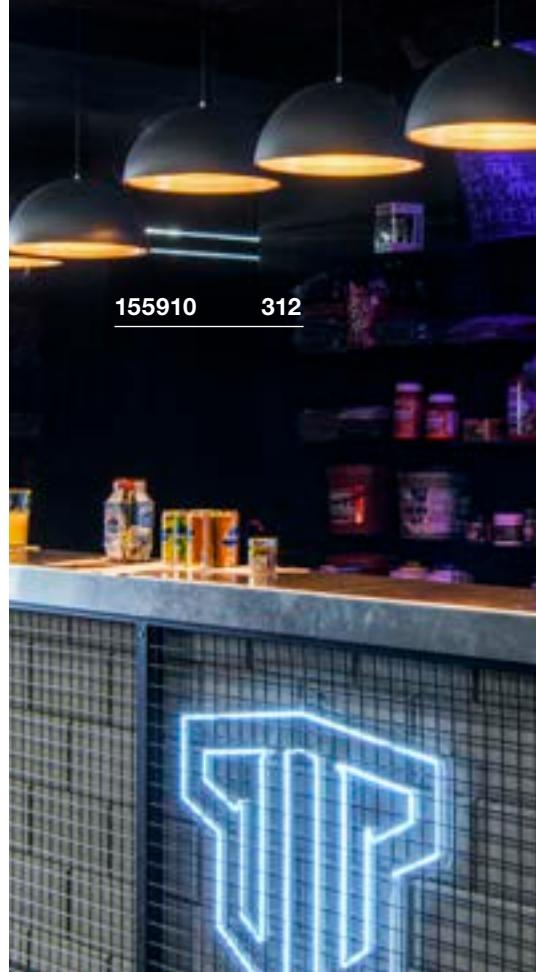



155910 **312**




1001701 **311**



FORCHINI M 40
PD, E27



FORCHINI M 50
PD, E27



220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable



Base: 1xE27


max. L: 15.2 cm

Options

● black/gold

Prod. no.

155910



220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable



Base: 1xE27

max. L: 18 cm

Options

● black/gold

Prod. no.

155930



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302



LIGHT EYE® 90
PD, GU10



220-240V ~50/60Hz
Material: steel

- Textile cable



Base: 1xGU10



Options	Prod. no.
<input checked="" type="radio"/> black/chrome	133490


LED GU10 51mm | 5W | 38°
2700-6500K | 350lm | EEK=G
5kWh/1000h

Prod. no.: **1005311**

Product	Prod. no.
Lamp decorative ring diameter 5.7cm	
<input checked="" type="radio"/> black	151040
<input type="radio"/> white	151041
<input checked="" type="radio"/> chrome	151049

LIGHT EYE® 150
PD, QPAR111



220-240V ~50/60Hz
Material: steel

- Textile cable



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> white/chrome	133481
<input type="radio"/> chrome	133482
<input checked="" type="radio"/> copper	133489


QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h

Prod. no.: **1005276**

133482 314





133481 314





SUN / BIG SUN
PD, E27

1002045 315



220-240V ~50/60Hz
Material: steel/glass

- Matching accessories can be found on page 295
- Open cable end



Base: 1xE27 Max. Ø: 7 cm L: 12 cm

Options Prod. no.

<input type="radio"/> 1xE27 Ø: 19.5 cm	1002045
<input type="radio"/> 1xE27 Ø: 30 cm	1002046



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no.: 1005303

165410 317



165400 317





165390 317





ROTOBALL 25
PD, E27



220-240V ~50/60Hz
Material: steel/polyethylene (PE)




Base: 1xE27

Max. Ø: 7 cm



Prod. no.
165390



220-240V ~50/60Hz
Material: steel/polyethylene (PE)




Base: 1xE27

Max. Ø: 9.5 cm



Prod. no.
165410




220-240V ~50/60Hz
Material: steel/polyethylene (PE)



Base: 1xE27

Max. Ø: 9.5 cm



Prod. no.
165400



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: **1005302**



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: **1005302**



PARA DOME
PD, E27




PARA DOME
Shade



IP 20

H: 20.6 cm
Diameter: 30.8 cm
Material: aluminium



Options	Prod. no.
● black	1005216
● black/gold	1006410
● grey	1005217



220-240V ~50/60Hz
Material: aluminium

- Open cable end



Base: 1xE27

Max. Ø: 7 cm

Options	Prod. no.
● black	1005214
● grey	1005215



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h



Prod. no.: 1005302

PARA DOME
Shade



IP 20

H: 20 cm
Diameter: 31.5 cm
Material: polycarbonate (PC)



Product Prod. no.

1-phase adapter	
● black	143120

3-phase light adapter	
● black	145990

Surface-mounted ceiling rose	
● black	1004744

Ceiling rosette	
● black	210060

Fitu single ceiling rose, round	
● black	132600



Options Prod. no.

○ transparent	1005218
---------------	---------





PARA 380
PD, E27



220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <20 W

Base: 1xE27

Options	Prod. no.
● black	165359
● aluminium	165358



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302



1007612 325





 LED LYGANT 325	 LED LYGANT 325	 SOCKET VARYT 327	 LED SEDO 7 329	 LED SEDO 14 329	 LED SEDO 21 329
 LED TRUKKO 330	 LED TRUKKO 330	 LED TRUKKO 331	 LED TRUKKO 80 331	 LED TRUKKO 60 332	 LED TRUKKO 90 332
 LED MARYLIN 40 333	 LED WL 149 334	 SOCKET WL 149 334	 SOCKET WL 106 335	 SOCKET WL 106 335	 SOCKET MIBO UP/DOWN 337
 LED MAGANDA 337	 LED DORISA 30 339	 LED DORISA 50 339	 LED GLENOS® 60 339	 LED L-LINE 60 341	 LED L-LINE 120 341
 LED Q-LINE® 341	 SOCKET PANTILO ROPE 345	 SOCKET ASTO TUBE 347	 SOCKET ASTO TUBE 347	 LED MANA BASE 349	 LED MANA BASE 349
 MANA 40 319	 MANA 60 349	 LED MANA 351	 MANA 351	 MANA 351	 LED MANA 353
 LED MANA 353	 MANA 353	 MANA 353	 LED OCULUS 355	 LED OCULUS UP/DOWN 355	 SOCKET PLASTRA 356



SOCKET
PLASTRA | 356



SOCKET
PLASTRA | 357



SOCKET
PLASTRA | 357



SOCKET
PLASTRA | 359



LED
PLASTRA | 359



LED
PLASTRA | 359



SOCKET
PLASTRA | 360



SOCKET
PLASTRA 101 | 361



SOCKET
PLASTRA | 361



SOCKET
PLASTRA 104 | 361



LED
LOGS IN | 362



LED
LOGS IN | 362



LED
LOGS IN L | 363



LED
LOGS IN L | 363



LED
QUAD FRAME 14 | 364



LED
QUAD FRAME 19 | 364



LED
SHELL 15 | 365



LED
SHELL 30 | 365



LED
ASSO 300 | 366



LED
ASSO 300 | 367



SOCKET
OSSA 180 | 367



SOCKET
OSSA 300 | 367



LED
CARISO | 368



LED
CARISO | 368



LED
CHROMBO | 369



LED
DIRETO 60 | 370



LED
DIRETO 90 | 370



LED
ARLINA 60 | 371



LED
ARLINA 130 | 371



SOCKET
ANDREAS | 373



SOCKET
DENA 30 | 373



SOCKET
BASKET | 373



SOCKET
QUADRASS | 375



LED
QUADRASS SPOT | 375



SOCKET
LISENNE | 375



SOCKET
FITU | 376



SOCKET
FITU CUBE | 376



SOCKET
THEO UP/DOWN | 377



SOCKET
SOLID CUBE | 377



ENOLA B | 379



ENOLA B | 379



ASTINA
UP/DOWN | 379

**SOCKET**

FENDA | 380



FENDA | 380

LED

KENKUA SPOT | 381

**LED**

COUPA FLEX | 381

**LED**

KARPO MAGN | 382

**LED**

KARPO GOOSE | 382

**LED**

KARPO 30 | 383

**LED**

KARPO | 383

**LED**

SOMNILA SPOT | 384

**LED**

SOMNILA SPOT | 385

**LED**

SOMNILA FLEX | 385

**LED**

SOMNILA FLEX | 385

**SOCKET**

DIO FLEX PLATE | 387

**LED**

DIO FLEX PLATE | 387

**LED**

DIO FLEX PLATE | 387

**SOCKET**

PHELIA | 388

**LED**

MERADO FLOOD | 388

**SOCKET**

DISPLAY ADL 50 | 389




1007619 **325**






LYGANT WL, single

LYGANT WL, double



220-240V ~50/60Hz | 700mA
Total wattage: 8W
Material: stainless steel/glass



220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: stainless steel/glass



Down



Down

560lm | 3000K

800lm | 3000K

Options	Prod. no.
● black	1007614
○ white	1007613
■ brass	1007612
● chrome	1007615




Options	Prod. no.
● black	1007618
○ white	1007617
■ brass	1007616
● chrome	1007619

1007603 **327**





VARYT WL, E14

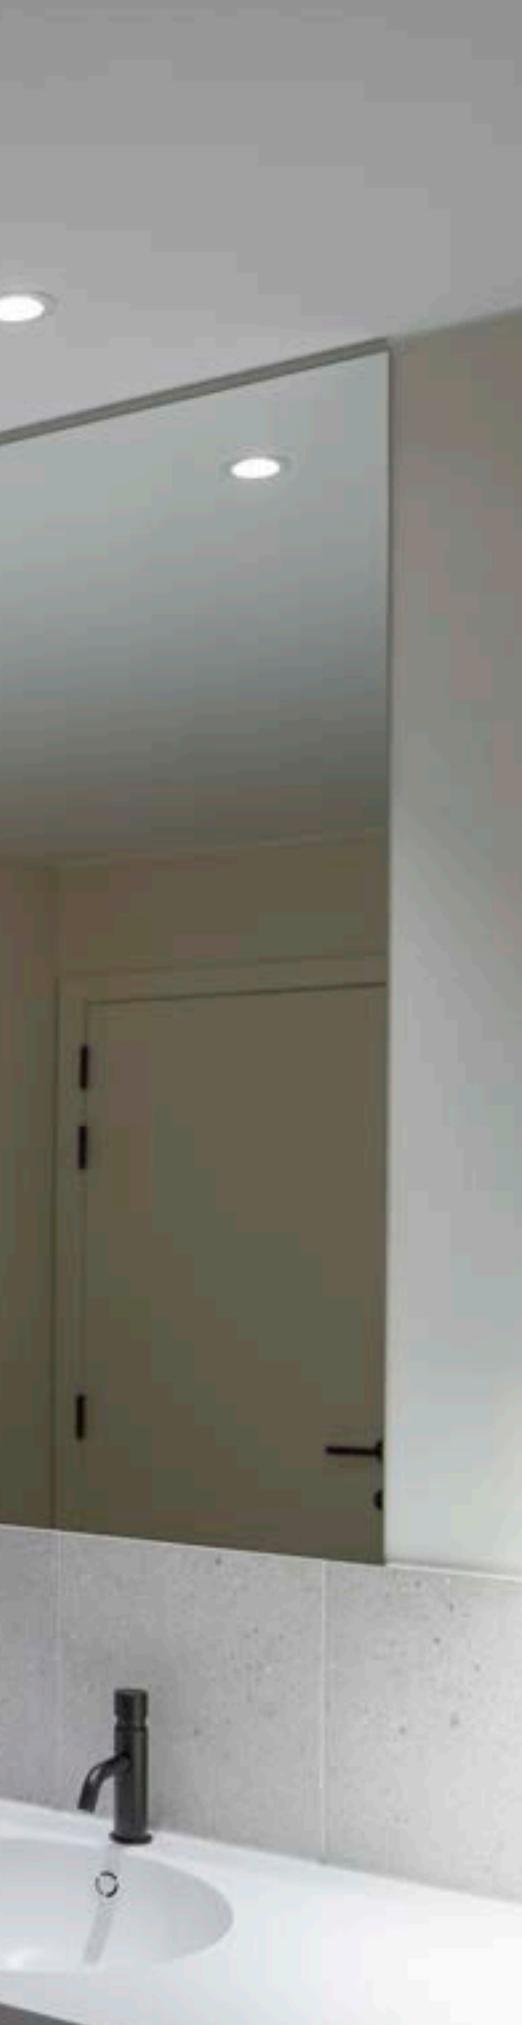

220-240V ~50/60Hz
 Material: stainless steel/glass 1007601
 Steel/glass 1007603, 1007602, 1007600

SOCKET INSIDE <6 W


Base: 1xE14 Max. Ø: 3.8 cm L: 11 cm

Options	Prod. no.
● black	1007603
○ white	1007602
● brass	1007601
● chrome	1007600


 C35 | 4.2W | 320°
 2700K | 350lm | EEK=G
 5kWh/1000h
Prod. no.: 1005285





151796 329

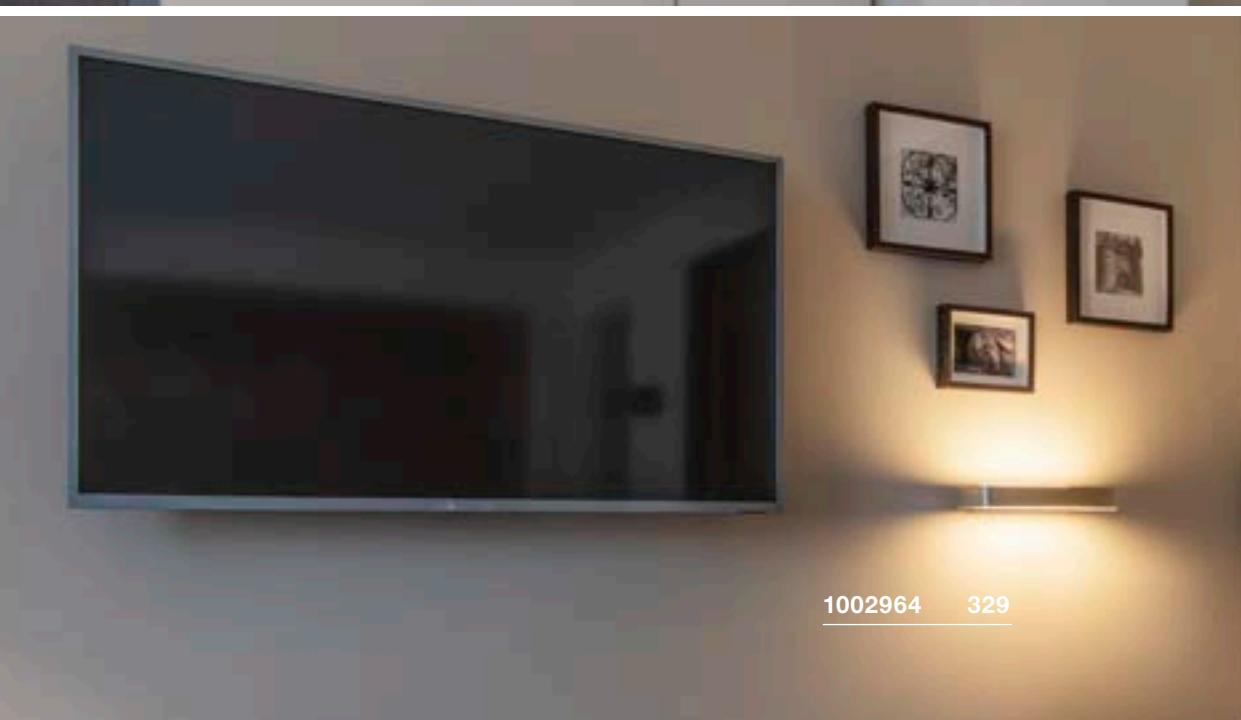

1002964 329



**SEDO 7
WL**



220-240V ~50/60Hz | 350mA
Total wattage: 11.5W
Material: aluminium/glass



Down

1020lm | 3000K



Down

1300lm | 3000K





Down

2500lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1002962
<input checked="" type="radio"/> aluminium	1002964

Options	Prod. no.
<input type="radio"/> white	151781
<input checked="" type="radio"/> aluminium	151786

Options	Prod. no.
<input type="radio"/> white	151791
<input checked="" type="radio"/> aluminium	151796



220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass



Down

1300lm | 3000K




Down

2500lm | 3000K

Options	Prod. no.
<input type="radio"/> white	151781
<input checked="" type="radio"/> aluminium	151786

Options	Prod. no.
<input type="radio"/> white	151791
<input checked="" type="radio"/> aluminium	151796

**SEDO 21
WL**



220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/glass




Down

2500lm | 3000K

1004729 330



TRUKKO
WL, square, mirror heating



IP 44

220-240V ~50/60Hz | 24V

Total wattage: 24 W

Material: glass/aluminium

- incl. mirror heating
- Light colour can be adjusted via touch function



1310lm | 3000K | 1320lm | 4000K | 1340lm | 6500K


Options

silver/opaque

Prod. no.

1004729

TRUKKO
WL, rectangular



IP 44

220-240V ~50/60Hz | 24V

Total wattage: 25W

Material: glass/plastic

- incl. mirror heating
- Light colour can be adjusted via touch function



1080lm | 3000K | 1290lm | 4000K | 1250lm | 6500K

Options

silver/opaque

Prod. no.

1004730






1007201 331



1007202 331

TRUKKO
WL, round

NEW

TRUKKO 80
WL, round

NEW



220-240V ~50/60Hz | 24V

Total wattage: 25W

Material: glass/ABS

- incl. mirror heating
- Light colour can be adjusted via touch function

CRI
90

730lm | 3000K | 710lm | 4000K | 720lm | 6500K

Options Prod. no.

silver/opaque
1270/1260/1260lm **1004731**

transparent/black
730/710/720lm **1007201** ●



220-240V ~50/60Hz | 24V

Total wattage: 23W

Material: glass/ABS

- incl. mirror heating
- Light colour can be adjusted via touch function

CRI
90

730lm | 3000K | 740lm | 4000K | 790lm | 6500K

Options Prod. no.



silver/opaque
1100/1130/1210lm **1007200** ●

transparent/black
730/740/790lm **1007202** ●

TRUKKO 60
WL



TRUKKO 90
WL



220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/plastic



Down

750lm | 3000K




Down

1040lm | 3000K

Options	Prod. no.
● chrome	149762

Options	Prod. no.
● chrome	149772


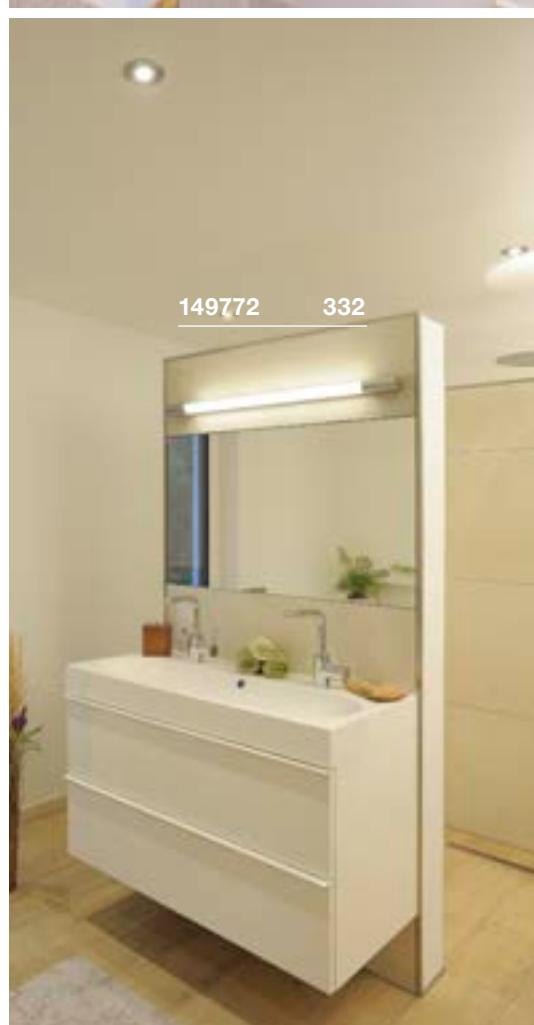




MARYLIN 40/60/90 WL



1002191 **333**

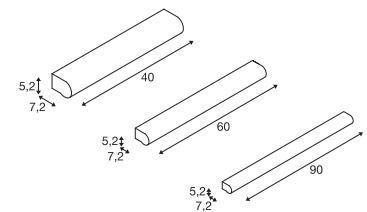

220-240V ~50/60Hz | 350mA

Total wattage: 9.8W

Material: aluminium/polycarbonate (PC)






CRI
80

Down 890lm | 3000K 980lm | 4000K


Options	Prod. no.
● chrome L: 40cm 890/980lm 9.8W	1002190
● chrome L: 60cm 1170/1280lm 16W	1002191
● chrome L: 90cm 1800/1990lm 21W	1002192

WL 149
WL, PHASE

WL 149
WL, QT-DE12



220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: steel/glass



220-240V ~50/60Hz
Material: steel/glass



Down 1050lm | 3000K



Base: R7s 78mm

Options	Prod. no.
<input type="radio"/> white	149511

Options	Prod. no.
<input type="radio"/> white/frosted	149471




LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no.: 1005287





149511 334

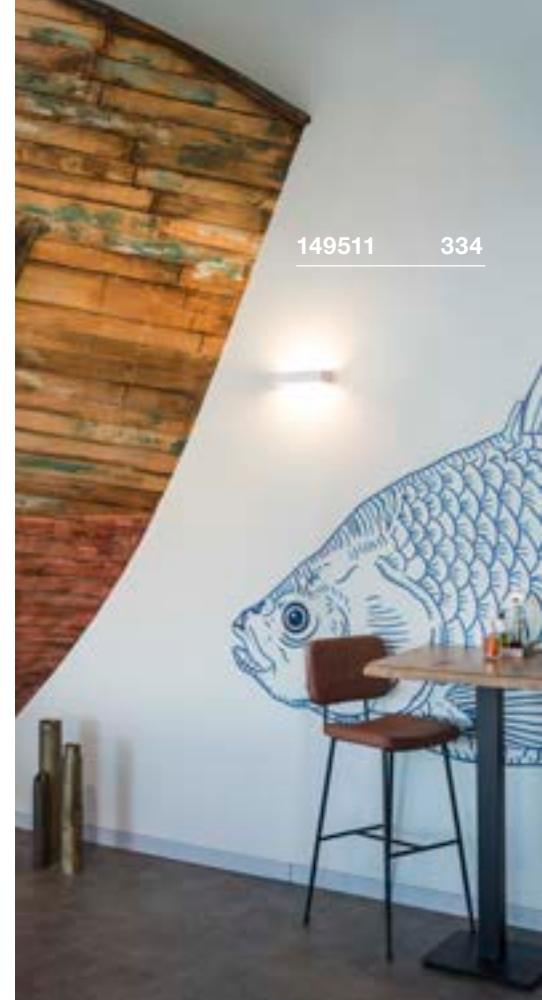

149471 334



WL 106
E14WL 106
E14

220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xE14 Max. Ø: 3.6 cm L: 11 cm

Options	Prod. no.
● chrome	1002228

C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



Base: 2xE14 Max. Ø: 3.6 cm L: 11 cm

Options	Prod. no.
● chrome	1002229

C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285

1004971 **337**







MIBO UP/DOWN WL, QT14

151282 **337**



MAGANDA WL



220-240V ~50/60Hz
Material: aluminium/glass




Base: 2xG69

Options	Prod. no.
● chrome	151282

LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: **1005286**



100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

- Light colour can be adjusted via the housing switch



CRI 90

45lm | 2700K | 48lm | 3000K | 51lm | 4000K

Options	Prod. no.
● chrome	1004971



1003507 **339**









DORISA 30 WL



DORISA 50 WL




GLENOS® 60 WL




200-240V ~50Hz | 340mA
Total wattage: 5.2W
Material: aluminium/plastic

- Clamping range: 0-6mm
- Can be converted to a mirror light by removing the bracket



200-240V ~50Hz | 340mA
Total wattage: 6.6W
Material: aluminium/plastic

- Clamping range: 0-6mm
- Can be converted to a mirror light by removing the bracket



220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)



Down 300lm | 4000K



Down 370lm | 4000K



Down 1170lm | 3000K
4000K

Options	Prod. no.
<input checked="" type="radio"/> chrome	1000777

Options	Prod. no.
<input checked="" type="radio"/> chrome	1000780



Options	Prod. no.
<input checked="" type="radio"/> black	1003506
<input type="radio"/> white	1003507
<input checked="" type="radio"/> grey	1003508

1000669 **341**







L-LINE 60 WL





220-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/polycarbonate (PC)

L-LINE 120 WL



220-240V ~50/60Hz | 350mA
Total wattage: 18.5W
Material: aluminium/polycarbonate (PC)

Q-LINE® WL



220-240V ~50/60Hz | 700mA
Total wattage: 45W
Material: aluminium/acrylic

CRI
80

Down

820lm | 3000K

CRI
80

Down

1650lm | 3000K

CRI
80

Down

3800lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1001299
<input checked="" type="radio"/> silver	1001300

Options	Prod. no.
<input type="radio"/> white	1001303
<input checked="" type="radio"/> silver	1001304

Options	Prod. no.
<input checked="" type="radio"/> black	1000669
<input type="radio"/> white	1000668
<input checked="" type="radio"/> grey	1000670

IP CLASSES

Play it safe with your lighting. No problem with SLV interior lights and the right IP rating for the relevant application area.



Lighting in a modern feel-good environment should be functional, restorative and safe, so it is vital to choose the right IP rating depending on where the light will be used.

The abbreviation IP stands for Ingress Protection. The first digit in these standardised IP codes indicates the protection against solid objects, the second digit indicates protection against moisture. It is the latter that is particularly important for bathrooms and outdoor areas.

FOREIGN OBJECTS WATER

No protection	0	0	No protection
protects against access with the back of a hand (diameter > 50 mm)	1	1	protection against vertically falling water droplets
protects against access with a finger (diameter > 12.5 mm)	2	2	protection against falling water droplets if the enclosure is tilted up to 15°
protects against access with a tool (diameter > 2.5 mm)	3	3	protection against spraying water falling at up to 60° from the vertical
protects against access with a wire (diameter > 1 mm)	4	4	protection against water splashing from all sides
Complete protection against contact (against harmful quantity of dust)	5	5	protection against water jets (from a nozzle) from any angle
complete protection against contact (dust-proof)	6	6	protection against powerful water jets
	7		protection against temporary immersion
	8		protection against continuous immersion

EXAMPLE IP 65:

The product has maximum dust protection at level 6 and high protection against water jets at level 5. It can therefore be classified as dust-tight and water-resistant.






PANTILO ROPE WL, G9

NEW



1007595 345

200-240V ~50/60Hz
Material: steelSOCKET
INSIDE <15
W

Base: 1xG69 Max. Ø: 3 cm L: 6 cm

Options	Prod. no.
gold	1007595
silver	1007594

LED G9 | 3.6W | 300°
3000K | 400lm | EEE=E
4kWh/1000h

Prod. no.: 1005286



1006441 347



1006444 347





ASTO TUBE
WL, single, GU10





ASTO TUBE
WL, up/down, GU10




ASTO TUBE
Decorative reflector



H: 3.95 cm
Diameter: 6.75 cm
Material: polycarbonate (PC)



Options	Prod. no.
● black/chrome	1007190
○ gold	1006450
○ chrome	1006449
○ copper	1006451



220-240V ~50/60Hz
Material: aluminium



220-240V ~50/60Hz
Material: aluminium



Base: 1xGU10

Options	Prod. no.
● black	1006441
○ white	1006442



Base: 2xGU10

Options	Prod. no.
● black	1006443
○ white	1006444



1004969 + 1004660 349





1004657 + 1004663 349





MANA BASE WL, round, PHASE



220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)



Down 800lm | 2700K | 820lm | 3000K

Options	Prod. no.
● anthracite	1006319

MANA BASE round



MANA 40 shade, round



H: 6 cm
Diameter: 40 cm
Material: felt/aluminium

- The felt shade can be sound-absorbing if multiple shades are mounted on a wall

Options	Prod. no.
● grey	1004661
● beige	1004660



Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round shades in the MANA series

MANA 60 shade, round



H: 6 cm
Diameter: 60 cm
Material: felt/aluminium

- The felt shade can be sound-absorbing if multiple shades are mounted on a wall

Options	Prod. no.
● grey	1004663
● beige	1004662

1000613 + 1000824 351





MANA
WL, Base, PHASE

MANA
Shade


L: 12 cm H: 10 cm D: 9 cm
Material: wood

- suitable only with 1000613



Options	Prod. no.
<input type="radio"/> white	1000618
<input checked="" type="radio"/> grey/brown	1000616



220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/steel



Down

520lm | 2000-3000K

Options	Prod. no.
<input type="radio"/> white	1000613


MANA
Shade


W: 13.6 cm H: 10 cm D: 9.5 cm
Material: plaster/steel

- suitable only with 1000613
- Can be painted over/wallpapered to match wall colour

Options	Prod. no.
<input type="radio"/> white	1000824

1000615 + 1000823 353





MANA WL, Base, PHASE



MANA WL, Base





MANA Shade




L: 29 cm H: 9.5 cm D: 7 cm
Material: wood

- suitable only with 1000614/1000615




Options	Prod. no.
<input type="radio"/> white	1000623
<input checked="" type="radio"/> grey/brown	1000621



220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium/steel



220-240V ~50/60Hz | 350/500mA

Total wattage: 11W

Material: aluminium/steel

- Spotlights with separate switches



Down

700lm | 2000-3000K



Down

650lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1000614

Options	Prod. no.
<input type="radio"/> white/chrome	1000615



W: 30.9 cm H: 9.5 cm D: 7.4 cm
Material: plaster/steel

- suitable only with 1000614/1000615
- Can be painted over/wallpapered to match wall colour

Options	Prod. no.
<input type="radio"/> white	1000825

1006308 355







OCULUS WL, single, PHASE



1004671 355




220-240V ~50/60Hz | 350mA
Total wattage: 8.5W
Material: aluminium/glass



Down 570lm | 2000-3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1006307
<input type="radio"/> white	1006308

OCULUS UP/DOWN WL, PHASE



220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass

- Additional frosted lens included







Up 22lm | 2000K - 555lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1004670
<input type="radio"/> white	1004671

PLASTRA
WL, Cube, QT14



PLASTRA
WL, Cubes



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour



Base: 1xG69



Base: 2xG69 Max. Ø: 7 cm L: 4 cm

Options	Prod. no.
<input type="radio"/> white	148018

 LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h


Prod. no.: **1005286**



Options	Prod. no.
<input type="radio"/> white	1004733

 LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h



Prod. no.: **1005286**

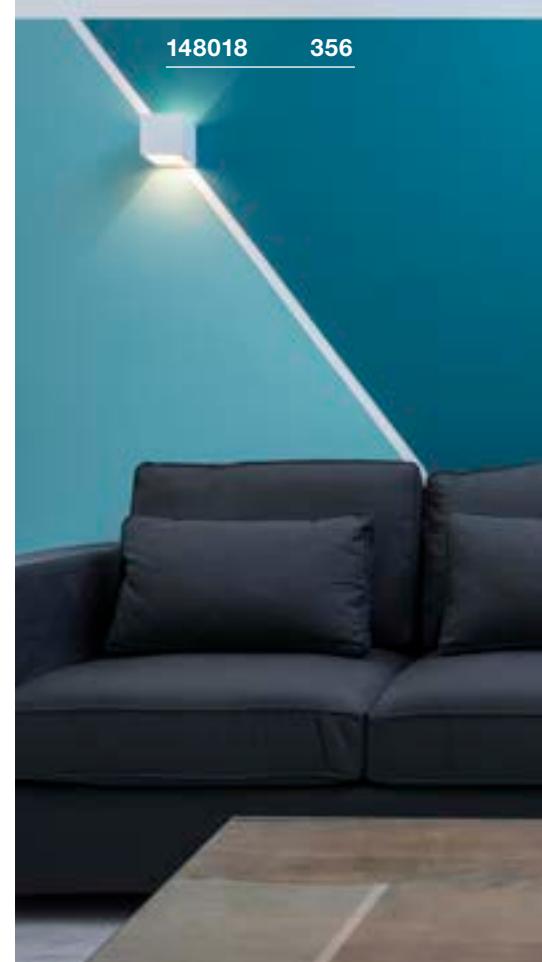



PLASTRA
WL, rectangular, QT-DE12

PLASTRA
WL, E14




148010 357



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour



Base: 1xR7s 118mm

Options	Prod. no.
<input type="radio"/> white	1002238



Base: 1xE14

Options	Prod. no.
<input type="radio"/> white	148010



LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no.: 1005288



C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h




Prod. no.: 1005285



1004732 359





148091 359

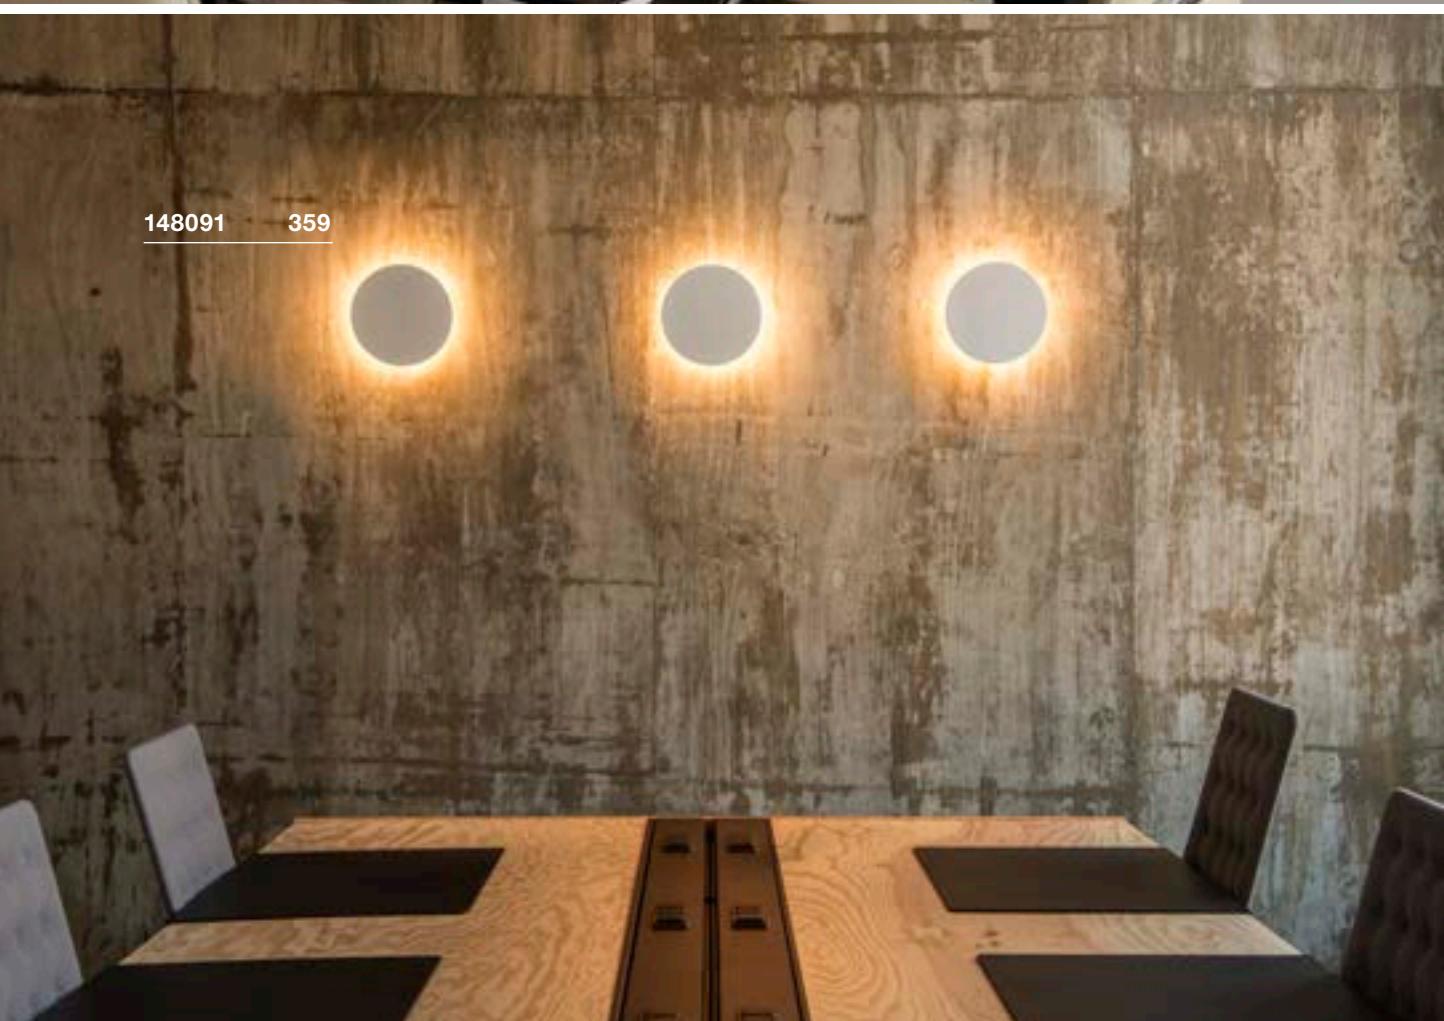



PLASTRA
WL, semicircular



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour





Base: 1xR7s 118mm Max. diameter: 2 cm L: 11.8 cm

Options	Prod. no.
<input type="radio"/> white	1004732

LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no.: 1005288

PLASTRA
WL, round shield



100-240V ~50/60Hz | 12V
Total wattage: 6.5W
Material: plaster/steel



- Can be painted over/wallpapered to match wall colour



Down 375lm | 3000K

Options	Prod. no.
<input type="radio"/> white	148091

PLASTRA
WL, square



100-240V ~50/60Hz | 12V
Total wattage: 10.5W
Material: plaster/steel



- Can be painted over/wallpapered to match wall colour



Down 650lm | 3000K

Options	Prod. no.
<input type="radio"/> white	148019

PLASTRA
WL, QPAR51

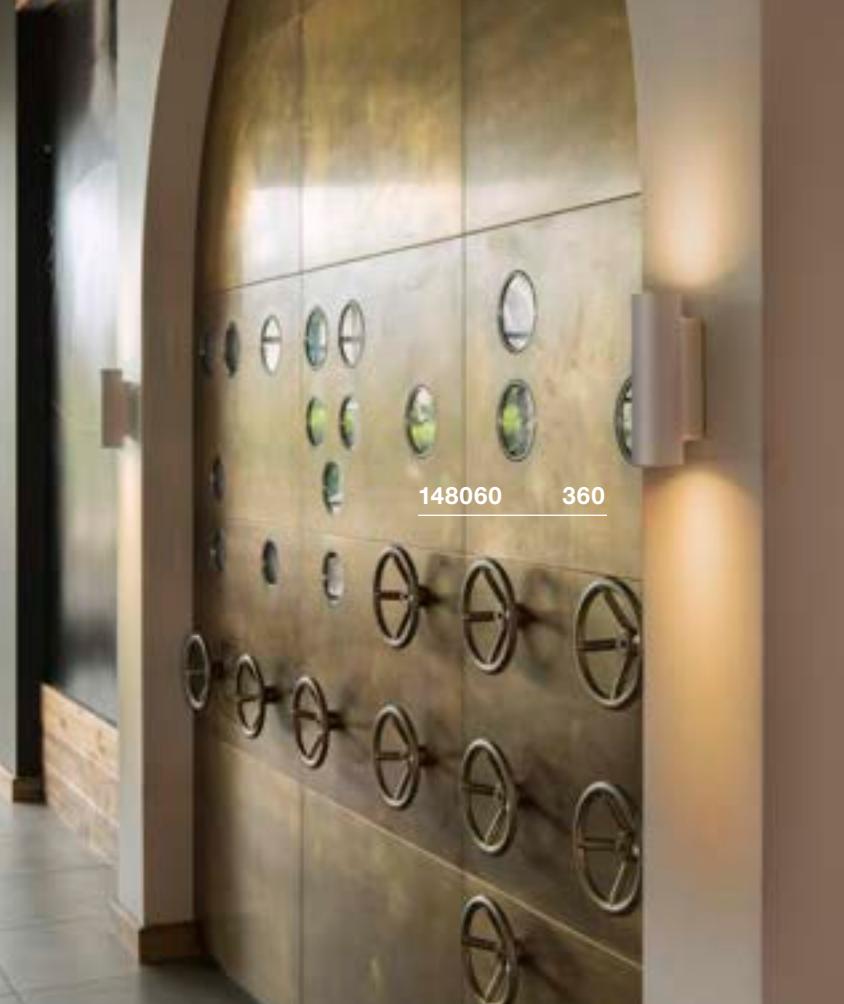

220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour



Base: 2xGU10

Options	Prod. no.
<input type="radio"/> white	148060




LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no.: 1005273




PLASTRA 101
WL, E14



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour


PLASTRA
WL, Curve, QT-DE12



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour

PLASTRA 104
WL, QT14



220-240V ~50/60Hz
Material: plaster/steel

- Can be painted over/wallpapered to match wall colour



Base: 1xE14 Max. Ø: 4.5 cm L: 11 cm

Options	Prod. no.
<input type="radio"/> white	148013



C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



Base: 1xR7s 78mm

Options	Prod. no.
<input type="radio"/> white	148012



LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no.: 1005287



Base: 1xG69


Options	Prod. no.
<input type="radio"/> white	148016



LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: 1005286





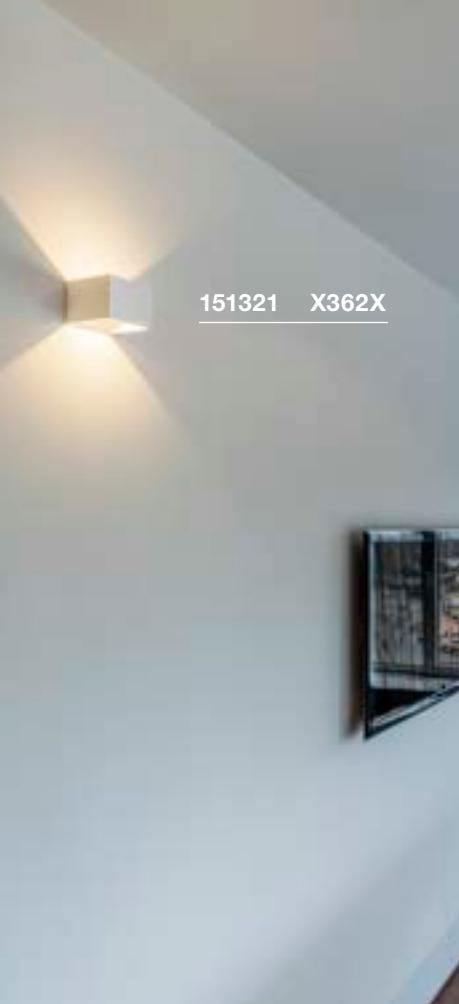


151321 X362X

LOGS IN
WL

LOGS IN
WL, PHASE



1000638 362



100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium



CRI
90

Down

300lm | 3000K
470lm



220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium



CRI
90

Down




430-690lm | 2000-3000K

Options	Prod. no.
<input checked="" type="radio"/> black/gold 300lm	151320
<input type="radio"/> white 470lm	151321

Options	Prod. no.
<input checked="" type="radio"/> black/gold 430lm	1000638
<input type="radio"/> white 690lm	1000639
<input type="radio"/> aluminium/white 690lm	1000640



1002843 363

LOGS IN L
WL, PHASELOGS IN L
WL, PHASE

220-240V ~50/60Hz | 500mA
 Total wattage: 18W
 Material: aluminium



220-240V ~50/60Hz | 500mA
 Total wattage: 21W
 Material: aluminium

1002928 363

CRI
90

Down 1100lm | 3000K
 1600lm

CRI
90

Down 1000lm | 2000-3000K

Options	Prod. no.
<input checked="" type="radio"/> black/gold 1100lm	1002842
<input type="radio"/> white 1600lm	1002844
<input type="radio"/> aluminium/white 1600lm	1002843

Options	Prod. no.
<input checked="" type="radio"/> black/gold 1000lm	1002928
<input type="radio"/> white 1390lm	1002929



1003467 364




QUAD FRAME 14 WL



QUAD FRAME 19 WL



1003468 364




100-240V ~50/60Hz | 350mA

Total wattage: 4.4W

Material: aluminium



Down 165lm | 2700K | 175lm | 3000K



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium



Down 580lm | 2700K | 640lm | 3000K

Options

white

Prod. no.

1003467

Prod. no.

1003468







**SHELL 15
WL, PHASE**

1000422 365



**SHELL 30
WL, PHASE**



220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium/acrylic

1000423 365



Down

1400lm | 3000K



Down

5600lm | 3000K

Options

white

Prod. no.

1000422

Options


white

Prod. no.

1000423

ASSO 300
WL, PHASE

151275 **366**



151410 **366**



220-240V ~50/60Hz | 500mA

Total wattage: 12W

Material: aluminium/steel



Down

975lm | 3000K

Options **Prod. no.**

white

151271

aluminium/white **151275**







ASSO 300 WL, PHASE



OSSA 180 WL, QT-DE12



OSSA 300 WL, QT-DE12



220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel



220-240V ~50/60Hz
Material: aluminium/steel



220-240V ~50/60Hz
Material: aluminium/steel



Down 1340lm | 2000-3000K



Base: 1xR7s 78mm



Base: 1xR7s 118mm

Options	Prod. no.
<input type="radio"/> white	1000634

Options	Prod. no.
<input checked="" type="radio"/> black	151450
<input type="radio"/> white	151451
<input type="radio"/> aluminium	151456

Options	Prod. no.
<input checked="" type="radio"/> black	151410




LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no.: **1005287**



LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h




Prod. no.: **1005288**

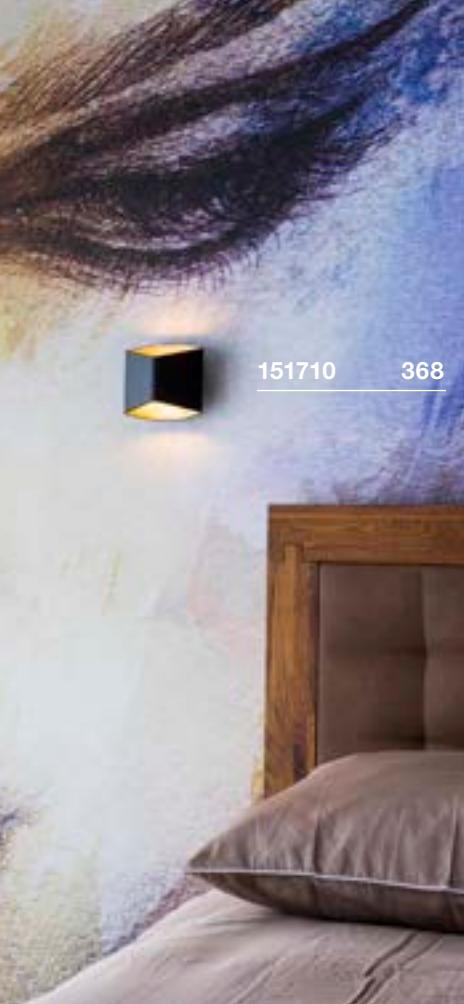

151710 **368**

CARISO WL, PHASE


CARISO WL, PHASE



220-240V ~50/60Hz | 500mA
Total wattage: 9,2W
Material: aluminium/steel



220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel

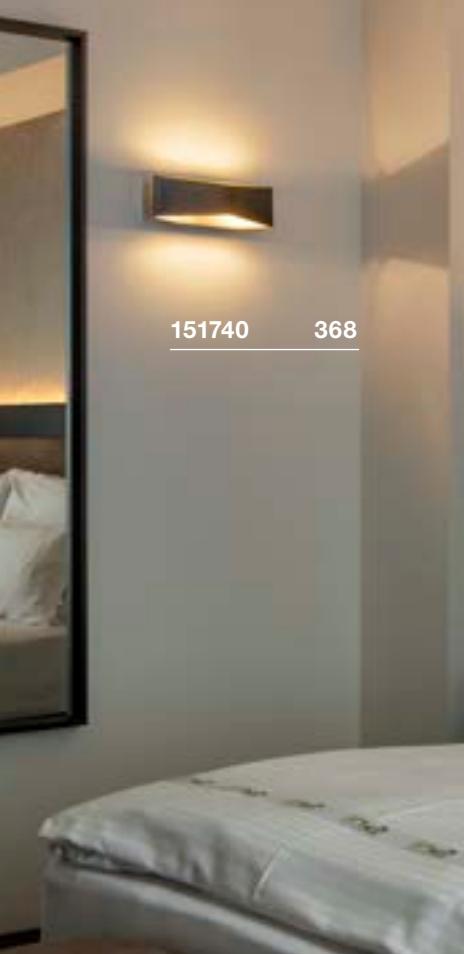

151740 **368**



Down 250lm | 2700K
 560lm | 3000K




Down 580lm | 1700-2700K
 1030lm | 2000-3000K

Options	Prod. no.
● black/gold 250lm 2700K	151710
○ white 560lm 3000K	151711

Options	Prod. no.
● black/gold 580lm 1700-2700K	151740
○ white 1030lm 2000-3000K	151741



CHROMBO WL, PHASE



220-240V ~50/60Hz | 350mA

Total wattage: 11W

Material: steel/glass





Down

700lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1003316
<input checked="" type="radio"/> grey	1003317

DIRETO 60 WL, PHASE





220-240V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium



Up 590lm | 2700K | Down 625lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1004740
<input type="radio"/> white	1004741

DIRETO 90 WL, PHASE




220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium




Up 840lm | 2700K | Down 880lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1004742
<input type="radio"/> white	1004743

1004740 **370**

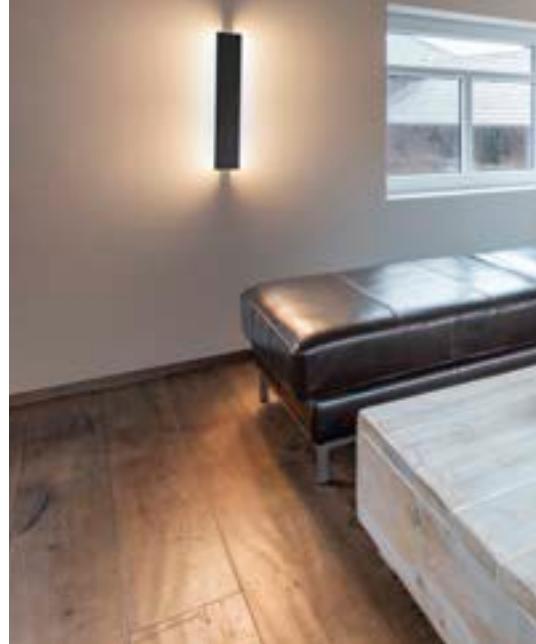


ARLINA 60
WLARLINA 130
WL

220-240V ~50/60Hz | 500mA
 Total wattage: 23W
 Material: aluminium/glass



Down

1550lm | 3000K



220-240V ~50/60Hz | 700mA
 Total wattage: 28W
 Material: aluminium/glass



Down

2400lm | 3000K



Options	Prod. no.
● aluminium	1002239

Options	Prod. no.
● aluminium	1002240



147529

373

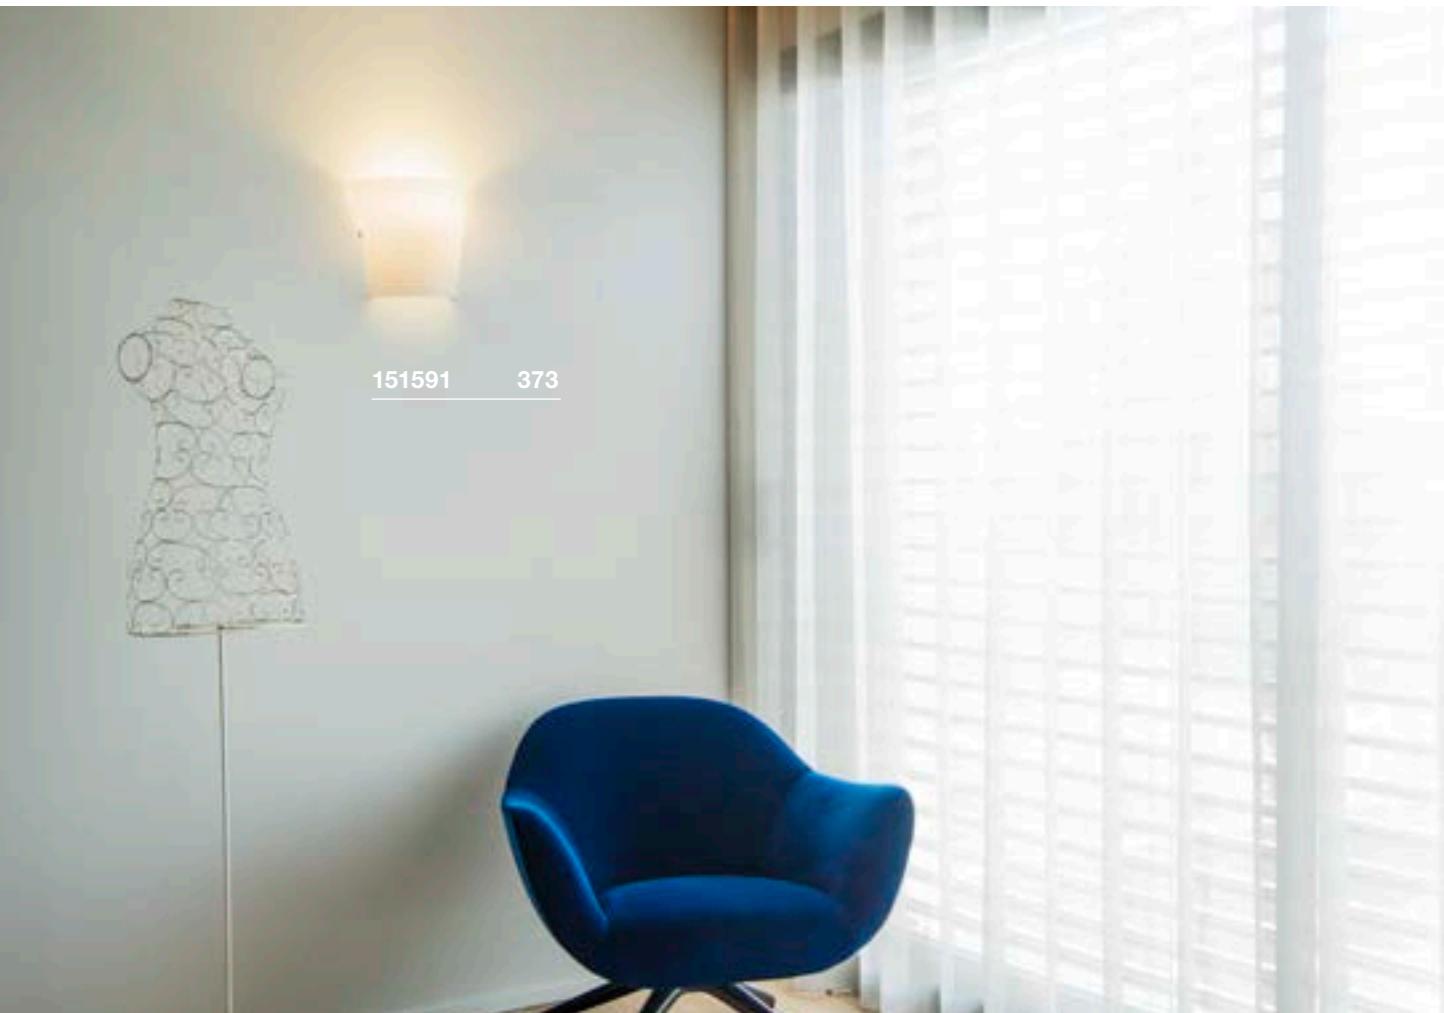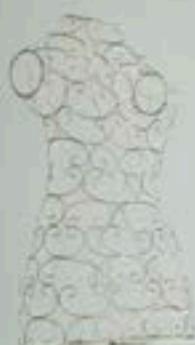


151591

373





ANDREAS
WL, QT-DE12



220-240V ~50/60Hz
Material: aluminium/steel



Base: 1xR7s 118mm

Options	Prod. no.
<input checked="" type="radio"/> black	1002927
<input type="radio"/> white	1002925




LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no.: 1005288



DENA 30
WL, E14



220-240V ~50/60Hz
Material: aluminium



Base: 2xE14 Max. Ø: 5.1 cm L: 9.6 cm

Options	Prod. no.
<input checked="" type="radio"/> aluminium	147529





C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



BASKET
WL, E27



220-240V ~50/60Hz
Material: glass



Base: 1xE27 Max. Ø: 5.2 cm L: 15.2 cm

Options	Prod. no.
<input checked="" type="radio"/> white	151591




LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h


Prod. no.: 1005289



1003429 375

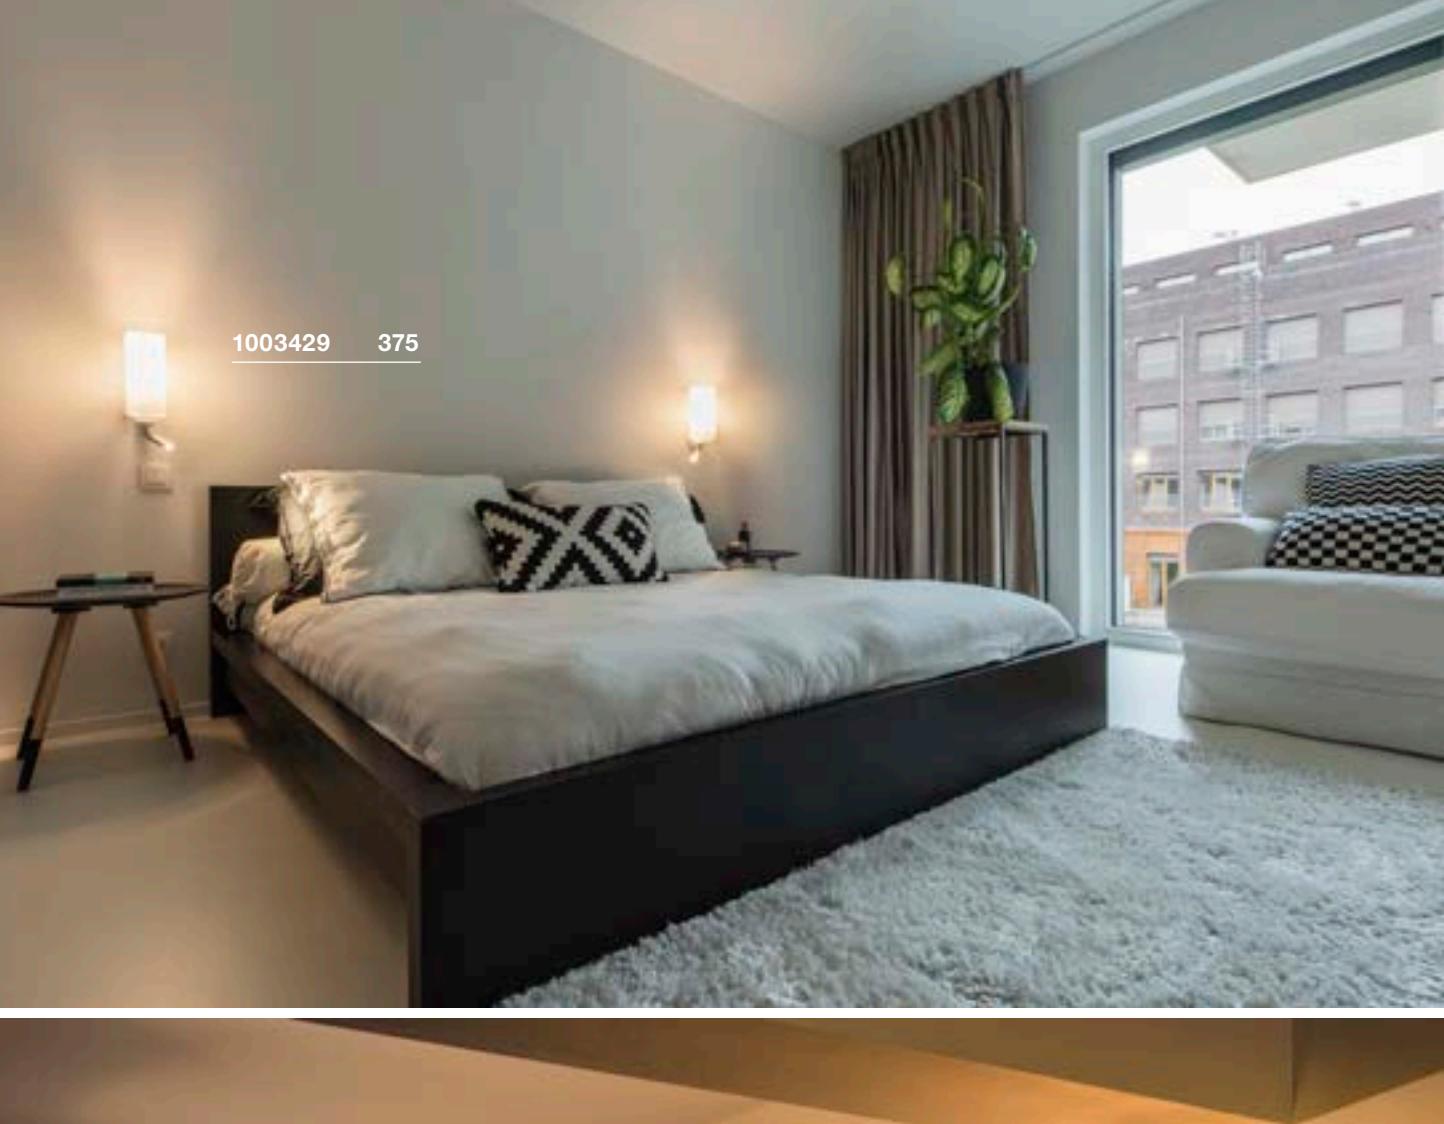


155752 375

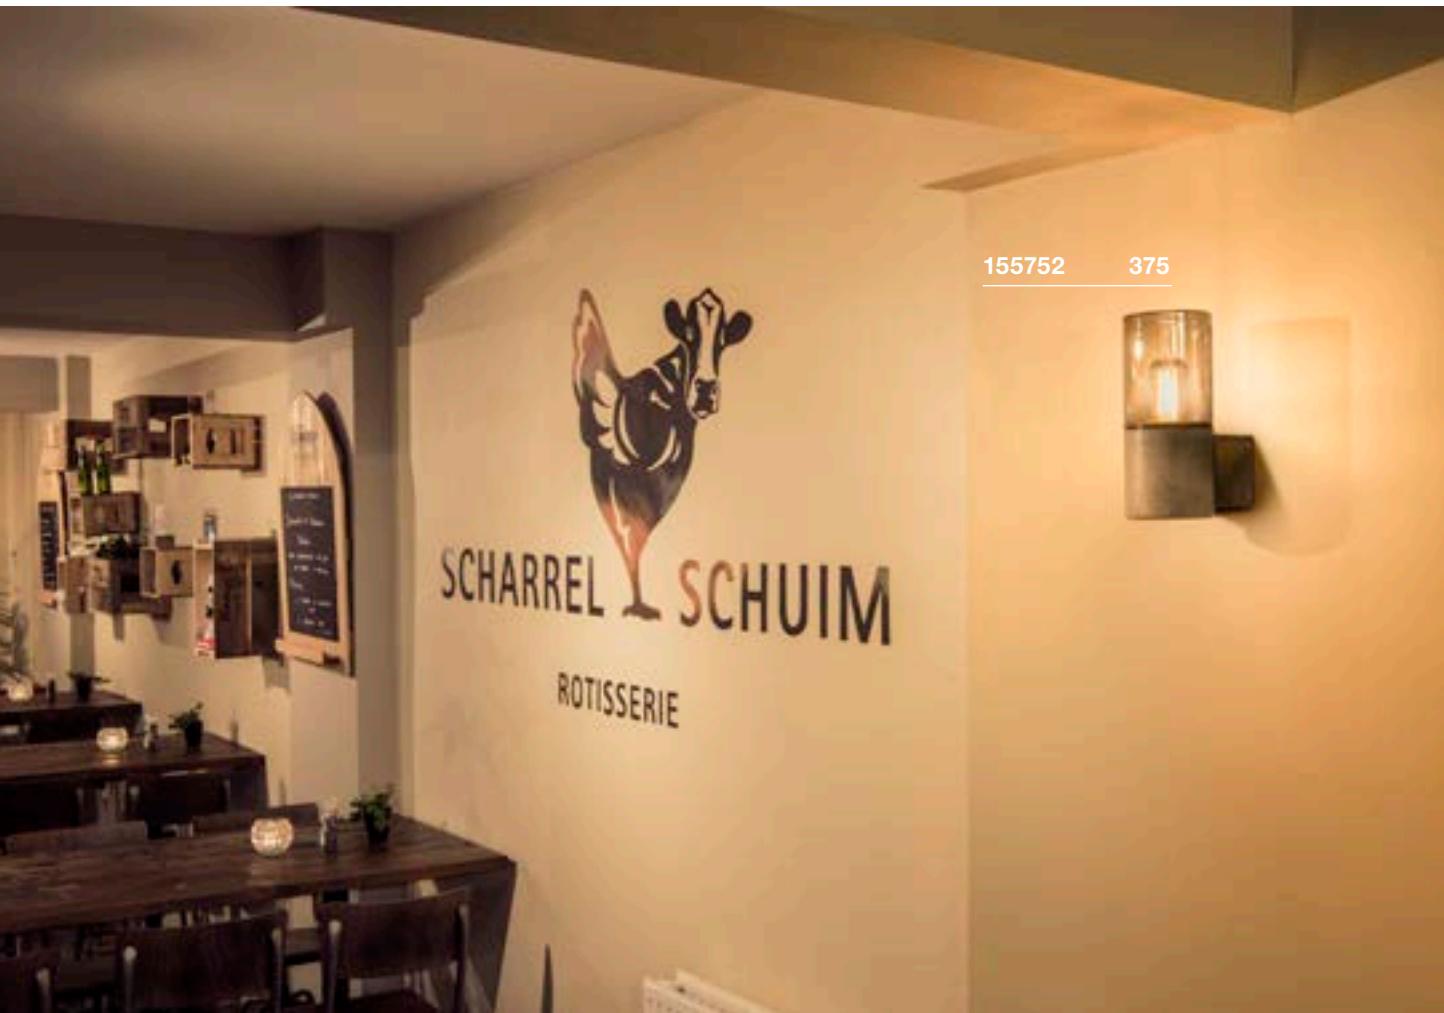




QUADRASS WL, E27



220-240V ~50/60Hz
Material: steel/glass



100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass



220-240V ~50/60Hz
Material: basalt/glass

- Switch on light housing
- Lightbulbs can be switched on/off separately



Base: 1xE27 Max. Ø: 6.5 cm L: 18 cm



Down 200lm | 3000K



Base: 1xE27 Max. Ø: 5.9 cm L: 15 cm



Base: 1xE27 Max. Ø: 6.5 cm L: 18 cm

Options	Prod. no.
<input checked="" type="radio"/> black/opaque	1003430
<input type="radio"/> white/opaque	1003431


LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302

Options	Prod. no.
<input checked="" type="radio"/> black	1003428
<input type="radio"/> white	1003429


A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303




Options	Prod. no.
<input checked="" type="radio"/> grey/brown	155752


LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289


FITU
Wall bracket

FITU CUBE
WL, E27



Material: steel



- See page 295 for matching pendant lights



220-240V ~50/60Hz

Material: steel

1004682 376

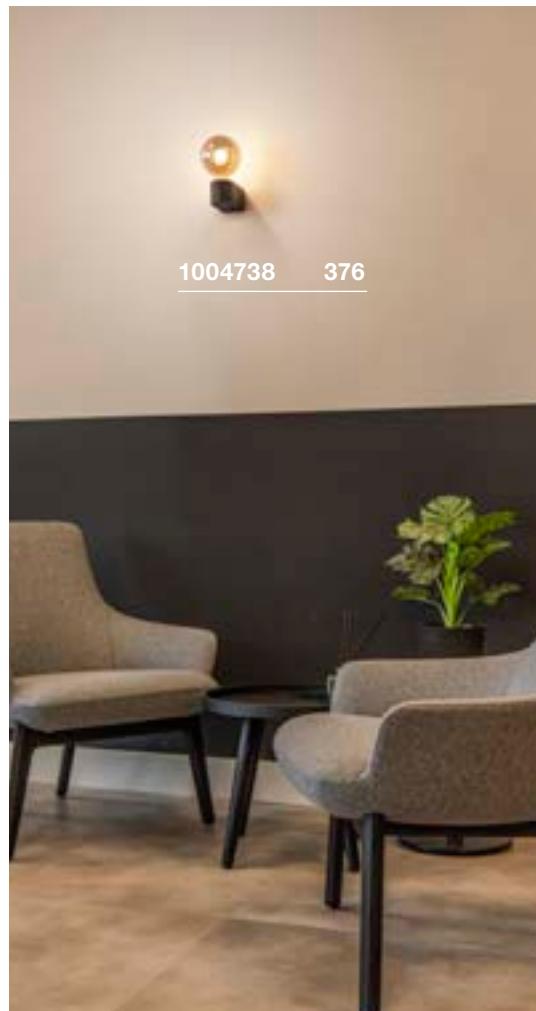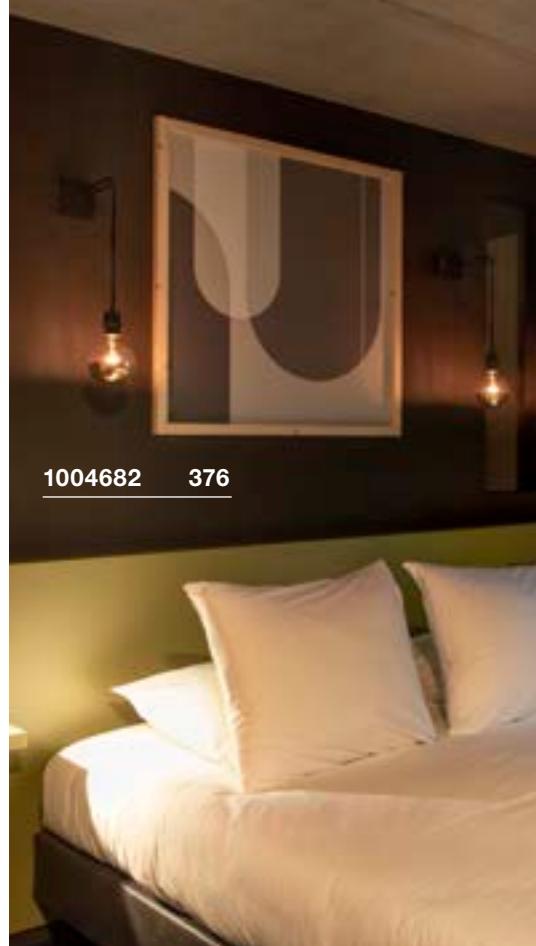

Options	Prod. no.
● black	1004682

Options	Prod. no.
● black	1004738
○ white	1004739



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: **1005305**





**THEO UP/DOWN
WL, QPAR51**

1000327 **377**



**SOLID CUBE
WL, QT14**



220-240V ~50/60Hz
Material: aluminium



220-240V ~50/60Hz
Material: concrete



Base: 2xGU10

1000910 **377**



Options	Prod. no.
● anthracite	1000330
○ white	1000327
● aluminium	1000329



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Base: 1xG69

Options	Prod. no.
● grey	1000910
● black	1000911



LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: **1005286**



151803

379









ENOLA B
WL, QPAR51



ENOLA B
WL, QPAR51



ASTINA UP/DOWN
WL, QPAR51




220-240V ~50/60Hz
Material: aluminium/steel

- Switch on light housing




Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1000729
<input type="radio"/> white	1000730



220-240V ~50/60Hz
Material: aluminium/steel

Options	Prod. no.
<input checked="" type="radio"/> black	151800
<input type="radio"/> white	151801
<input checked="" type="radio"/> gold	151803



220-240V ~50/60Hz
Material: aluminium/steel

Options	Prod. no.
<input checked="" type="radio"/> black	1002933
<input type="radio"/> white	1002931



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**



Product
Decorative ring, black
 black

Prod. no.
151840



Product
Decorative ring, black
 black

Prod. no.
151840


FENDA
WL, Base, E27




FENDA
Half shade



W: 23 cm H: 30 cm D: 12 cm
Material: textile/steel



Options	Prod. no.
<input checked="" type="radio"/> black	1001273
<input checked="" type="radio"/> black/copper	1001274
<input type="radio"/> white	1001275
<input type="radio"/> beige	1001276



220-240V ~50/60Hz
Material: steel/plastic



Base: 1xE27 Max. Ø: 5.1 cm L: 20 cm

Options	Prod. no.
<input type="radio"/> white	1001272

 LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



1001272 + 1001273 380






149452 381



KENKUA SPOT WL, E27



COUPA FLEX WL



100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass

220-240V ~50/60Hz | 700mA
Total wattage: 3.2W
Material: steel/glass

- Light sources can be switched on/off separately at the light.

CRI
80

Down 200lm | 3000K

CRI
80

Down 140lm | 3000K



<40 W

Base: 1xE27 Max. Ø: 6.5 cm L: 12 cm



<42 W

Base: 1xG69 max. L: 9 cm

Options	Prod. no.
● chrome	1002855

Options	Prod. no.
● chrome/opaque	149452



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303




LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: 1005286



**KARPO MAGN
CW, single, PHASE**



220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: steel/aluminium


- Lamp head position can be adjusted via the magnetic bracket



Down 350lm | 3000K
430lm

Options	Prod. no.
● black 350lm	1004706
○ white 430lm	1004707

**KARPO GOOSE
WL**



220-240V ~50/60Hz | 12V
Total wattage: 5.8W
Material: aluminium/steel

- Light can be dimmed via switch on the lamp head



1002140 383



Down 380lm | 3000K
420lm



Options	Prod. no.
● black 380lm	1006162
○ white 420lm	1006161





KARPO 30 WL, single

1004707 382

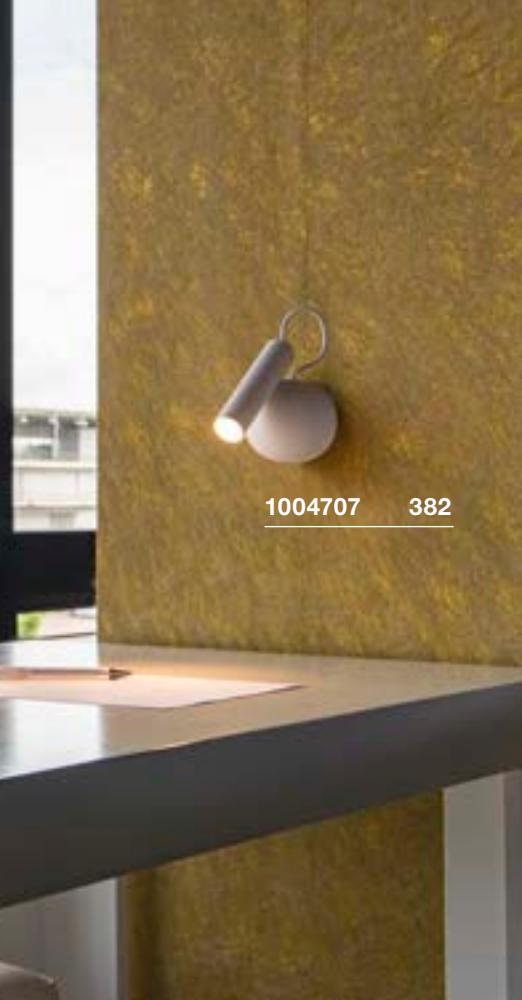


100-240V ~50/60Hz | 500mA

Total wattage: 6W

Material: aluminium/steel

- Switch on light housing



220-240V ~50/60Hz | 500mA

Total wattage: 6.8W

Material: aluminium

- 2 USB connections 1.5 A max
- 3 dimming levels via switch on base



Down

370lm | 3000K



Down

390lm | 3000K




Options	Prod. no.
<input checked="" type="radio"/> black 370lm	152340
<input type="radio"/> white 400lm	152341

Options	Prod. no.
<input type="radio"/> white	1002140





SOMNILA SPOT
WL, left

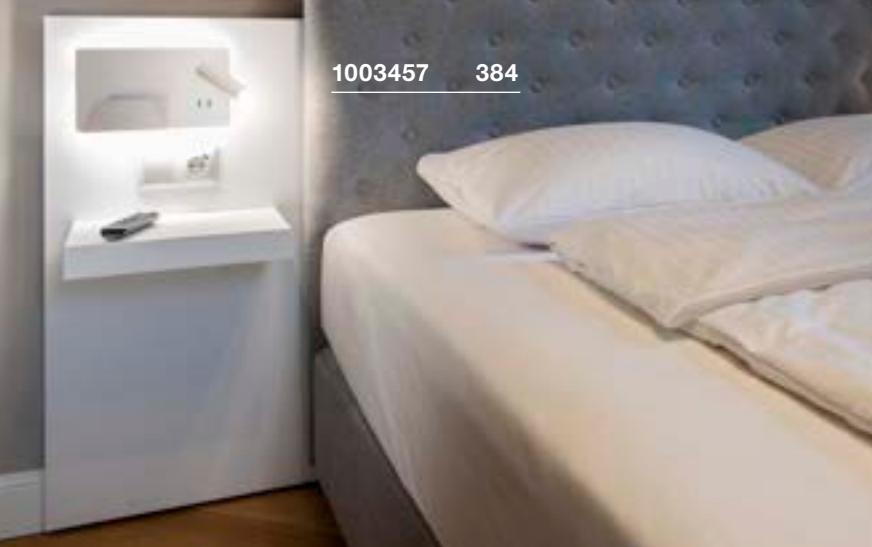

100-240V ~50/60Hz | 12V

Total wattage: 15W

Material: aluminium/steel

- 1 USB connection
- Light sources can be switched on/off separately on the housing



Down

120lm | 3000K

Options	Prod. no.
---------	-----------

<input checked="" type="radio"/> black	1003455
490lm	
<input type="radio"/> white	1003457



490lm

white

770lm



SOMNILA SPOT WL, right



100-240V ~50/60Hz | 12V

Total wattage: 15W

Material: aluminium/steel

- 1 USB connection
- Light sources can be switched on/off separately on the housing



CRI 90

Down

120lm | 3000K



CRI 90

Down

120lm | 3000K



CRI 90

Down

120lm | 3000K



<40 W

Base: 1xE27

max. L: 18 cm



<40 W

Base: 1xE27

max. L: 18 cm

Options	Prod. no.
<input checked="" type="radio"/> black 490lm	1003456
<input type="radio"/> white 770lm	1003458


Options	Prod. no.
<input type="radio"/> white	1003459

Options	Prod. no.
<input type="radio"/> white	1003460


1002608 387



1002118 387

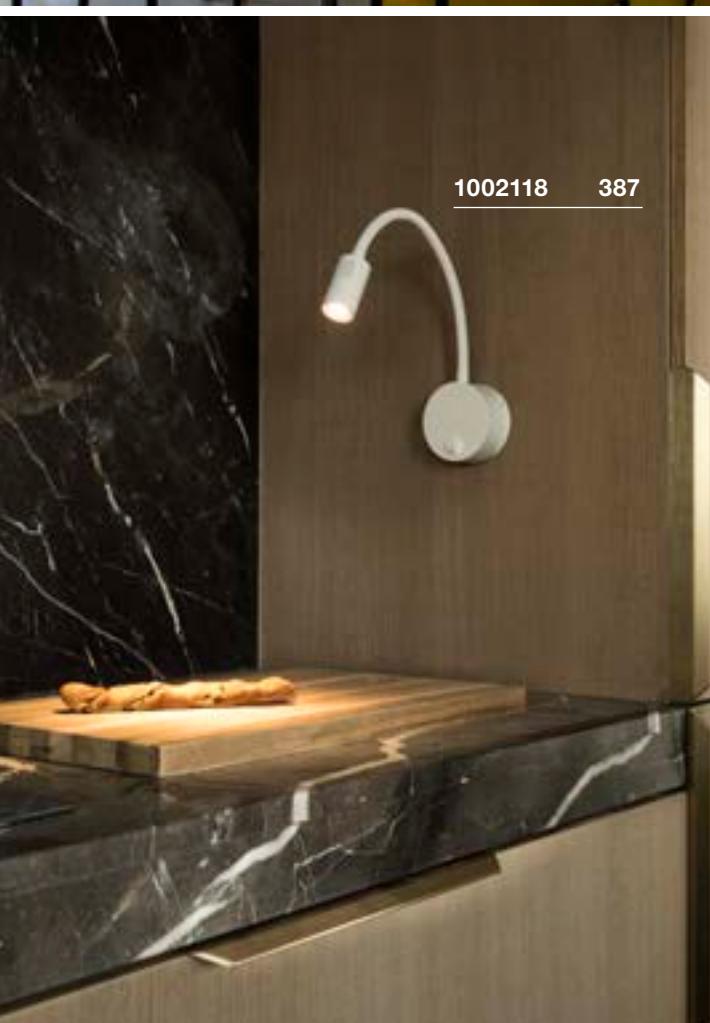

1002116 387

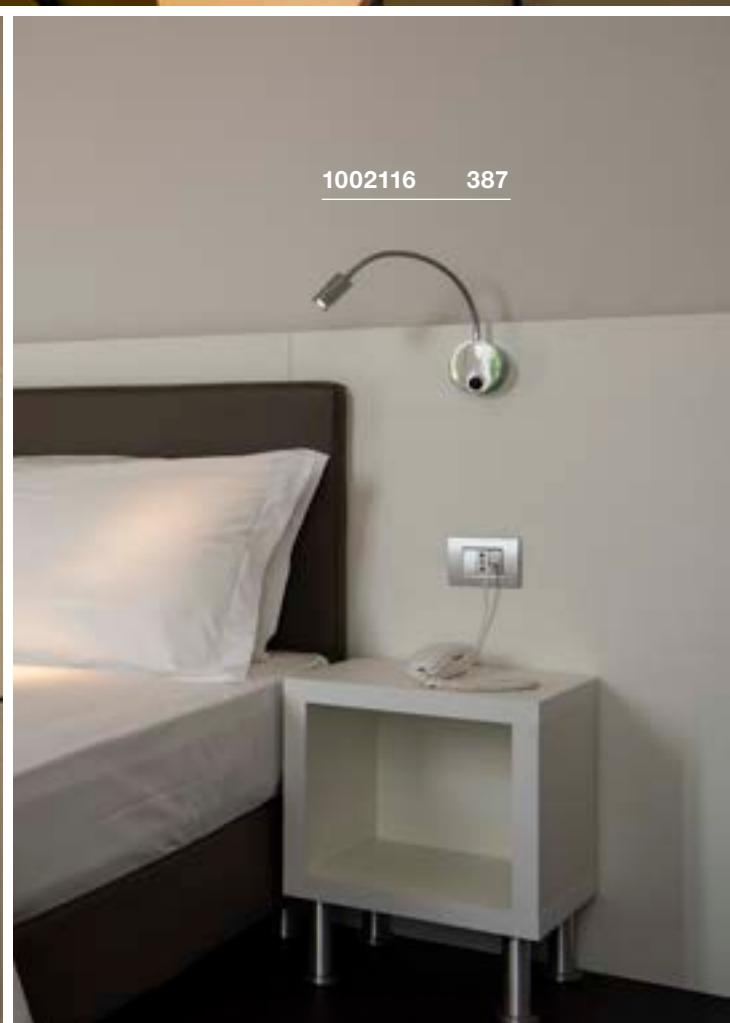






DIO FLEX PLATE WL QPAR51



DIO FLEX PLATE WL




DIO FLEX PLATE WL




220-240V ~50/60Hz
Material: aluminium

- Switch on light housing
- Decorative ring not included.



100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium/glass

- Switch on light housing



100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium/glass

- Switch on light housing



Base: 1xGU10



Down	100lm	2700K
		3000K
		4000K



Down	100lm	2700K
		3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002608
<input type="radio"/> white	1002607
<input checked="" type="radio"/> chrome	146692



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



Options	Prod. no.
<input checked="" type="radio"/> black 2700K	1002430
<input type="radio"/> white 2700K	1002117




Options	Prod. no.
<input checked="" type="radio"/> black 3000K	1002431
<input type="radio"/> white 3000K	1002118
<input checked="" type="radio"/> black 4000K	1002432
<input type="radio"/> white 4000K	1002119

Options	Prod. no.
<input checked="" type="radio"/> chrome 2700K	1002116
<input checked="" type="radio"/> chrome 3000K	146682

PHELIA
WL, QPAR51



MERADO FLOOD
WL, PHASE



220-240V ~50/60Hz
Material: aluminium/steel

- Switch on light body



Base: 1xGU10 Max. Ø: 5.1 cm L: 10.5 cm



Down 3000lm | 3000K
3200lm | 4000K

Options	Prod. no.
● black	148540



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Options	Prod. no.
○ white 3000lm 3000K	1001468
○ white 3200lm 4000K	1001472





1001468 388






DISPLAY ADL 50
QPAR51



220-240V ~50/60Hz
Material: aluminium/brass

- Open cable end
- Connection box included

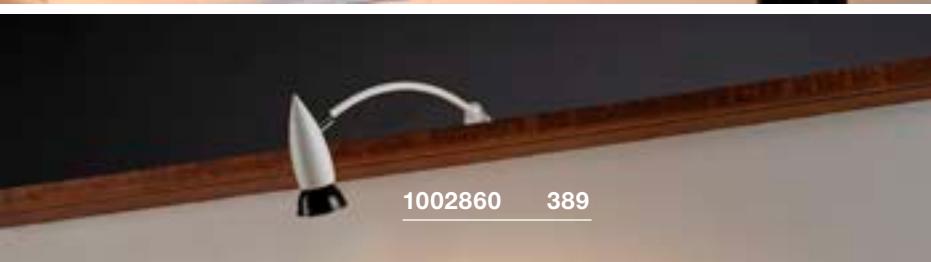

1002860 389



Base: 1xGU10

Options	Prod. no.
<input type="radio"/> white	1002860
<input checked="" type="radio"/> chrome	146332



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no.: 1005273



NUMINOS®
can be found
on family pages
98–101



MEDO®
can be found
on family pages
148–163



ONE®
can be found
on family pages
192–193



SØCKET
PANTILO
ROPE 19 | 393



LED
CYFT | 395



SØCKET
ASTO TUBE | 395



SØCKET
ASTO TUBE | 397



SØCKET
ASTO TUBE | 399



LED
OCULUS | 399



LED
KARPO 30 | 399



LED
NOBLO® | 401



LED
NOBLO® | 401



LED
KALU | 403



LED
KALU | 403



LED
KALU | 403



SØCKET
KALU | 403



SØCKET
KALU | 405



SØCKET
KALU | 405



SØCKET
KALU | 405



SØCKET
KALU | 405



SØCKET
ENOLA B | 407



SØCKET
ENOLA B | 407



SØCKET
ENOLA B | 407



SØCKET
ALTRA DICE | 408



SØCKET
SPOT 79 | 409



SØCKET
INDA | 409



SØCKET
PURÍ | 411



SØCKET
PURÍ | 411



SØCKET
PURÍ | 411



SØCKET
PURÍ | 411



SØCKET
AVO | 413



SØCKET
AVO | 413



SØCKET
AVO | 413



SØCKET
AVO | 413



SØCKET
AVO | 415



SOCKET ASTO 415	SOCKET ASTO 415	SOCKET ASTO 415	LED SENDER 12 417	LED SENDER 18 417	LED SENDER 24 417
LED SENDER 12 419	LED SENDER 18 419	LED SENDER 24 419	LED SIMA 420	LED SIMA 420	LED SIMA 421
LED SIMA 421	LED LIPSY® 30 423	LED LIPSY® 40 423	LED LIPSY® 50 423	LED LIPSY® 30 425	LED LIPSY® 40 425
LED LIPSY® 50 425	LED LIPSY® 40 426	LED LIPSY® 50 426	SOCKET MELAN 427	SOCKET GLASSA 427	LED BATTEN 60 429
LED BATTEN 120 429	LED LONG GRILL 430	LED SIGHT 60 431	LED SIGHT 115 431	LED BENA 120 433	LED BENA 150 433



1007591 393







PANTILO ROPE 19
CW, E27



PANTILO ROPE 27
CW, E27



200-240V ~50/60Hz
Material: glass/steel/hemp



200-240V ~50/60Hz
Material: glass/steel/hemp



Base: 1xE27 Max. Ø: 10 cm L: 11 cm



Base: 1xE27 Max. Ø: 15 cm L: 11 cm

Options	Prod. no.
● amber/gold	1007592
● anthracite/silver	1007593

Options	Prod. no.
● amber/gold	1007591
● anthracite/silver	1007590



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305

1006439 395





CYFT CW







NEW

ASTO TUBE CL, single, GU10



NEW



220-240V ~50/60Hz | 500mA

Total wattage: 6.5W

Material: aluminium

220-240V ~50/60Hz

Material: aluminium



330lm | 2700K | 350lm | 3000K | 380lm | 4000K



Base: 1xGU10

Options	Prod. no.
● black	1007608 ●

Options	Prod. no.
● black	1006439 ●
○ white	1006440 ●

CYFT Decorative ring



NEW

H: 2.45 cm
Diameter: 13.10 cm
Material: steel

ASTO TUBE Decorative reflector



NEW

H: 3.95 cm
Diameter: 6.75 cm
Material: polycarbonate (PC)

Options	Prod. no.
○ white	1007611 ●
● brass	1007610 ●
● chrome	1007609 ●

Options	Prod. no.
● black/chrome	1007190 ●
● gold	1006450 ●
● chrome	1006449 ●
● copper	1006451 ●

1006423 397




1006428 397





ASTO TUBE

ASTO TUBE
CW, single, GU10ASTO TUBE
CW, double, GU10

220-240V ~50/60Hz
Material: aluminium



SOCKET INSIDE 10 W

Base: 2xGU10



LED GU10 | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005076

ASTO TUBE
Decorative reflectorASTO TUBE
CW, triple, GU10ASTO TUBE
CW, quadruple, GU10

NEW



H: 3.95 cm
Diameter: 6.75 cm
Material: polycarbonate (PC)



Options	Prod. no.
<input checked="" type="radio"/> black/chrome	1007190
<input type="radio"/> gold	1006450
<input type="radio"/> chrome	1006449
<input type="radio"/> copper	1006451

Options	Prod. no.
<input checked="" type="radio"/> black	1006427
<input type="radio"/> white	1006428

Options	Prod. no.
<input checked="" type="radio"/> black	1006429
<input type="radio"/> white	1006430



1004664 399



152331 399









OCULUS CW, PHASE



KARPO 30 CW, single



220-240V ~50/60Hz | 250mA

Total wattage: 11W

Material: aluminium/glass

220-240V ~50/60Hz | 500mA

Total wattage: 9.3W

Material: aluminium/steel

- Additional frosted lens included

CRI
90

Down 36lm | 2000K - 780lm | 3000K

CRI
90Down 560lm | 3000K
680lm

Options	Prod. no.
<input checked="" type="radio"/> black	1004664
<input type="radio"/> white	1004665

Options	Prod. no.
<input checked="" type="radio"/> black	152330
560lm	
<input type="radio"/> white	152331
680lm	




1002974 401





NOBLO®



220-240V ~50/60Hz | 350mA


Total wattage: 8W

Material: aluminium




Down	620lm 1240lm 1860lm	2700K 2700K 1860lm
------	---------------------------	--------------------------


NOBLO®
CW, single, PHASE



NOBLO®
CW, double, PHASE



NOBLO®
CW, triple, PHASE



Options	Prod. no.
<input checked="" type="radio"/> black 620lm 2700K 8W	1002969
<input type="radio"/> white 620lm 2700K 8W	1002970
<input type="radio"/> silver 620lm 2700K 8W	1002971

Options	Prod. no.
<input checked="" type="radio"/> black 1240lm 2700K 8W	1002973
<input type="radio"/> white 1240lm 2700K 8W	1002974
<input type="radio"/> silver 1240lm 2700K 8W	1002975

Options	Prod. no.
<input checked="" type="radio"/> black 1860lm 2700K 8W	1002976
<input type="radio"/> white 1860lm 2700K 8W	1002977
<input type="radio"/> silver 1860lm 2700K 8W	1002978

1000131 403





KALU





220-240V ~50/60Hz | 350mA

Total wattage: 17W

Material: aluminium/polycarbonate (PC)





Down	1000lm 2000lm 3000lm 4000lm	3000K
------	--------------------------------------	-------

KALU
CW, single, PHASEKALU
CW, double, PHASE

Options	Prod. no.
<input checked="" type="radio"/> black 1000lm 3000K 17W	1000127
<input type="radio"/> white 1000lm 3000K 17W	1000128

Options	Prod. no.
<input checked="" type="radio"/> black 2000lm 3000K 17W	1000129
<input type="radio"/> white 2000lm 3000K 17W	1000130

KALU
CW, triple, PHASEKALU
CW, quad, PHASE

Options	Prod. no.
<input checked="" type="radio"/> black 3000lm 3000K 17W	1000131
<input type="radio"/> white 3000lm 3000K 17W	1000132


Options	Prod. no.
<input checked="" type="radio"/> black 4000lm 3000K 17W	1000135
<input type="radio"/> white 4000lm 3000K 17W	1000136

147321 405





KALU



220-240V ~50/60Hz
Material: aluminium



SOCKET INSIDE <75 W

Base: 1xGU10





QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no.: 1005274

KALU
CW, single, QPAR111KALU
CW, double, QPAR111

Options	Prod. no.
● black	1000702
○ white	147301
● aluminium	147306

Options	Prod. no.
● black	1000703
○ white	147311
● aluminium	147316

KALU
CW, triple, QPAR111KALU
CW, quad, QPAR111

Options	Prod. no.
● black	1000704
○ white	147321
● aluminium	147326





Options	Prod. no.
● black	1002023
○ white	1002024
● aluminium	1002025

152010 407




ENOLA B
CW, single, QPAR51

ENOLA B
CW, double, QPAR51

ENOLA B
CW, double, QPAR51


220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light colour included.
- Optional black decorative ring available as an accessory.



Base: 1xGU10 max. L: 6.7 cm

Options	Prod. no.
● black	152010
○ white	152011



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Base: 2xGU10 max. L: 6.7 cm

Options	Prod. no.
● black	152020
○ white	152021



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Base: 2xGU10 max. L: 8 cm

Options	Prod. no.
● black	151830
○ white	151831



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Product	Prod. no.
Decorative ring ● black	151840





Product	Prod. no.
Decorative ring ● black	151840



Product	Prod. no.
Decorative ring ● black	151840

1002215 408

ALTRA DICE
CW, double, QPAR51



220-240V ~50/60Hz
Material: aluminium/steel

SOCKET
INSIDE <50
W

Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1002215
<input type="radio"/> white	151531
<input type="radio"/> grey	151534





LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEE=G
6kWh/1000h



Prod. no.: 1005273



147551 409



SPOT 79
CW, QPAR51220-240V ~50/60Hz
Material: aluminiumSOCKET
INSIDE <50 W

Base: 1xGU10 Max. Ø: 5.1 cm L: 5.7 cm

Options	Prod. no.
● black	132020
○ white	132021
● grey	132024

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077

INDA
CW, QPAR51220-240V ~50/60Hz
Material: aluminiumSOCKET
INSIDE <50 W


Base: 1xGU10 Max. Ø: 5.1 cm L: 5.7 cm

Options	Prod. no.
● black	147550
○ white	147551
● aluminium	147559

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



**PURI****PURI**
CW, single, QPAR51**PURI**
CW, double, QPAR51

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring included.



SOCKET INSIDE <50 W



Base: 1xGU10



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h





Prod. no.: 1005077



Options	Prod. no.
<input checked="" type="radio"/> black	147360
<input type="radio"/> white	147361


Options	Prod. no.
<input checked="" type="radio"/> black	147370
<input type="radio"/> white	147371

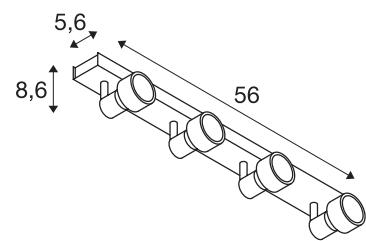PURI
CW, triple, QPAR51**PURI**
CW, quad, QPAR51

Options	Prod. no.
<input checked="" type="radio"/> black	147380
<input type="radio"/> white	147381

Options	Prod. no.
<input checked="" type="radio"/> black	1002029
<input type="radio"/> white	1002030



**AVO****AVO**
CW, single, QPAR51**AVO**
CW, double, QPAR51

220-240V ~50/60Hz
Material: steel





Base: 1xGU10





LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h

Prod. no.: 1005077



Options	Prod. no.
<input checked="" type="radio"/> black	1000886
<input type="radio"/> white	1000887

Options	Prod. no.
<input checked="" type="radio"/> black	1000889
<input type="radio"/> white	1000890

AVO
CW, triple, QPAR51**AVO**
CW, quad, QPAR51


Options	Prod. no.
<input checked="" type="radio"/> black	1000892
<input type="radio"/> white	1000893

Options	Prod. no.
<input checked="" type="radio"/> black	1000895
<input type="radio"/> white	1000896

147443

415



**ASTO**

220-240V ~50/60Hz
Material: aluminium





Base: 1xGU10





LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h

Prod. no.: 1005075

**ASTO**
CW, single, QPAR51**ASTO**
CW, double, QPAR51

Options	Prod. no.
● aluminium	147441


Options	Prod. no.
● aluminium	147442

ASTO
CW, triple, QPAR51**ASTO**
CW, quad, QPAR51

Options	Prod. no.
● aluminium	147443

Options	Prod. no.
● aluminium	147444



1004705 **417**

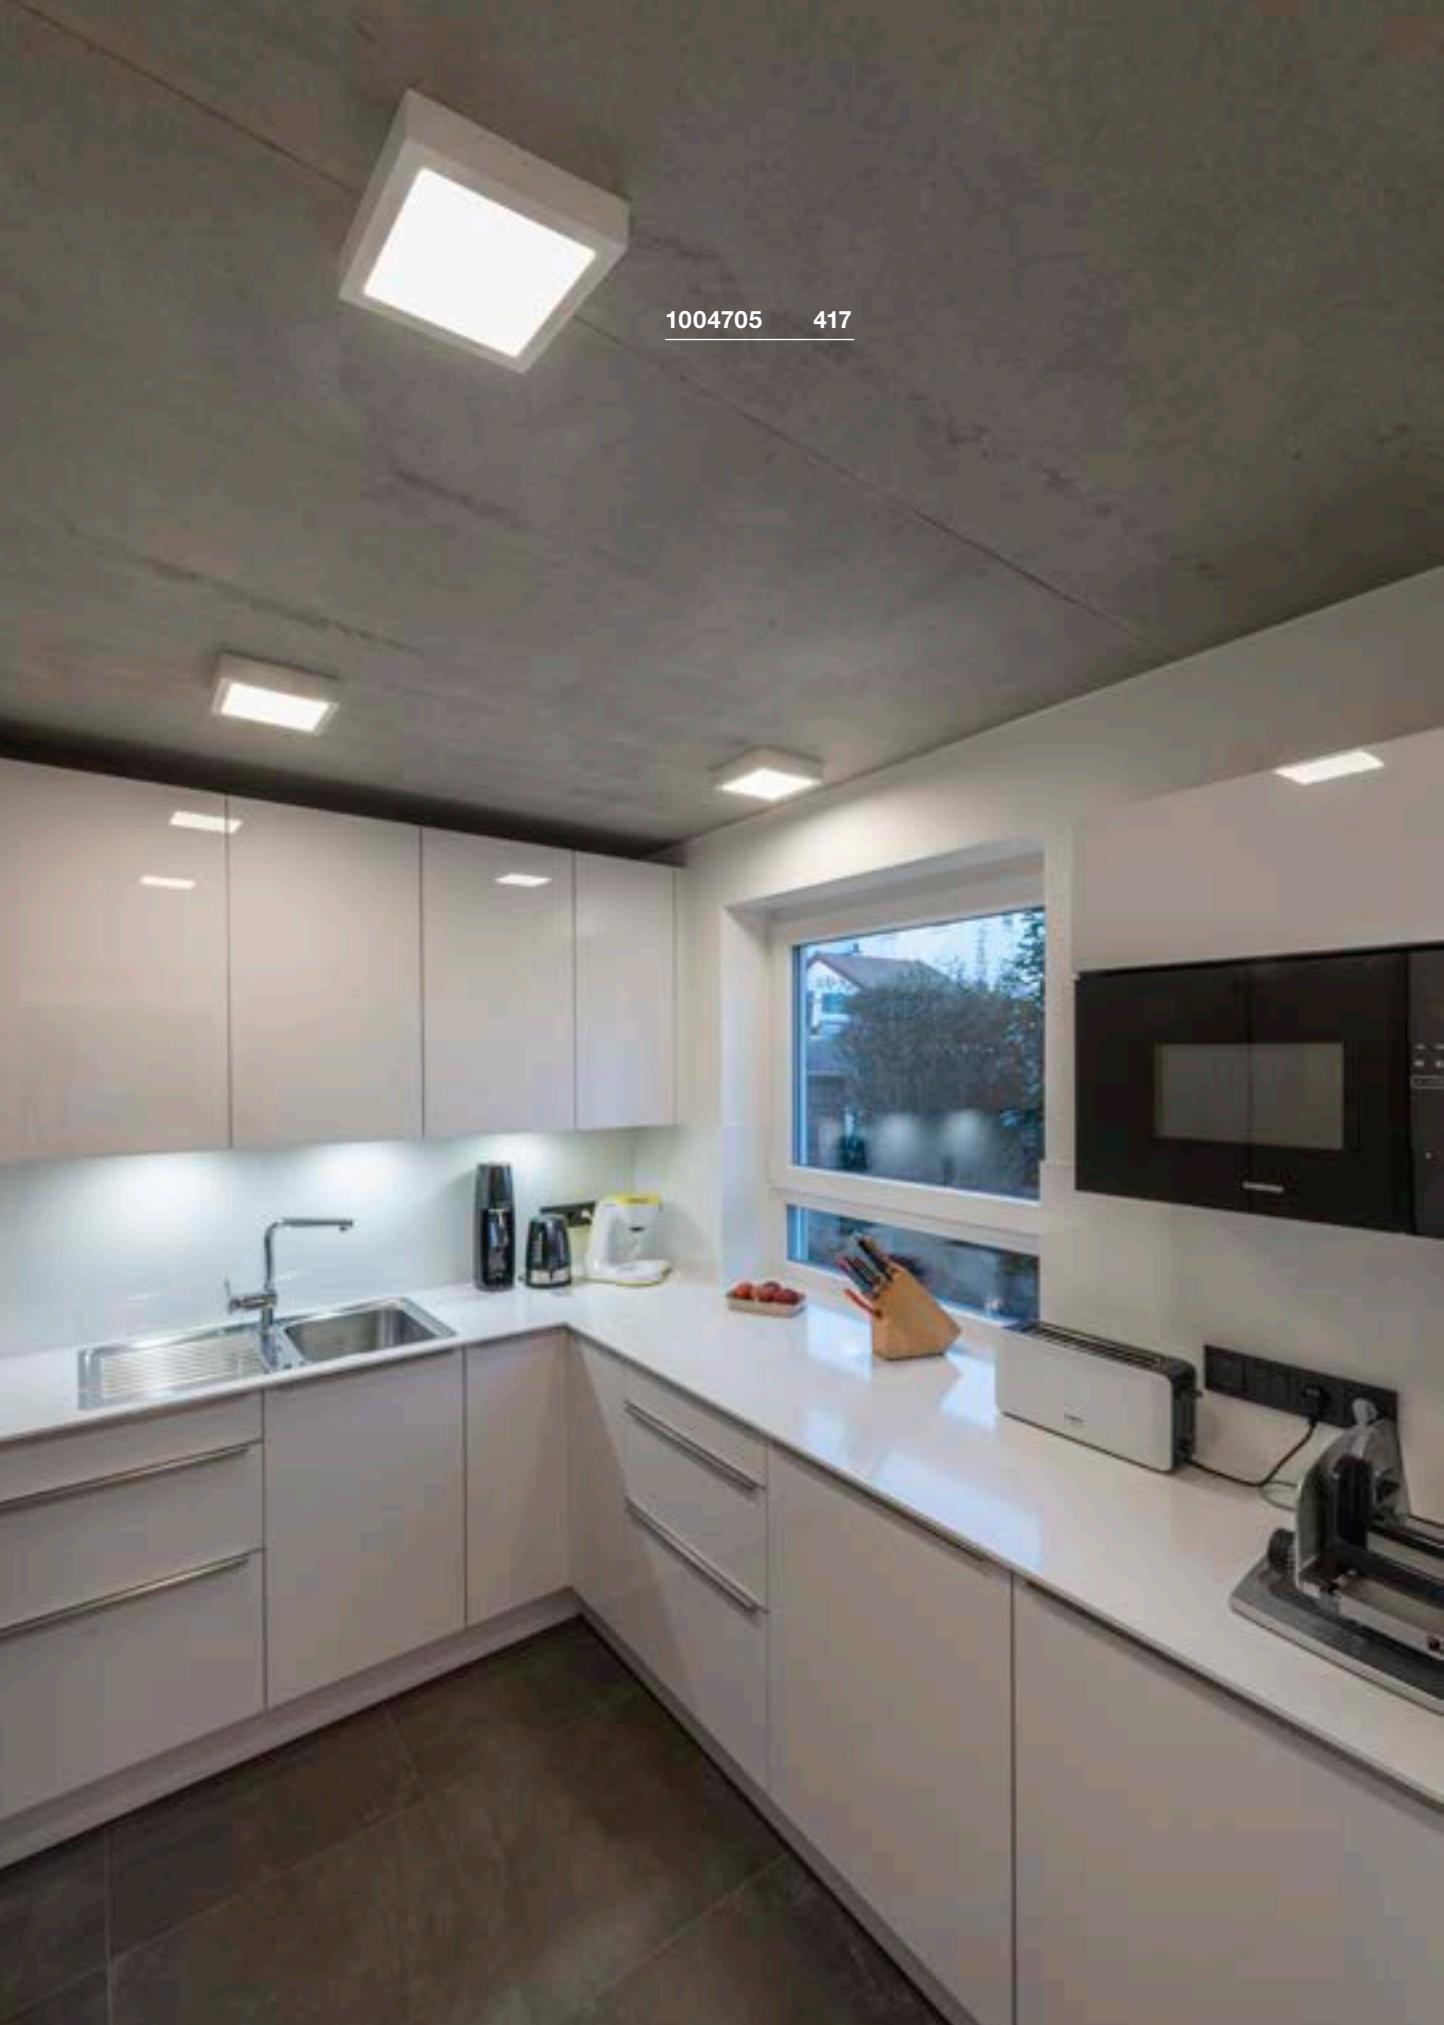



SENSOR 12

CW, square, PHASE





220-240V ~50/60Hz | 200mA

Total wattage: 8.4W

Material: aluminium

SENSOR 18

CW, square, PHASE




220-240V ~50/60Hz | 350mA

Total wattage: 13W

Material: aluminium

SENSOR 24

CW, square, PHASE



220-240V ~50/60Hz | 500mA

Total wattage: 15W

Material: aluminium



Down

460lm | 3000K



Down

840lm | 3000K



Down

1140lm | 3000K
1240lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1003017

Options	Prod. no.
<input type="radio"/> white	1003018



Options	Prod. no.
<input type="radio"/> white 1140lm 3000K	1003019
<input type="radio"/> white 1240lm 4000K	1004705

1003016 **419**





SENSOR 12 CW, round, PHASE





220-240V ~50/60Hz | 200mA

Total wattage: 8.4W

Material: aluminium

SENSOR 18 CW, round, PHASE





220-240V ~50/60Hz | 350mA

Total wattage: 13W

Material: aluminium

SENSOR 24 CW, round, PHASE



220-240V ~50/60Hz | 500mA

Total wattage: 15W

Material: aluminium



Down

460lm | 3000K
470lm | 4000K

Down

830lm | 3000K
990lm | 4000K

Down



1140lm | 3000K
1300lm | 4000K

Options	Prod. no.
<input type="radio"/> white 460lm 3000K 8.4W	1003014
<input type="radio"/> white 470lm 4000K 8.2W	1004700

Options	Prod. no.
<input type="radio"/> white 830lm 3000K 13W	1003015
<input type="radio"/> white 990lm 4000K 12W	1004701

Options	Prod. no.
<input type="radio"/> white 1140lm 3000K	1003016
<input type="radio"/> white 1300lm 4000K	1004702

SIMA
CW, round, Sensor





220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)



Down 2200lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1005086

SIMA
CW, round, PHASE





220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)



Down 2200lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1005085

163020 420


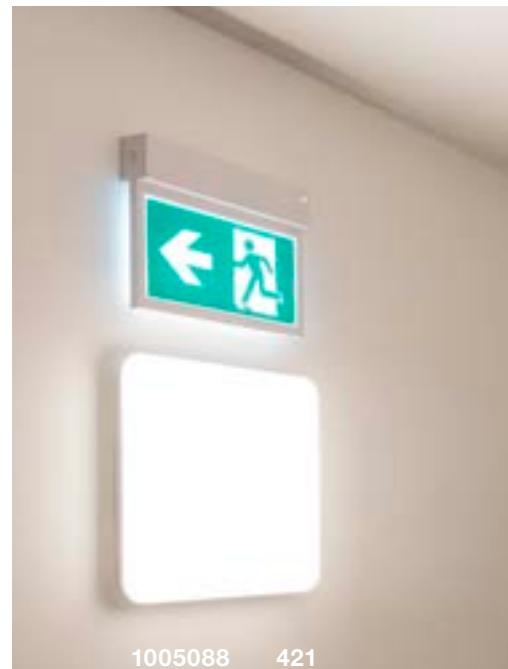
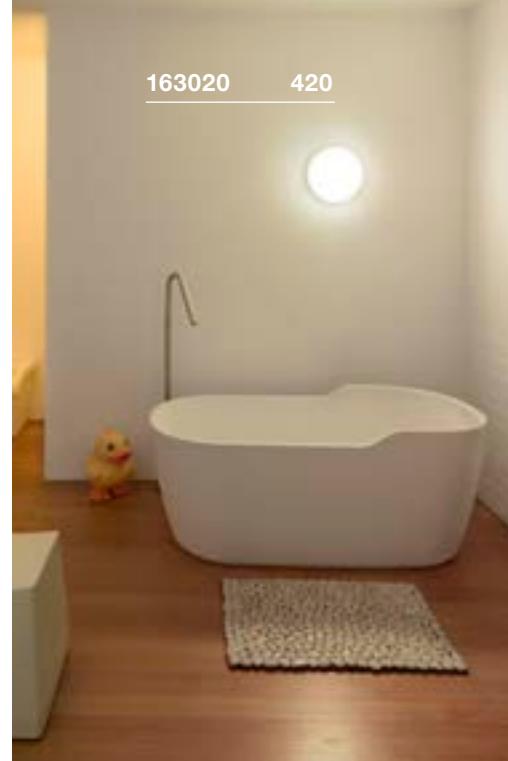


1005088 421



1005087 421


SIMA
CW, square, Sensor


SIMA
CW, square, PHASE


220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)



Down 2200lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1005088



220-240V ~50/60Hz | 320mA
Total wattage: 24W
Material: polycarbonate (PC)



Down 2200lm | 3000K

Options	Prod. no.
<input type="radio"/> white	1005087






1002021 **423**





LIPSY® 30
CW, Dome






220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)



Down 1550lm | 3000K | 1600lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002020

LIPSY® 40
CW, Dome






220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)



Down 2050lm | 3000K | 2200lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002021

LIPSY® 50
CW, Dome



220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)



Down 2500lm | 3000K | 2700lm | 4000K




Options	Prod. no.
<input type="radio"/> white	1002022

1002076 425





LIPSY® 30
CW, Drum






220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)



Down 1600lm | 3000K | 1650lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002075

LIPSY® 40
CW, Drum






220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)



Down 2100lm | 3000K | 2300lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002076

LIPSY® 50
CW, Drum




220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)



Down 2450lm | 3000K | 2600lm | 4000K




Options	Prod. no.
<input type="radio"/> white	1002077

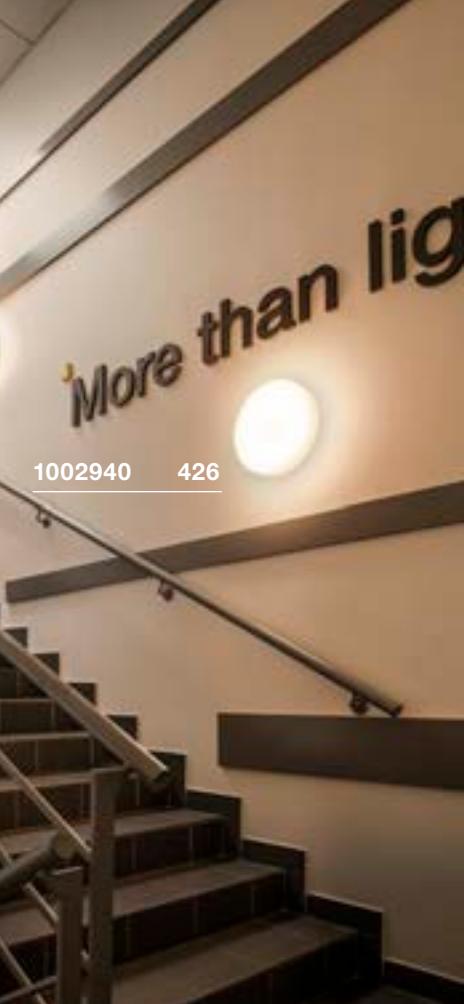

1002941 426



LIPSY® 40 CW, Drum, DALI






220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)



Down 2100lm | 3000K 2300lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002940

LIPSY® 50 CW, Drum, DALI



220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)





Down 2450lm | 3000K 2600lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1002941



155236 427

MELAN
CW, E27GLASSA
CW, square, E27220-240V ~50/60Hz
Material: aluminium/glass220-240V ~50/60Hz
Material: steel/glass

155180 427



Base: 1xE27 Max. Ø: 7 cm L: 16 cm

Options	Prod. no.
● aluminium	155236

A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



Base: 2xE27 Max. Ø: 4.8 cm L: 14.8 cm

Options	Prod. no.
○ transparent/chrome	155180

LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290





1006124 **429**



BATTEN 60 CW



BATTEN 120 CW



220-240V ~50/60Hz | 110mA

Total wattage: 9W

Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included





Down 940lm | 3000K | 980lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1006123



Product	Prod. no.
Direct connector	
<input type="radio"/> white	1006128
Feed-in	
<input type="radio"/> white	1006125
Mounting brackets	
<input type="radio"/> white	1006126
60 cm cable connector	
<input type="radio"/> white	1006127



220-240V ~50/60Hz | 220mA

Total wattage: 18W

Material: polycarbonate (PC)

- Switch on light housing
- Feed-in not included





Down 1900lm | 3000K | 1960lm | 4000K

Options	Prod. no.
<input type="radio"/> white	1006124



Product	Prod. no.
Direct connector	
<input type="radio"/> white	1006128
Feed-in	
<input type="radio"/> white	1006125
Mounting brackets	
<input type="radio"/> white	1006126
60 cm cable connector	
<input type="radio"/> white	1006127

LONG GRILL
CW



220-240V ~50/60Hz | 700mA


Total wattage: 20W






Material: aluminium/acrylic



Down 1600lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1001020
<input type="radio"/> white	1001019

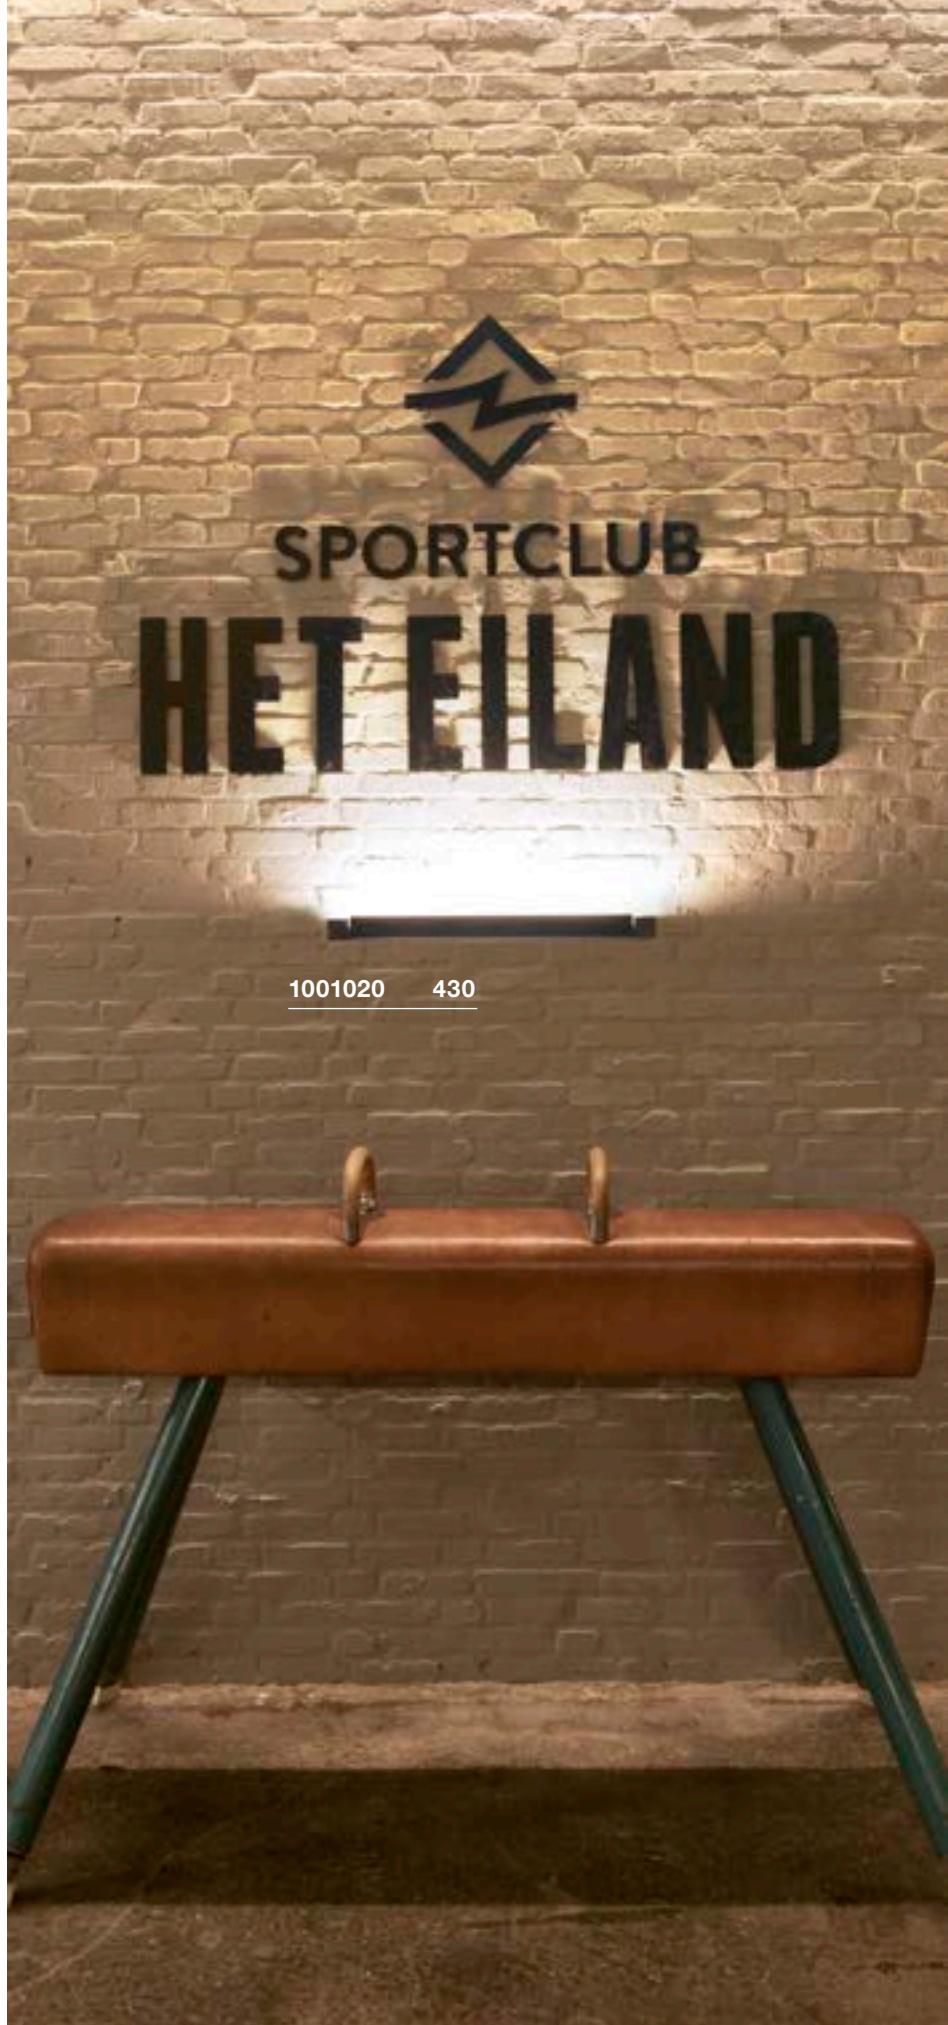

SIGHT 60
CWSIGHT 115
CW

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

- Switch on light housing



1001286 431

CRI
80

Down 1490lm | 3000K

CRI
80

Down 3100lm | 3000K




Options	Prod. no.
<input checked="" type="radio"/> black	1001283
<input type="radio"/> white	1001284

Options	Prod. no.
<input checked="" type="radio"/> black	1001286
<input type="radio"/> white	1001287





631337 433


BENA 120
CWBENA 150
CW

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: poly (methyl methacrylate)
(PMMA)/steel



Down

3800lm | 3000K



220-240V ~50/60Hz | 700mA
Total wattage: 36W
Material: poly (methyl methacrylate)
(PMMA)/steel



Down


5000lm | 3000K

Options	Prod. no.
<input type="radio"/> white	631337

Options	Prod. no.
<input type="radio"/> white	631339




1007697 439

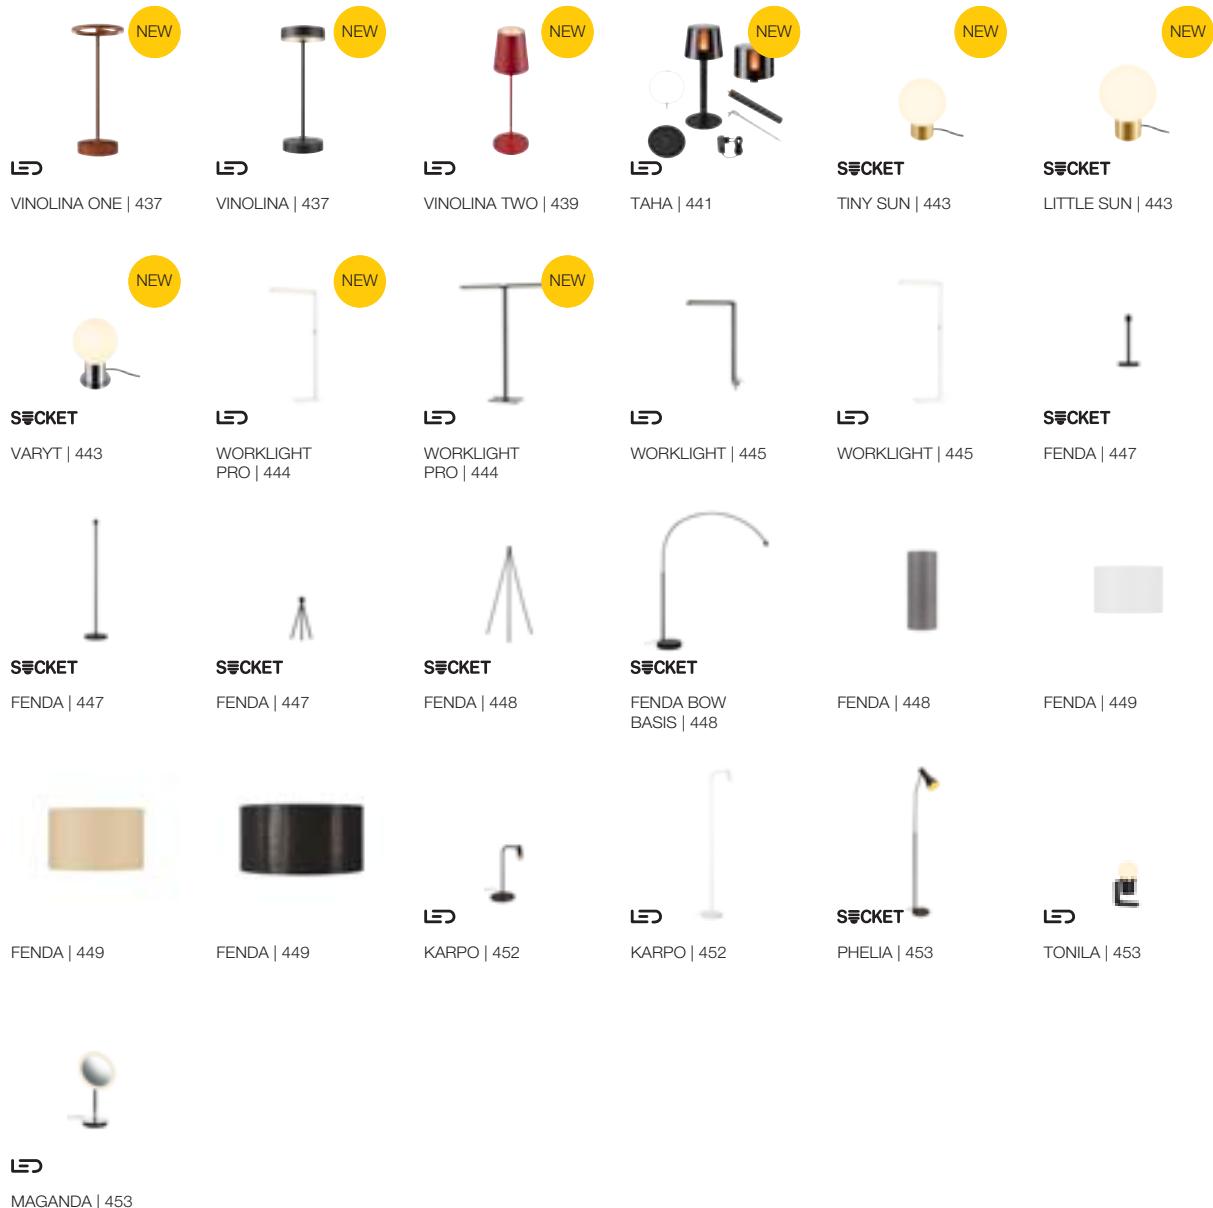



1007357 437

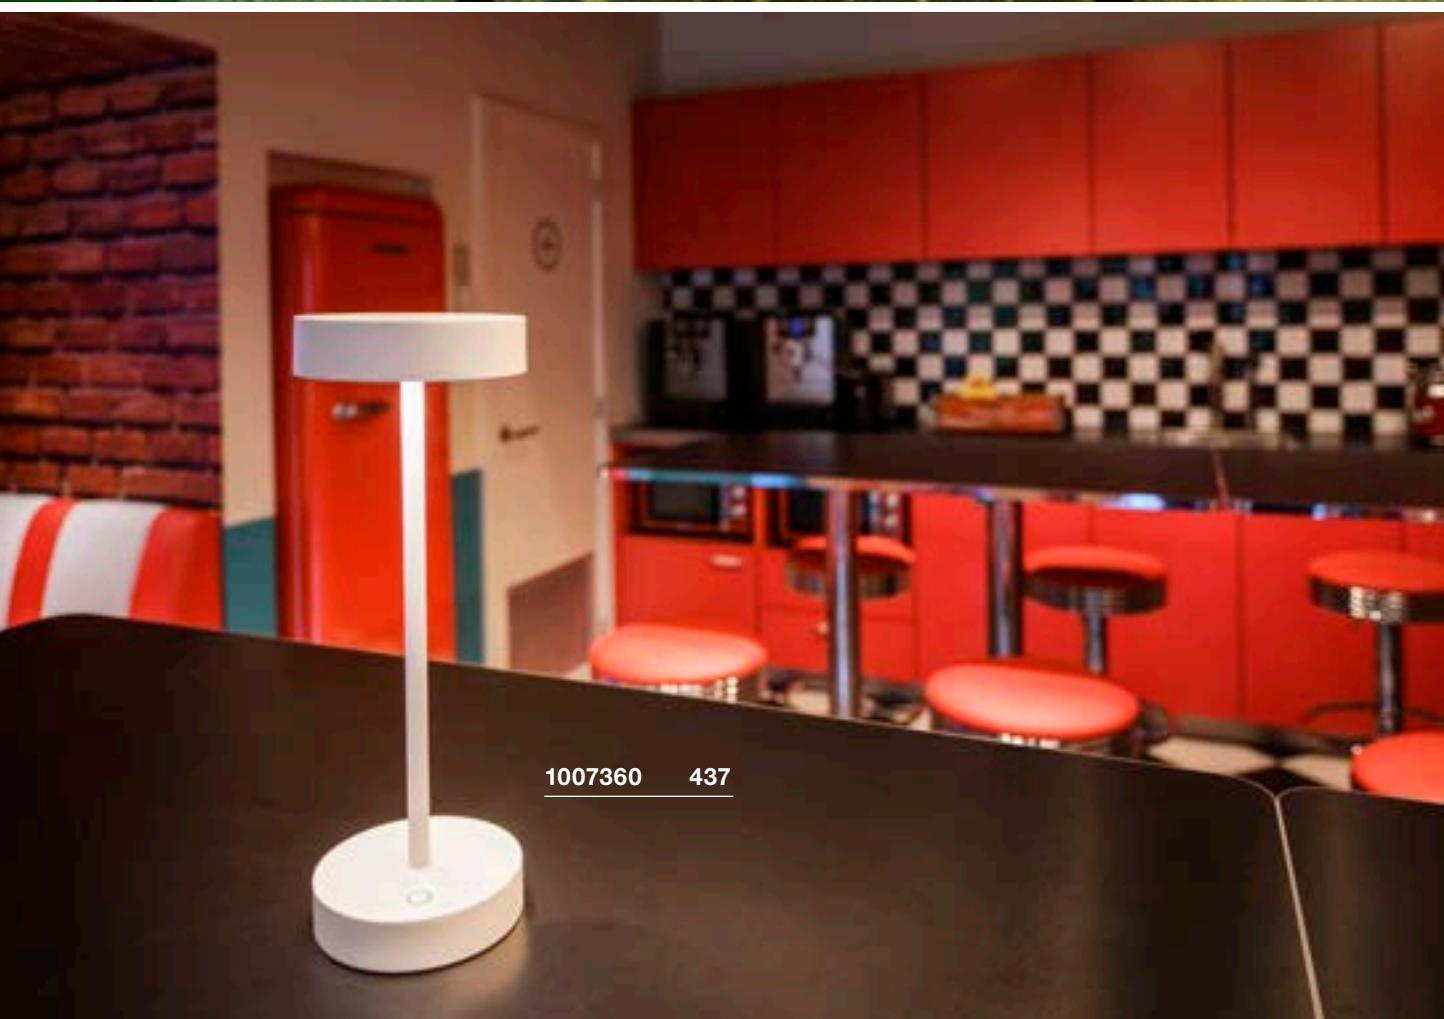




1007360 437



VINOLINA ONE TL, Battery




VINOLINA TL, Battery



5V battery operation
Total wattage: 2.5W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A



5V battery operation
Total wattage: 2.2W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A



Down



125lm | 2700K



Down 130lm | 2700K | 130lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007359
<input type="radio"/> white	1007357
<input type="radio"/> rust	1007358



Options	Prod. no.
<input checked="" type="radio"/> black	1007362
<input type="radio"/> white	1007360
<input type="radio"/> rust	1007361



1007692 439



VINOLINA TWO TL, Battery



5V battery operation
Total wattage: 2W
Material: aluminium

- Touch dimmable
- Running time 10h
- Charging time 5h
- Charging station for one luminaire included



CRI
80

Down	190lm	2200K 2700K 3000K
------	-------	-------------------------

Options	Prod. no.
● black	1007693
○ white	1007692
■ sand	1007697
■ rust	1007695
■ red	1007694
■ lime green	1007696



1007380 441





TAHA

Light set, battery-powered



100-240V ~50/60Hz | 5V battery operation
 Total wattage: 5W
 Max. U-out driver: 5V DC
 Material: aluminium/plastic

- Charging cable included



CRI
80

Down

200lm | 2700K

Options	Prod. no.
● black	1007380





1007366 443



1007622 443



TINY SUN TL



220-240V ~50/60Hz
Material: steel

- Euro plug



Base: 1xG69 Max. diameter: 3 cm L: 6 cm



Options	Prod. no.
copper	1007364
bronze	1007363



LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: 1005286

LITTLE SUN TL



220-240V ~50/60Hz
Material: steel

- Euro plug



Base: 1xG69 Max. diameter: 3 cm L: 6 cm



Options	Prod. no.
copper	1007366
bronze	1007365



LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: 1005286

VARYT TL, E14



220-240V ~50/60Hz
Material: aluminium/steel

- Euro plug



Base: 1xE14 Max. diameter: 3.8 cm L: 11 cm

Options	Prod. no.
black	1007620
white	1007622
brass	1007623
chrome	1007621




C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



WORKLIGHT PRO FL, single



200-240V ~50/60Hz | 48V

Total wattage: 100W

Material: aluminium/steel



- Safety plug
- Touch dimmable



Up 10700lm | 4000K
Down 2300lm

Options	Prod. no.
<input checked="" type="radio"/> black	1007462 ●
<input type="radio"/> white	1007463 ●
<input type="radio"/> grey	1007464 ●

WORKLIGHT PRO FL, double



200-240V ~50/60Hz | 48V

Total wattage: 150W



Material: aluminium/steel

- Safety plug
- Touch dimmable





Up 15600lm | 4000K
Down 4400lm

Options	Prod. no.
<input checked="" type="radio"/> black	1007465 ●
<input type="radio"/> white	1007466 ●
<input type="radio"/> grey	1007467 ●

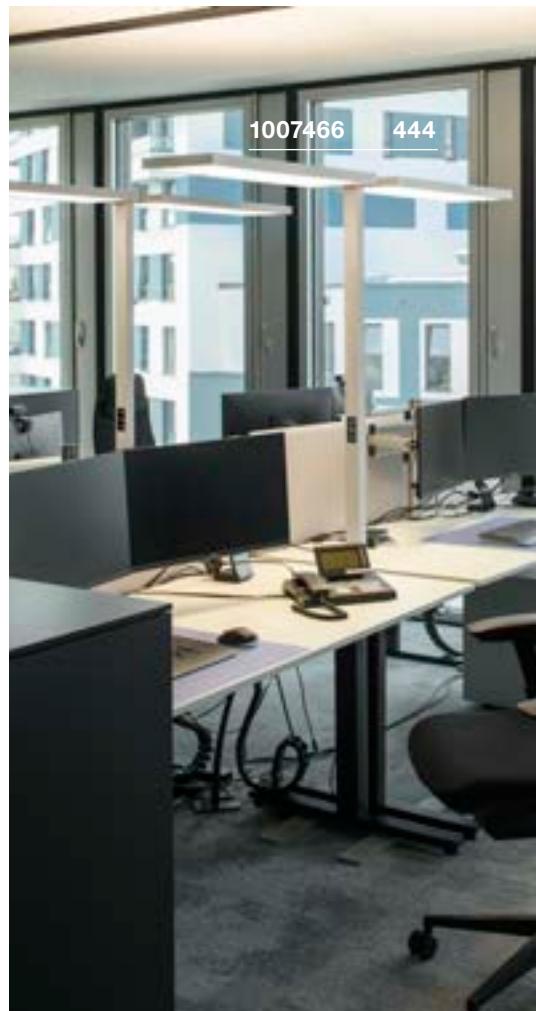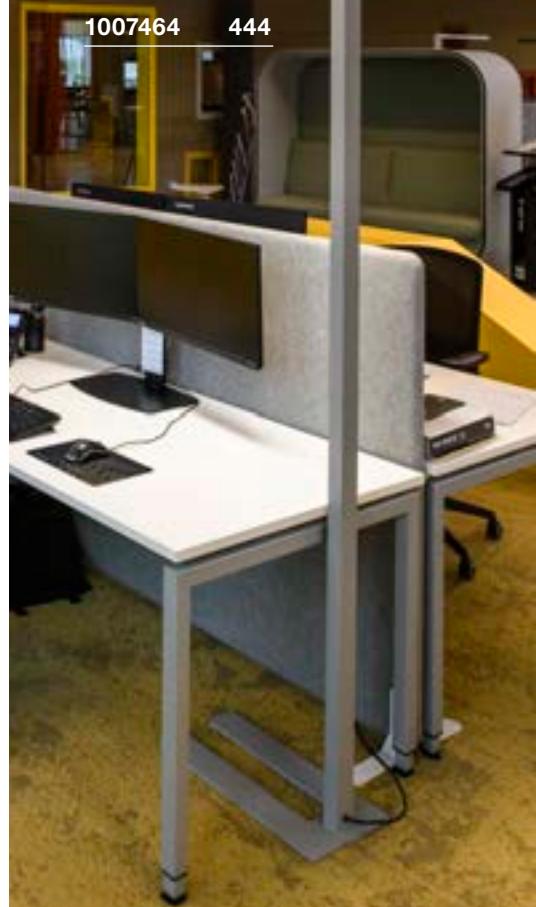




1006344 445

WORKLIGHT
TLWORKLIGHT
FL

1005391 445

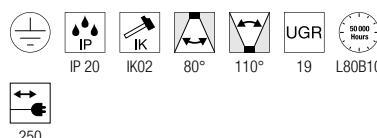


200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Clamping range of 6-40 mm
- Safety plug
- Touch dimmable



Up 3800lm | 4000K
Down 3800lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1005392
<input type="radio"/> white	1005394
<input type="radio"/> silver	1006344 ●

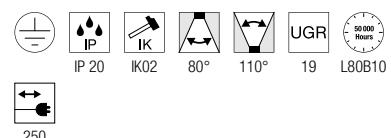

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Safety plug
- Touch dimmable



Up 3800lm | 4000K
Down 3800lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1005390
<input type="radio"/> white	1005391
<input type="radio"/> silver	1006343 ●


132660 + 1000580 296 + 449

155790 + 155592 447 + 449





155780 + 155592 447 + 449

155780 + 1004773 447 + 448

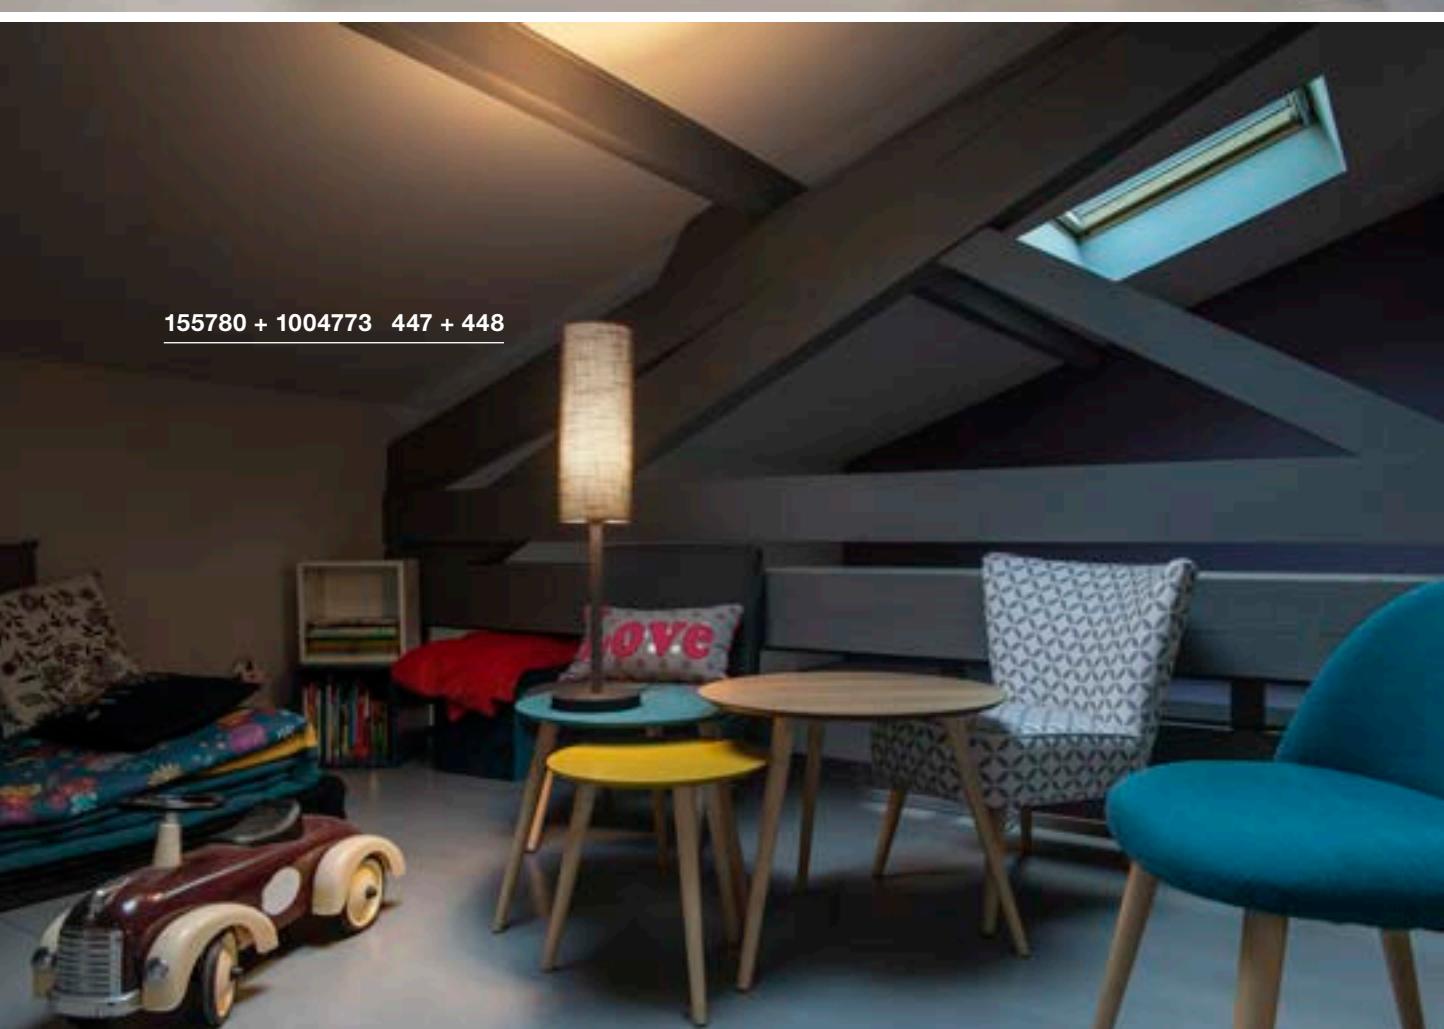



FENDA
TL, E27



220-240V ~50/60Hz
Material: steel

- Euro plug and switch



Base: 1xE27

Options	Prod. no.
● black	155780




A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



FENDA
FL, E27



220-240V ~50/60Hz
Material: steel/plastic

- Euro plug and switch



Base: 1xE27

Options	Prod. no.
● black	155790





LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302



FENDA
TL, E27



220-240V ~50/60Hz
Material: aluminium/plastic

- Euro plug and switch



Base: 1xE27

Options	Prod. no.
● black	155540



LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no.: 1005265



FENDA
FL, E27





FENDA BOW BASIS
FL, E27




FENDA
15 cm, Round



H: 40 cm
Diameter: 15 cm
Material: textile/steel



Options	Prod. no.
● black/copper	156152
○ white	156141
● grey	1004773
● beige	156143




220-240V ~50/60Hz
Material: aluminium

- Switch on light body
- Euro plug



Base: 1xE27

Options	Prod. no.
● black	155490



220-240V ~50/60Hz
Material: steel

- max. shade weight 900g
- Euro plug and switch



Base: 1xE27 max. L: 17.5 cm

Options	Prod. no.
● black	1003029
● chrome	1000763




LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no.: 1005302



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303

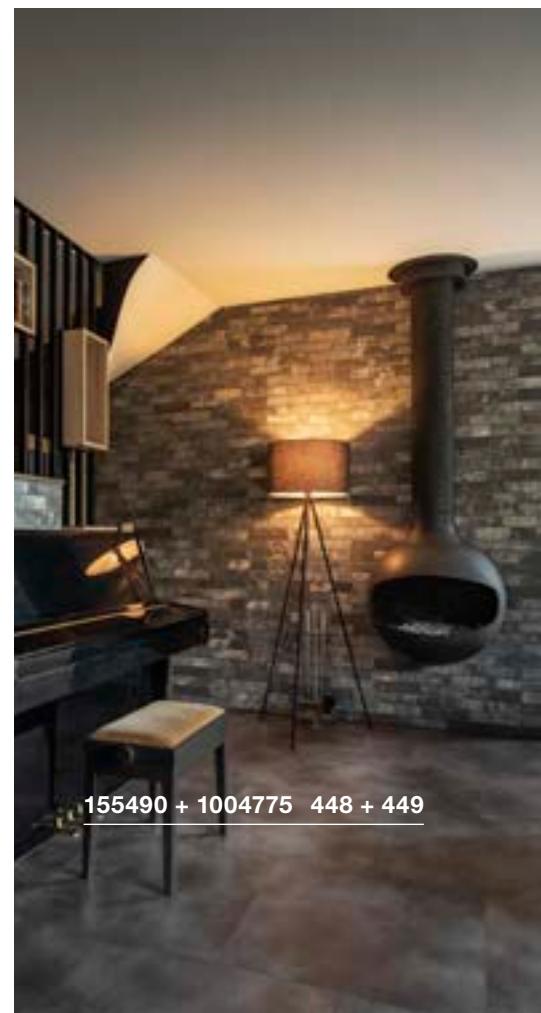

155490 + 1004775 448 + 449



FENDA
30 cm, Round



H: 20 cm
Diameter: 30 cm
Material: textile/steel

FENDA
Ø 45 cm, Round



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

FENDA
Ø 70 cm, Round



H: 36 cm
Diameter: 70 cm
Material: textile/steel

- Not suitable for Fenda Bow.

Options	Prod. no.
<input checked="" type="radio"/> black/copper	155592
<input type="radio"/> white	155582
<input checked="" type="radio"/> grey	1004774
<input type="radio"/> beige	155583

Options	Prod. no.
<input checked="" type="radio"/> black/copper	156122
<input type="radio"/> white	156111
<input checked="" type="radio"/> grey	1004775
<input type="radio"/> beige	156113

Options	Prod. no.
<input checked="" type="radio"/> black/copper	1000580
<input type="radio"/> white	1000579

1003032 448

HOME



MIX & MATCH FENDA

FENDA Ø15



Black	156152
White	156141
Beige	156143
Grey	1004773

FENDA Ø30

Black	155592
White	155582
Beige	155583
Grey	1004774

FENDA Ø45

Black	156122
White	156111
Beige	156113
Grey	1004775

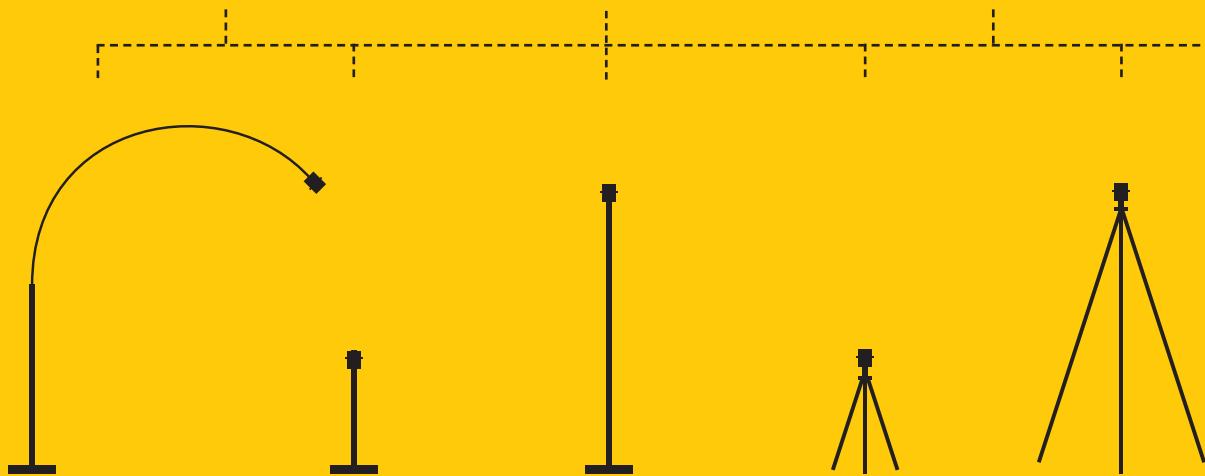

FENDA BOW

Black	1003029
Chrome	1000763

FENDA TL

Black	155780
-------	--------

FENDA FL

Black	155790
-------	--------

FENDA TL

Black	155540
-------	--------

FENDA FL

Black	155490
-------	--------

Combine the SLV Mix & Match products to suit your taste. Designed to work perfectly together, you can mix and match within the FENDA family or even combine the FENDA and FITU product families. You can recognise SLV Mix & Match products by the following symbol:



**MIX
match**

FENDA Ø70

Black | 1000580
White | 1000579



FENDA Ø12,5

Glass Shade
Brown | 1000773



The FITU CRANE BASE
can also be combined
with the FENDA PD and
FENDA lampshades

FENDA PD

Black | 132660
White | 132661
Chrome | 132662

FENDA CL

Black | 155550
White | 155551

FITU CRANE BASE



Black | 1004682



FITU PD

Black | 132690
White | 132691

KARPO
TL

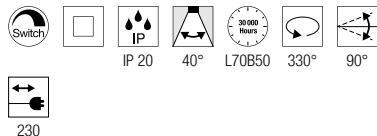

200-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium



- Switch on light body
- Plug-in power supply



Down 360lm | 3000K
430lm

Options	Prod. no.
<input checked="" type="radio"/> black 360lm	1001461
<input type="radio"/> white 430 lm	1001460

KARPO
FL

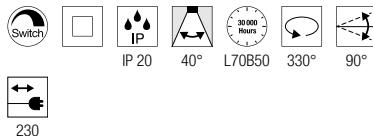

200-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium




- Switch on light body
- Plug-in power supply



Down 360lm | 3000K
430lm


Options	Prod. no.
<input checked="" type="radio"/> black 360lm	1001463
<input type="radio"/> white 430 lm	1001462

1001463 452

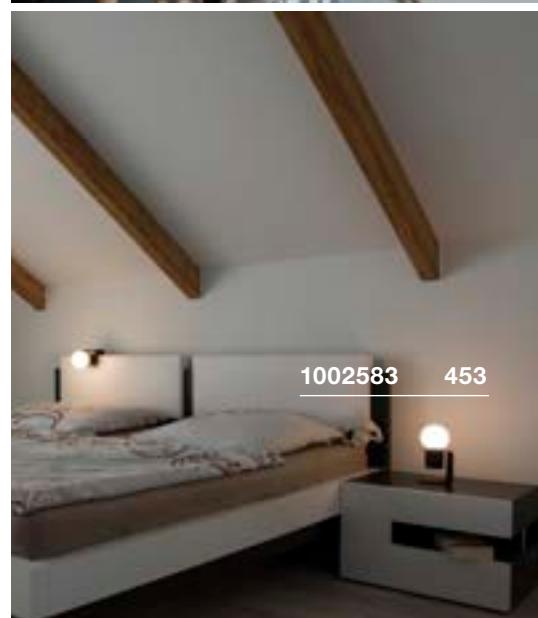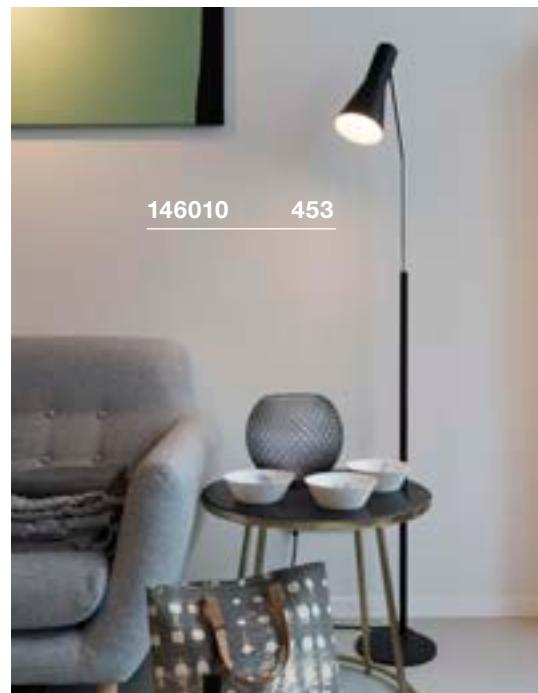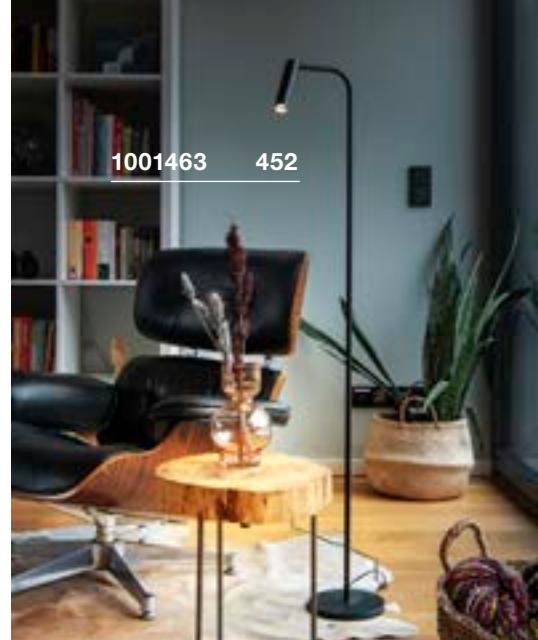



PHELIA
FL, E27



220-240V ~50/60Hz
Material: aluminium/steel

- Switch on light body
- Safety plug and switch



Base: 1xE27 Max. diameter: 5.3 cm L: 18 cm


Options	Prod. no.
● black	146010



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303

TONILA
TL




5V battery operation
Total wattage: 1.6W
Material: aluminium/plastic

- Battery 3.6V 2000mAh included
- Power adapter excluding USB charger 5V DC/1.2A required. For MINI-USB charging cable.
- Can be dimmed to 3 different levels using the switch.



Down 90lm | 2700K

MAGANDA
TL



100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

- 3 colour temperature options via button
- IP44 safety plug



45lm | 2700K 48lm | 3000K 51lm | 4000K

Options	Prod. no.
● black	1002583

Options	Prod. no.
● chrome/frosted	1004970

1006672 469

1006623 475

1006834 471





1006623 + 1006617 475 + 473






NEW

48V TRACK

DALI mounting track

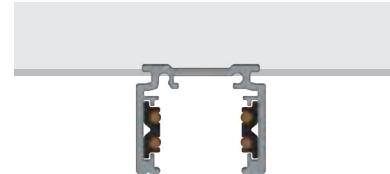

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	5kg	5kg	10kg	10kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 2.62 x 2.26	100 x 2.62 x 2.26	200 x 2.62 x 2.26	200 x 2.62 x 2.26
Prod. no.	1006541 ●	1006542 ●	1006543 ●	1006544 ●


	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	15kg	15kg	20kg	20kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 2.62 x 2.26	300 x 2.62 x 2.26	400 x 2.62 x 2.26	400 x 2.62 x 2.26
Prod. no.	1006545 ●	1006546 ●	1006547 ●	1006548 ●

NEW

48V TRACK

DALI mounting track

Planning assistance and accessories at a glance

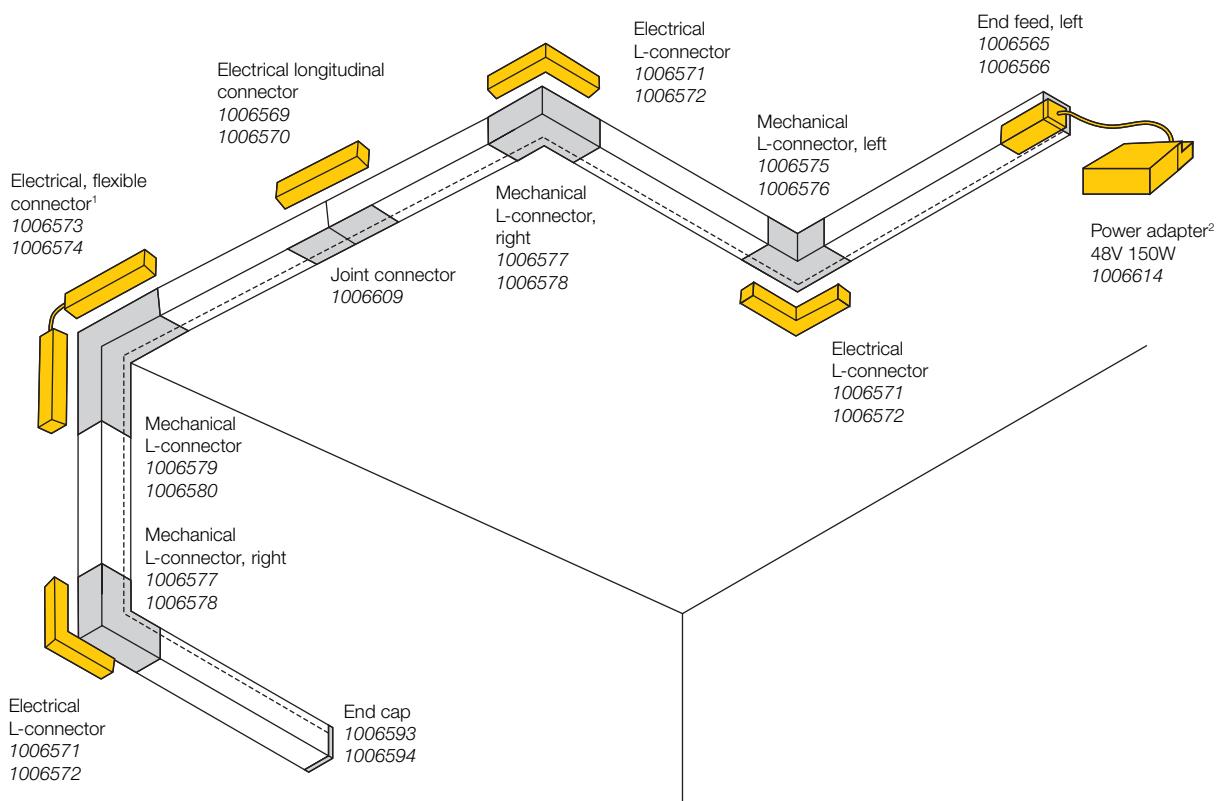

¹ Please note that electrical and mechanical connectors must always be installed together.

² Power adapter must be placed externally.

**End feed, right**

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006567**
1006568

Power adapter 48V | 60W

Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm



white

Prod. no. **1006613**

End feed, left

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006565**
1006566

Power adapter 150W | 48V

Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm



black

Prod. no. **1006614**

L-connector mechanical, f. mounting track standard, right (f. ceiling installation)

aluminium
L: 7.1 cm | W: 7.1 cm | H: 2.19 cm



black
 white

Prod. no. **1006577**
1006578

**Cover, 20mm f. standard track assembly, 2 m**

Aluminium/polycarbonate (PC)
L: 200 cm | W: 2 cm | H: 0.6 cm

black
 white

Prod. no. **1006611**
1006612

L-connector mechanical, f. mounting track standard, left (f. ceiling installation)

aluminium
L: 7.1 cm | W: 7.1 cm | H: 2.19 cm



black
 white

Prod. no. **1006575**
1006576

**End cap f. mounting track standard**

Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 2.2 cm

black
 white

Prod. no. **1006593**
1006594

L-connector mechanical, f. mounting track, standard, stereo, (wall/ceiling)

aluminium
L: 8.4 cm | W: 2.62 cm | H: 8.4 cm



black
 white

Prod. no. **1006579**
1006580

**Track reinforcement plate f. mounting track**

Steel
L: 5 cm | W: 1.32 cm | H: 0.25 cm

grey

Prod. no. **1006609**

Electric L-connector, DALI

16A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm



black
 white

Prod. no. **1006571**
1006572

**Track reinforcement plate with mounting set, 3m wire rope**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006603**
1006604

Electric longitudinal connector, DALI

16A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006569**
1006570

**Track reinforcement plate with mounting set, 1m rod**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006601**
1006602

Flexible connector, electrical, DALI

16A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006573**
1006574

**Pendant suspension, 1m rod**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006605**
1006606

Transformer housing incl. end feed right, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007137**
1007138

**Pendant suspension, 3m wire rope**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006607**
1006608

Transformer housing incl. end feed left, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007083**
1007084

**Mounting bracket**

aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

black
 white

Prod. no. **1006599**
1006600

1006726 + 1006623 + 1006617 469 + 475 + 473






NEW

48V TRACK

DALI deep mounting track

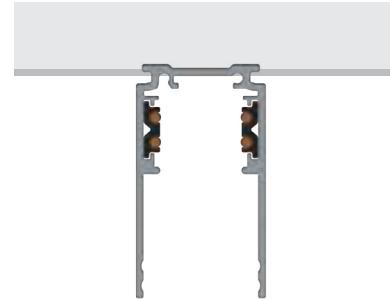

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	5kg	5kg	10kg	10kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 2.62 x 4.72	100 x 2.62 x 4.72	200 x 2.62 x 4.72	200 x 2.62 x 4.72
Prod. no.	1006549 ●	1006550 ●	1006551 ●	1006552 ●


	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	15kg	15kg	20kg	20kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 2.62 x 4.72	300 x 2.62 x 4.72	400 x 2.62 x 4.72	400 x 2.62 x 4.72
Prod. no.	1006553 ●	1006554 ●	1006555 ●	1006556 ●

NEW

48V TRACK

DALI deep mounting track

Planning assistance and accessories at a glance

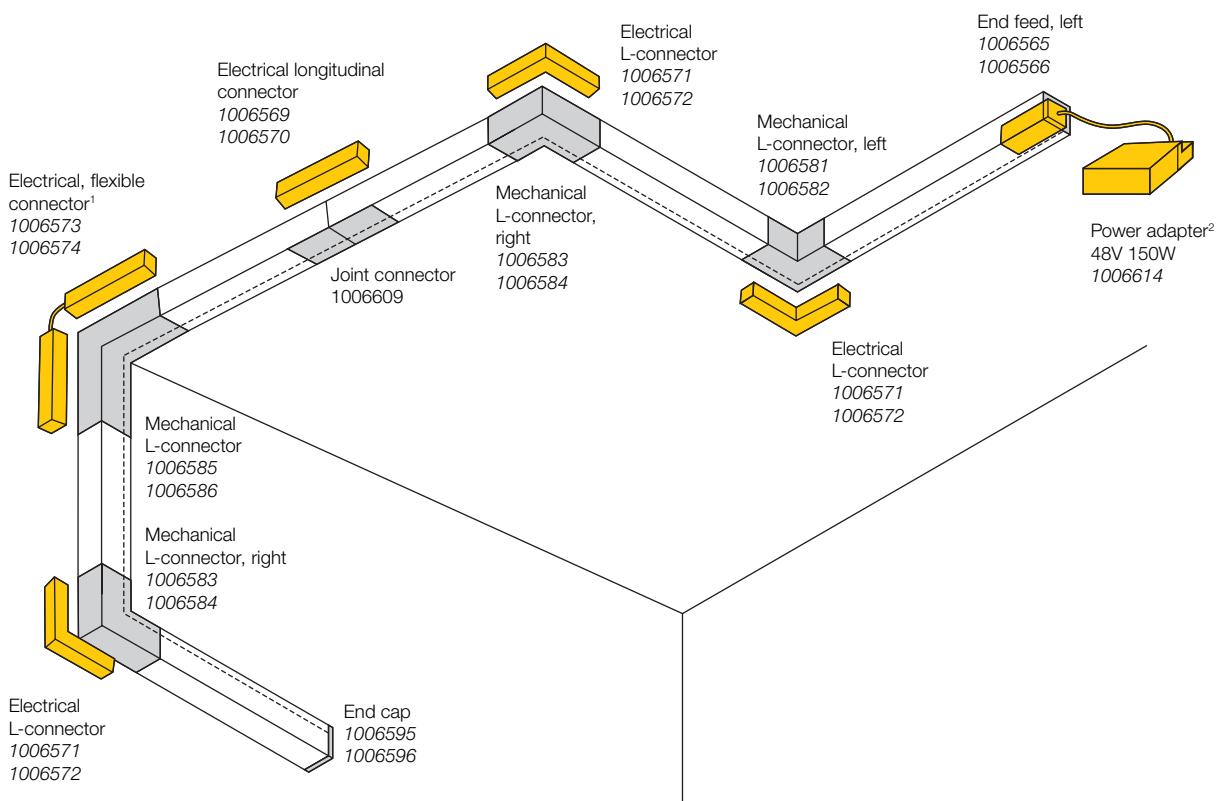

¹ Please note that electrical and mechanical connectors must always be installed together.

² Power adapter must be placed externally.

**End feed, right**

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006567**
1006568

Power adapter 48V | 60W

Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm



white

Prod. no. **1006613**

End feed, left

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006565**
1006566

Power adapter 150W | 48V

Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm



black

Prod. no. **1006614**

L-connector mechanical f. mounting track deep, right (f. ceiling installation)

aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm



black
 white

Prod. no. **1006583**
1006584

**Track cover, 26mm, f. mounting track deep and recessed track, 2 m**

Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

black
 white

Prod. no. **1007188**
1007189

L-connector mechanical f. mounting track deep, left (f. ceiling installation)

aluminium
L: 7.1 cm | W: 7.1 cm | H: 4.7 cm



black
 white

Prod. no. **1006581**
1006582

**End cap f. mounting track deep**

Polycarbonate (PC)
L: 2.6 cm | W: 0.2 cm | H: 4.7 cm

black
 white

Prod. no. **1006595**
1006596

L-connector mechanical, f. mounting track, deep, stereo (wall/ceiling)

aluminium
L: 8.4 cm | W: 8.4 cm | H: 4.7 cm



black
 white

Prod. no. **1006585**
1006586

**Track reinforcement plate f. mounting track**

Steel
L: 5 cm | W: 1.32 cm | H: 0.25 cm

grey

Prod. no. **1006609**

Electric L-connector, DALI

16A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm



black
 white

Prod. no. **1006571**
1006572

**Track reinforcement plate with mounting set, 3m wire rope**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006603**
1006604

Electric longitudinal connector, DALI

16A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006569**
1006570

**Track reinforcement plate with mounting set, 1m rod**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006601**
1006602

Flexible connector, electrical, DALI

16A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006573**
1006574

**Pendant suspension, 1m rod**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006605**
1006606

Transformer housing incl. end feed right, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007137**
1007138

**Pendant suspension, 3m wire rope**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006607**
1006608

Transformer housing incl. end feed left, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007083**
1007084

**Mounting bracket**

aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm

black
 white

Prod. no. **1006599**
1006600

1006783 + 1006672 + 1006635 471 + 471 + 475






NEW

48V TRACK

DALI recessed track

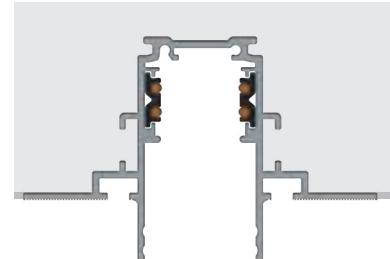

	1 m	1 m	2 m	2 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	5kg	5kg	10kg	10kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 7.4 x 4.7	100 x 7.4 x 4.7	200 x 7.4 x 4.7	200 x 7.4 x 4.7
Prod. no.	1006557 ●	1006558 ●	1006559 ●	1006560 ●


	3 m	3 m	4 m	4 m
Nominal voltage (V)	48V DC	48V DC	48V DC	48V DC
Max. current (A)	16	16	16	16
max. mech. load	15kg	15kg	20kg	20kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 7.4 x 4.7	300 x 7.4 x 4.7	400 x 7.4 x 4.7	400 x 7.4 x 4.7
Prod. no.	1006561 ●	1006562 ●	1006563 ●	1006564 ●

NEW

48V TRACK

DALI recessed track

Planning assistance and accessories at a glance

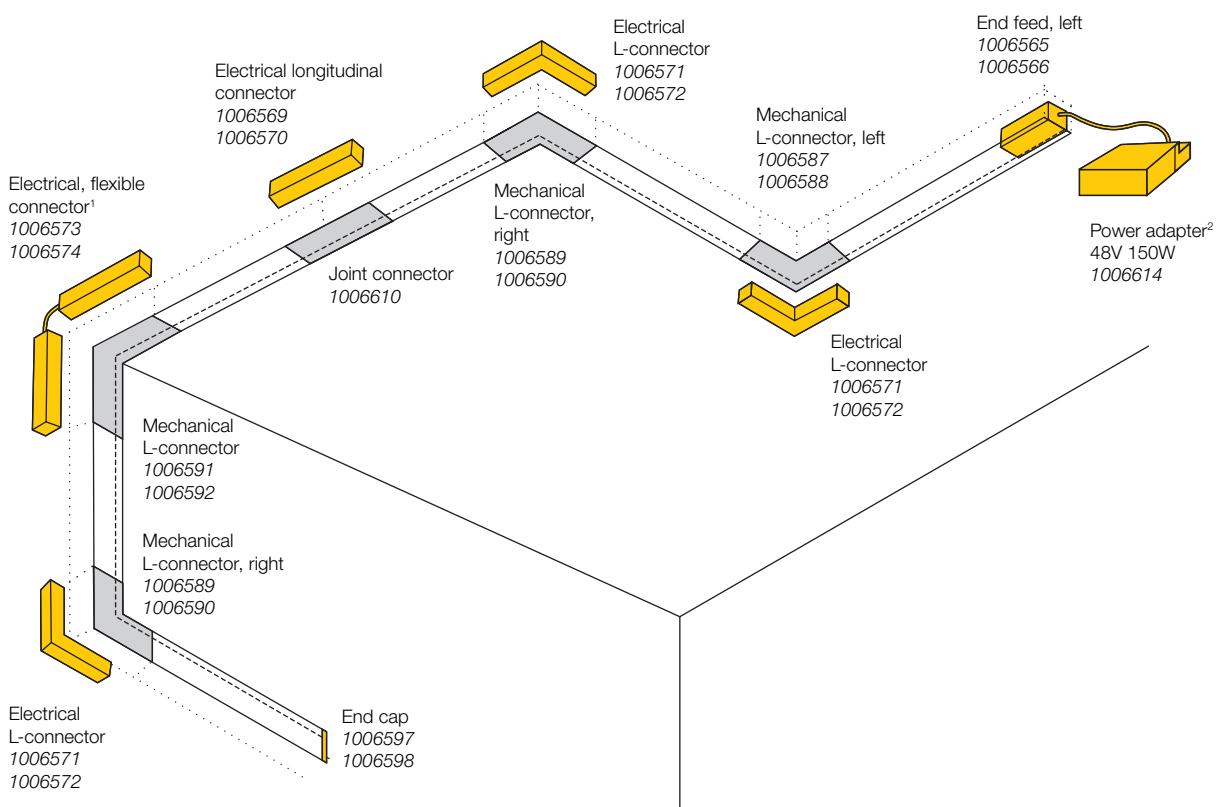

¹ Please note that electrical and mechanical connectors must always be installed together.

² Power adapter must be placed externally.

**End feed, right**

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006567**
1006568

Power adapter 48V | 60W

Polycarbonate (PC)
L: 18 cm | W: 4.5 cm | H: 2.7 cm



white

Prod. no. **1006613**

End feed, left

16A max. | polycarbonate (PC)
L: 9.7 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006565**
1006566

Power adapter 150W | 48V

Metal/polycarbonate (PC)
L: 19.05 cm | W: 8.8 cm | H: 3.55 cm



black

Prod. no. **1006614**

L-connector mechanical f. recessed track deep, right (f. ceiling installation)

aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm



black
 white

Prod. no. **1006589**
1006590

**Track cover, 26mm, 2 m**

Polycarbonate (PC)
L: 200 cm | W: 26 cm | H: 6 cm

black
 white

Prod. no. **1007188**
1007189

L-connector mechanical f. mounting track deep, left (f. ceiling installation)

aluminium
L: 9.5 cm | W: 9.5 cm | H: 4.7 cm



black
 white

Prod. no. **1006587**
1006588

**End cap f. recessed track**

Polycarbonate (PC)
L: 3.4 cm | W: 0.2 cm | H: 4.7 cm

black
 white

Prod. no. **1006597**
1006598

L-connector mechanical, f. recessed track deep, stereo, (wall/ceiling)

aluminium
L: 8.1 cm | W: 7.4 cm | H: 8.1 cm



black
 white

Prod. no. **1006591**
1006592

**Track reinforcement plates set f. recessed track**

Steel
L: 6.3 cm | W: 0.76 cm | H: 0.25 cm

grey

Prod. no. **1006610**

Electric L-connector, DALI

16A max. | polycarbonate (PC)
L: 11.4 cm | W: 11.4 cm | H: 1.9 cm



black
 white

Prod. no. **1006571**
1006572

**Track reinforcement plate with mounting set, 3m wire rope**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006603**
1006604

Electric longitudinal connector, DALI

16A max. | polycarbonate (PC)
L: 14.4 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006569**
1006570

**Track reinforcement plate with mounting set, 1m rod**

Steel
L: 12 cm | W: 2.7 cm

black
 white

Prod. no. **1006601**
1006602

Flexible connector, electrical, DALI

16A max. | polycarbonate (PC)
L: 23 cm | W: 1.6 cm | H: 1.9 cm



black
 white

Prod. no. **1006573**
1006574

**Pendant suspension, 1m rod**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006605**
1006606

Transformer housing incl. end feed right, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007137**
1007138

**Pendant suspension, 3m wire rope**

Steel
W: 2.9 cm

black
 white

Prod. no. **1006607**
1006608

Transformer housing incl. end feed left, DALI

Polycarbonate (PC)
L: 23.3 cm | W: 10.1 cm | H: 4.1 cm



black
 white

Prod. no. **1007083**
1007084

**Mounting bracket**

aluminium
L: 3 cm | W: 2.72 cm | H: 1.05 cm


black
 white

Prod. no. **1006599**
1006600


1006635 + 1006729 475 + 469



NUMINOS® XS
48V, DALI




NUMINOS® S
48V, DALI





NUMINOS® SPOT 48V



LED
INSIDE

XS 48V | 200mA
Total wattage: 8.7W
Material: aluminium/polycarbonate (PC)

S 48V | 350mA
Total wattage: 16W
Material: aluminium/polycarbonate (PC)

		20°	640lm	1006651
	2700K	40°	620lm	1006654
		55°	640lm	1006657
	Dali			
	3000K	20°	700lm	1006669
		40°	670lm	1006672
		55°	690lm	1006675
	2700K	20°	670lm	1006652
		40°	650lm	1006655
	Dali			
		55°	670lm	1006658
	3000K	20°	730lm	1006670
		40°	700lm	1006673
		55°	720lm	1006676
	Dali			
	2700K	20°	670lm	1006653
		40°	650lm	1006656
		55°	670lm	1006659
	3000K	20°	730lm	1006671
		40°	700lm	1006674
		55°	720lm	1006677
	Dali			
	2700K	20°	670lm	1006661
		40°	650lm	1006664
		55°	670lm	1006667
	3000K	20°	730lm	1006679
		40°	700lm	1006682
		55°	720lm	1006685
	Dali			
	2700K	20°	640lm	1006660
		40°	620lm	1006663
		55°	640lm	1006666
	3000K	20°	700lm	1006678
		40°	670lm	1006681
		55°	690lm	1006684
	Dali			
	2700K	20°	670lm	1006662
		40°	650lm	1006665
		55°	670lm	1006668
	3000K	20°	730lm	1006680
		40°	700lm	1006683
		55°	720lm	1006686

100lm	1006705
970lm	1006708
960lm	1006711
1060lm	1006723
1030lm	1006726
1030lm	1006729
1020lm	1006706
1050lm	1006709
1030lm	1006712
1120lm	1006724
1120lm	1006727
1120lm	1006730
960lm	1006707
1000lm	1006710
980lm	1006713
1050lm	1006725
1050lm	1006728
1050lm	1006731
1020lm	1006715
1050lm	1006718
1030lm	1006721
1120lm	1006733
1120lm	1006736
1120lm	1006739
1000lm	1006714
970lm	1006717
960lm	1006720
1060lm	1006732
1030lm	1006735
1030lm	1006738
960lm	1006716
1000lm	1006719
980lm	1006722
1050lm	1006734
1050lm	1006737
1050lm	1006740



Product	Prod. no.
Elliptical diffuser XS	
<input type="radio"/> transparent	1005612
Prismatic diffuser XS	
<input type="radio"/> transparent	1005613
Frosted diffuser XS	
<input type="radio"/> frosted	1005614
Honeycomb diffuser XS	
<input checked="" type="radio"/> black	1005615




Product	Prod. no.
Elliptical diffuser S	
<input type="radio"/> transparent	1004786
Prismatic diffuser S	
<input type="radio"/> transparent	1004787
Frosted diffuser S	
<input type="radio"/> frosted	1004788
Honeycomb diffuser S	
<input checked="" type="radio"/> black	1004789

These lights are also available as 4000K versions on request (except XS). Please note the different delivery times and minimum order quantities.


1006844 **471**



NUMINOS® XS
48V, DALI




NUMINOS® S
48V, DALI





NUMINOS® PENDANT LIGHT 48V



LED
INSIDE

XS 48V | 200mA
Total wattage: 8.7W
Material: aluminium/polycarbonate (PC)

S 48V | 350mA
Total wattage: 16W
Material: aluminium/polycarbonate (PC)

		20°	460lm	1006759
	2700K	40°	620lm	1006762
		55°	640lm	1006765
	Dali			
	3000K	20°	700lm	1006777
		40°	670lm	1006780
		55°	690lm	1006783
	2700K	20°	670lm	1006760
		40°	650lm	1006763
	Dali			
		55°	670lm	1006766
	3000K	20°	730lm	1006778
		40°	700lm	1006781
		55°	720lm	1006784
	Dali			
	2700K	20°	670lm	1006761
		40°	650lm	1006764
		55°	670lm	1006767
	3000K	20°	730lm	1006779
		40°	700lm	1006782
		55°	720lm	1006785
	Dali			
	2700K	20°	670lm	1006769
		40°	650lm	1006772
		55°	670lm	1006775
	3000K	20°	730lm	1006787
		40°	700lm	1006790
		55°	720lm	1006793
	Dali			
	2700K	20°	620lm	1006771
		40°	640lm	1006768
		55°	640lm	1006774
	3000K	20°	700lm	1006786
		40°	670lm	1006789
		55°	690lm	1006792
	Dali			
	2700K	20°	670lm	1006770
		40°	650lm	1006773
		55°	670lm	1006776
	3000K	20°	730lm	1006788
		40°	700lm	1006791
		55°	720lm	1006794

1000lm	1006813
970lm	1006816
960lm	1006819
1060lm	1006831
1030lm	1006834
1030lm	1006837
1020lm	1006814
1050lm	1006817
1030lm	1006820
1120lm	1006832
1120lm	1006835
1120lm	1006838
960lm	1006815
1000lm	1006818
980lm	1006821
1050lm	1006833
1050lm	1006836
1050lm	1006839
1020lm	1006823
1050lm	1006826
1030lm	1006829
1120lm	1006841
1120lm	1006844
1120lm	1006847
1000lm	1006822
970lm	1006825
960lm	1006828
1060lm	1006840
1030lm	1006843
1030lm	1006846
960lm	1006824
1000lm	1006827
980lm	1006830
1050lm	1006842
1050lm	1006845
1050lm	1006848




Product	Prod. no.
Elliptical diffuser XS	
<input type="radio"/> transparent	1005612
Prismatic diffuser XS	
<input type="radio"/> transparent	1005613
Frosted diffuser XS	
<input type="radio"/> frosted	1005614
Honeycomb diffuser XS	
<input checked="" type="radio"/> black	1005615



Product	Prod. no.
Elliptical diffuser S	
<input type="radio"/> transparent	1004786
Prismatic diffuser S	
<input type="radio"/> transparent	1004787
Frosted diffuser S	
<input type="radio"/> frosted	1004788
Honeycomb diffuser S	
<input checked="" type="radio"/> black	1004789

These lights are also available as 4000K versions on request (except XS). Please note the different delivery times and minimum order quantities.

1006654 + 1006633 + 1006627 469 + 475 + 473

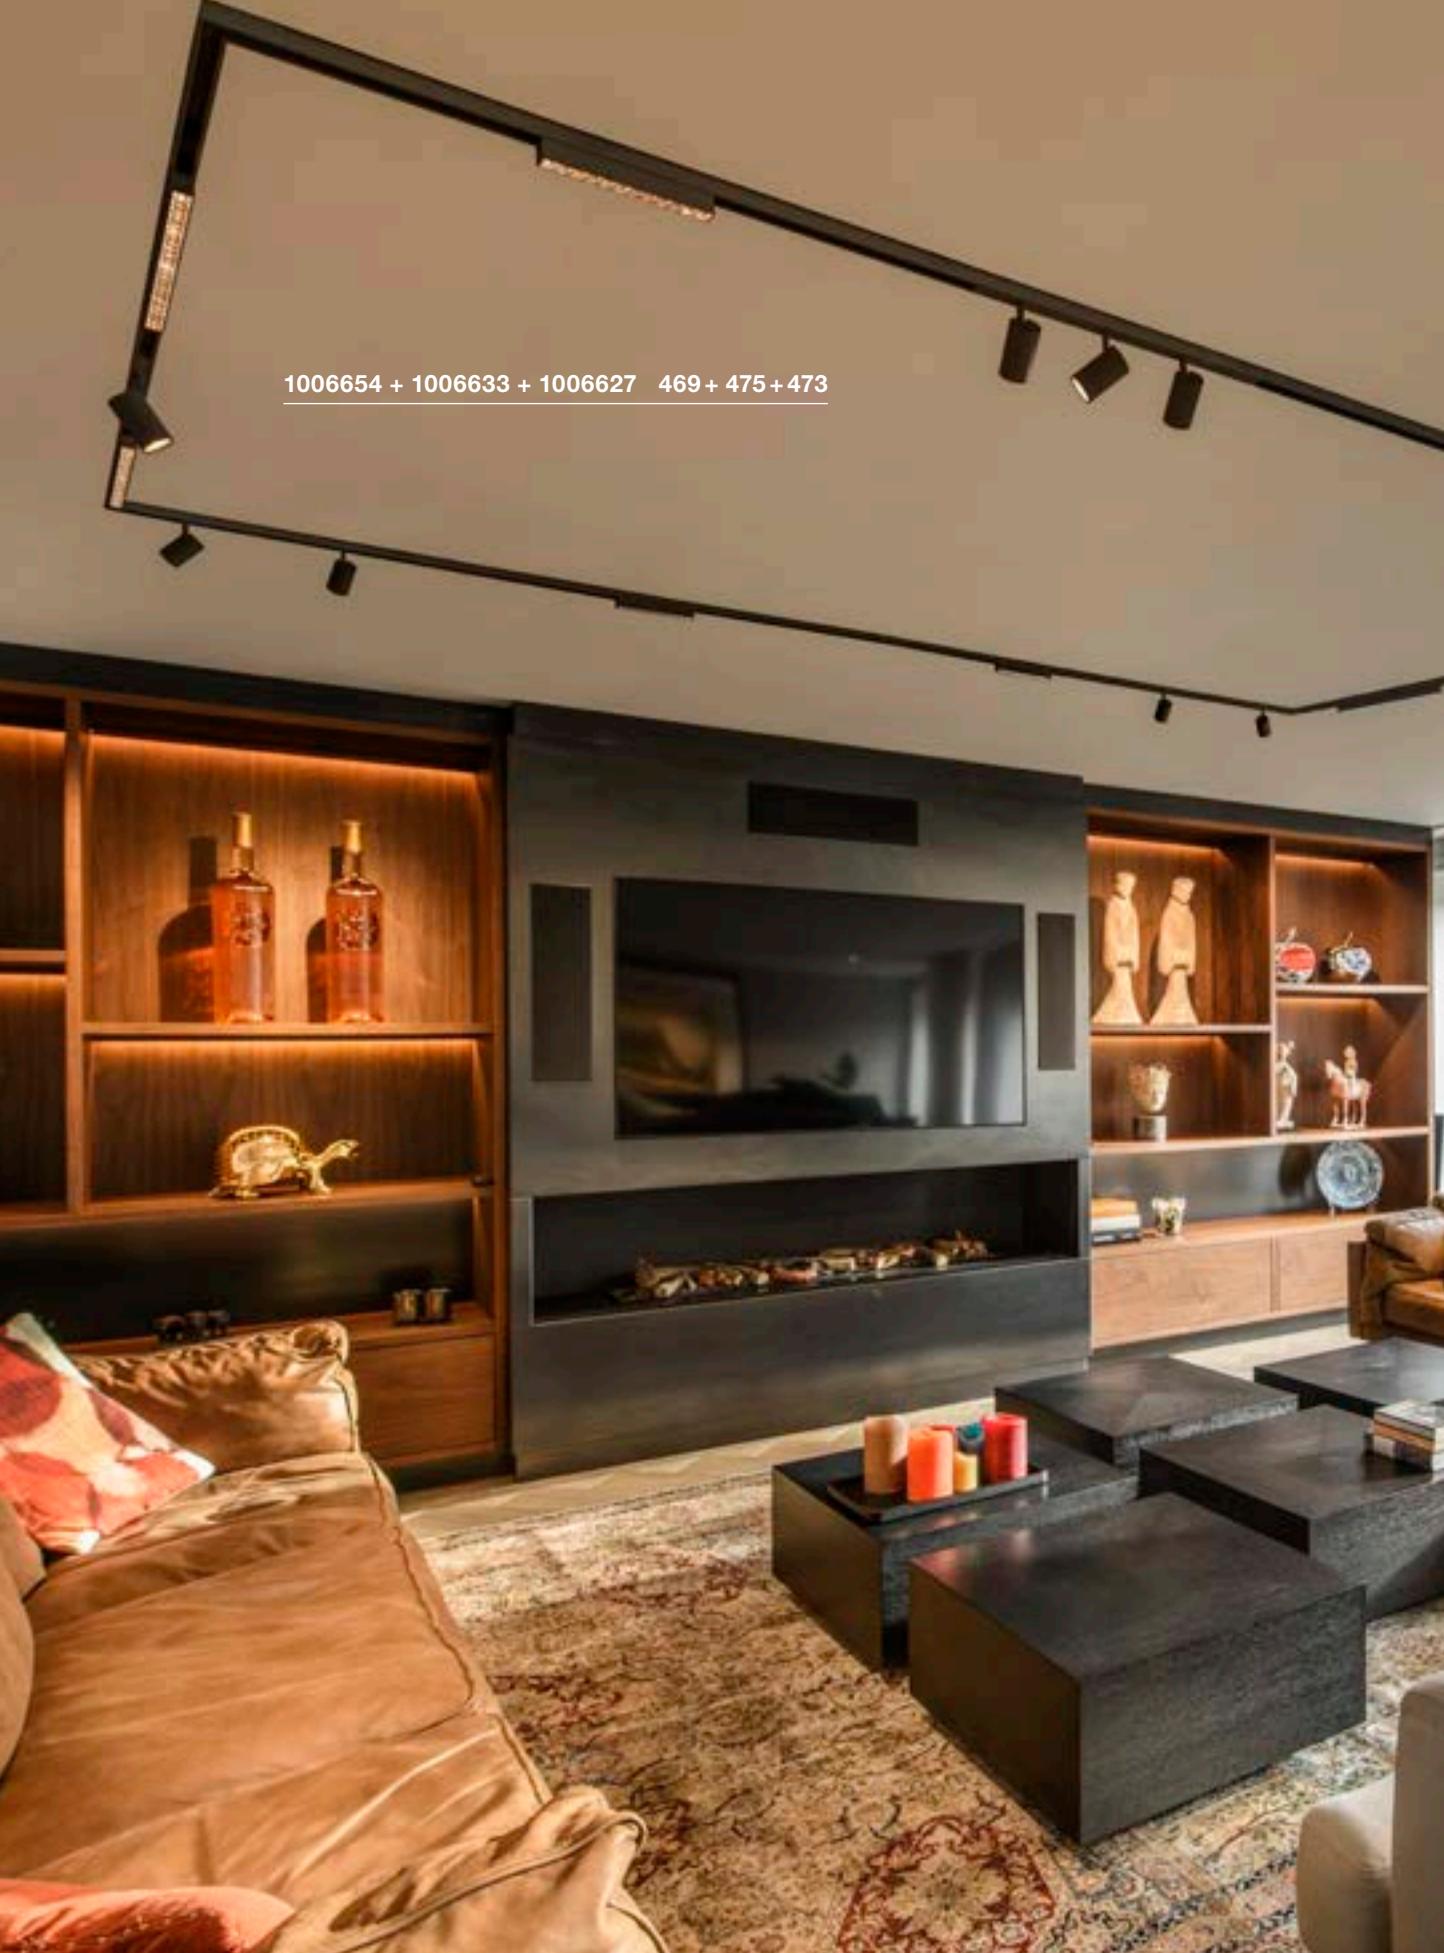





IN-LINE 22
48V, opal, DALI




NEW



NEW



48V | 350mA
Power consumption: 6W
Total wattage: 7.3W
Material: aluminium



48V | 350mA
Power consumption: 6W
Total wattage: 7.3W
Material: aluminium/polycarbonate (PC)



Down 540lm | 2700K
570lm | 3000K



Down 580lm | 2700K
610lm | 3000K

Options	Prod. no.
● black 540lm 2700K	1006615 ●
● black 570lm 3000K	1006617 ●
○ white 540lm 2700K	1006616 ●
○ white 570lm 3000K	1006618 ●

Options	Prod. no.
● black 580lm 2700K	1006627 ●
● black 610lm 3000K	1006629 ●
○ white 580lm 2700K	1006628 ●
○ white 610lm 3000K	1006630 ●



1006633 + 1006654 475+469






IN-LINE 44
48V, opal, DALI



NEW



48V | 350mA
Power consumption: 12W
Total wattage: 14W
Material: aluminium/polycarbonate (PC)



CRI 90




Down 1140lm | 2700K
1180lm | 3000K

Options	Prod. no.
● black 1140lm 2700K	1006621 ●
● black 1180lm 3000K	1006623 ●
○ white 1140lm 2700K	1006622 ●
○ white 1180lm 3000K	1006624 ●

IN-LINE 44
48V, Darklight Reflector, DALI



NEW



48V | 350mA
Power consumption: 12W
Total wattage: 14W
Material: aluminium




CRI 90

Down 1180lm | 2700K
1230lm | 3000K

Options	Prod. no.
● black 1180lm 2700K	1006633 ●
● black 1230lm 3000K	1006635 ●
○ white 1180lm 2700K	1006634 ●
○ white 1230lm 3000K	1006636 ●

1006682 + 1006648 469+477



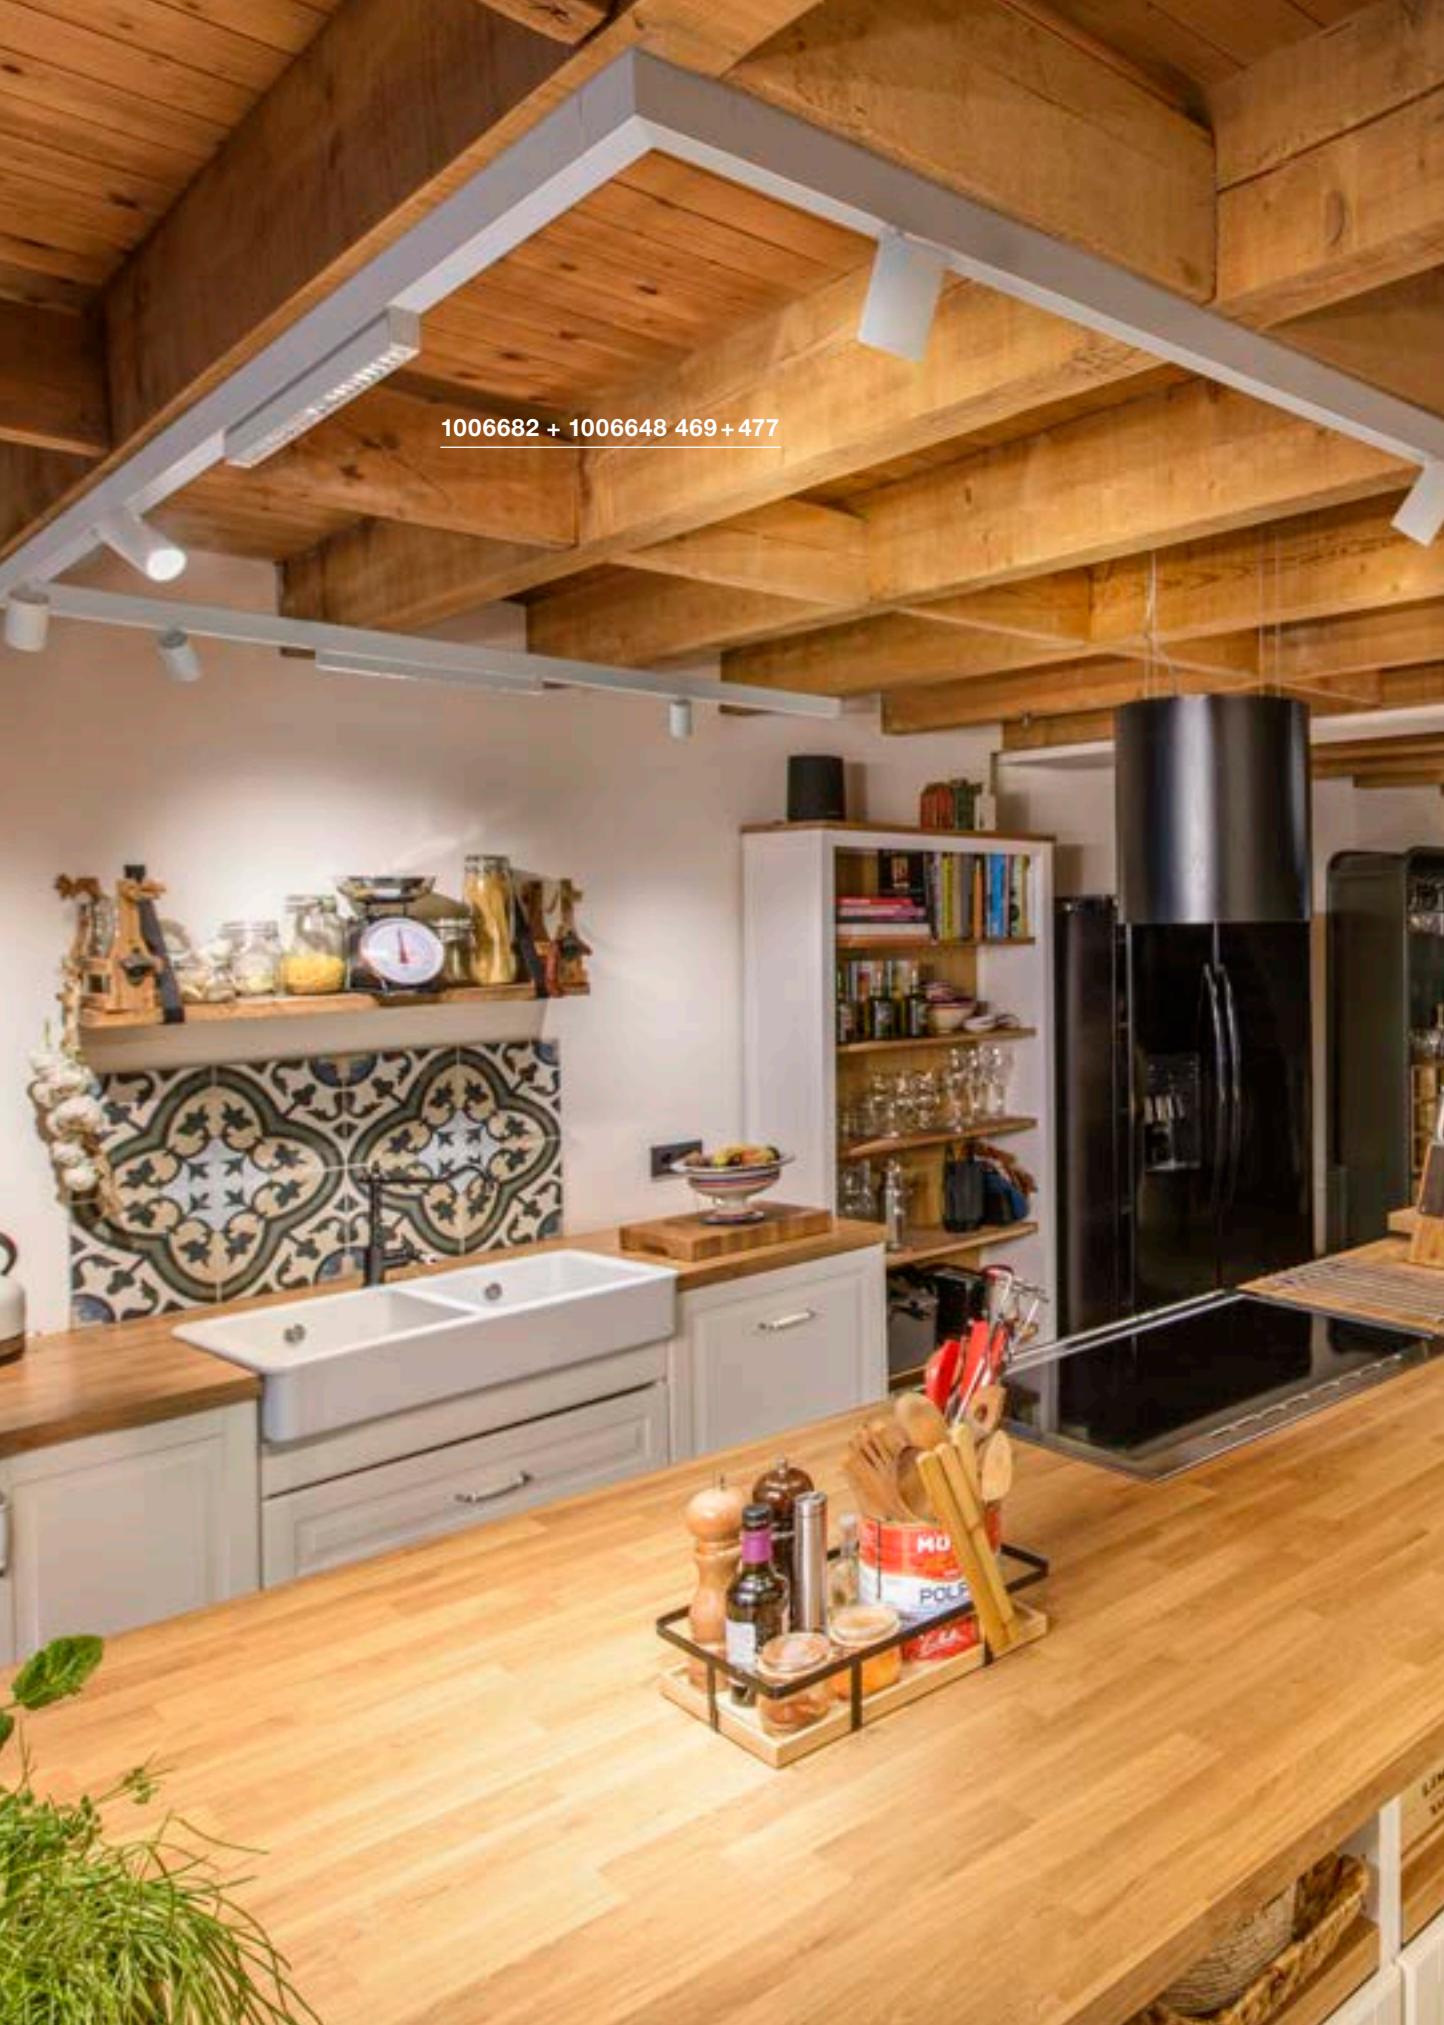




IN-LINE 24
48V, Move, Darklight Reflector, DALI



NEW

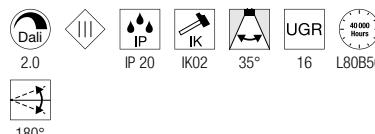




Down 580lm | 2700K
610lm | 3000K

Options	Prod. no.
● black 580lm 2700K	1006639
● black 610lm 3000K	1006641
○ white 580lm 2700K	1006640
○ white 610lm 3000K	1006642

IN-LINE 46
48V, Move, Darklight Reflector, DALI



NEW

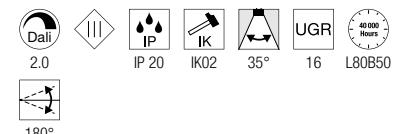


Down 1180lm | 2700K
1230lm | 3000K

Options	Prod. no.
● black 1180lm 2700K	1006645
● black 1230lm 3000K	1006647
○ white 1180lm 2700K	1006646
○ white 1230lm 3000K	1006648

DESIGN YOUR 48V SYSTEM

Select your track version in the appropriate length, desired colour and preferred installation method. Choose the recessed version or one of the two surface-mounted versions. With the NUMINOS® and IN-LINE lights specially designed for the SLV 48V system, they are particularly flexible and perfectly set the scene for their surroundings.

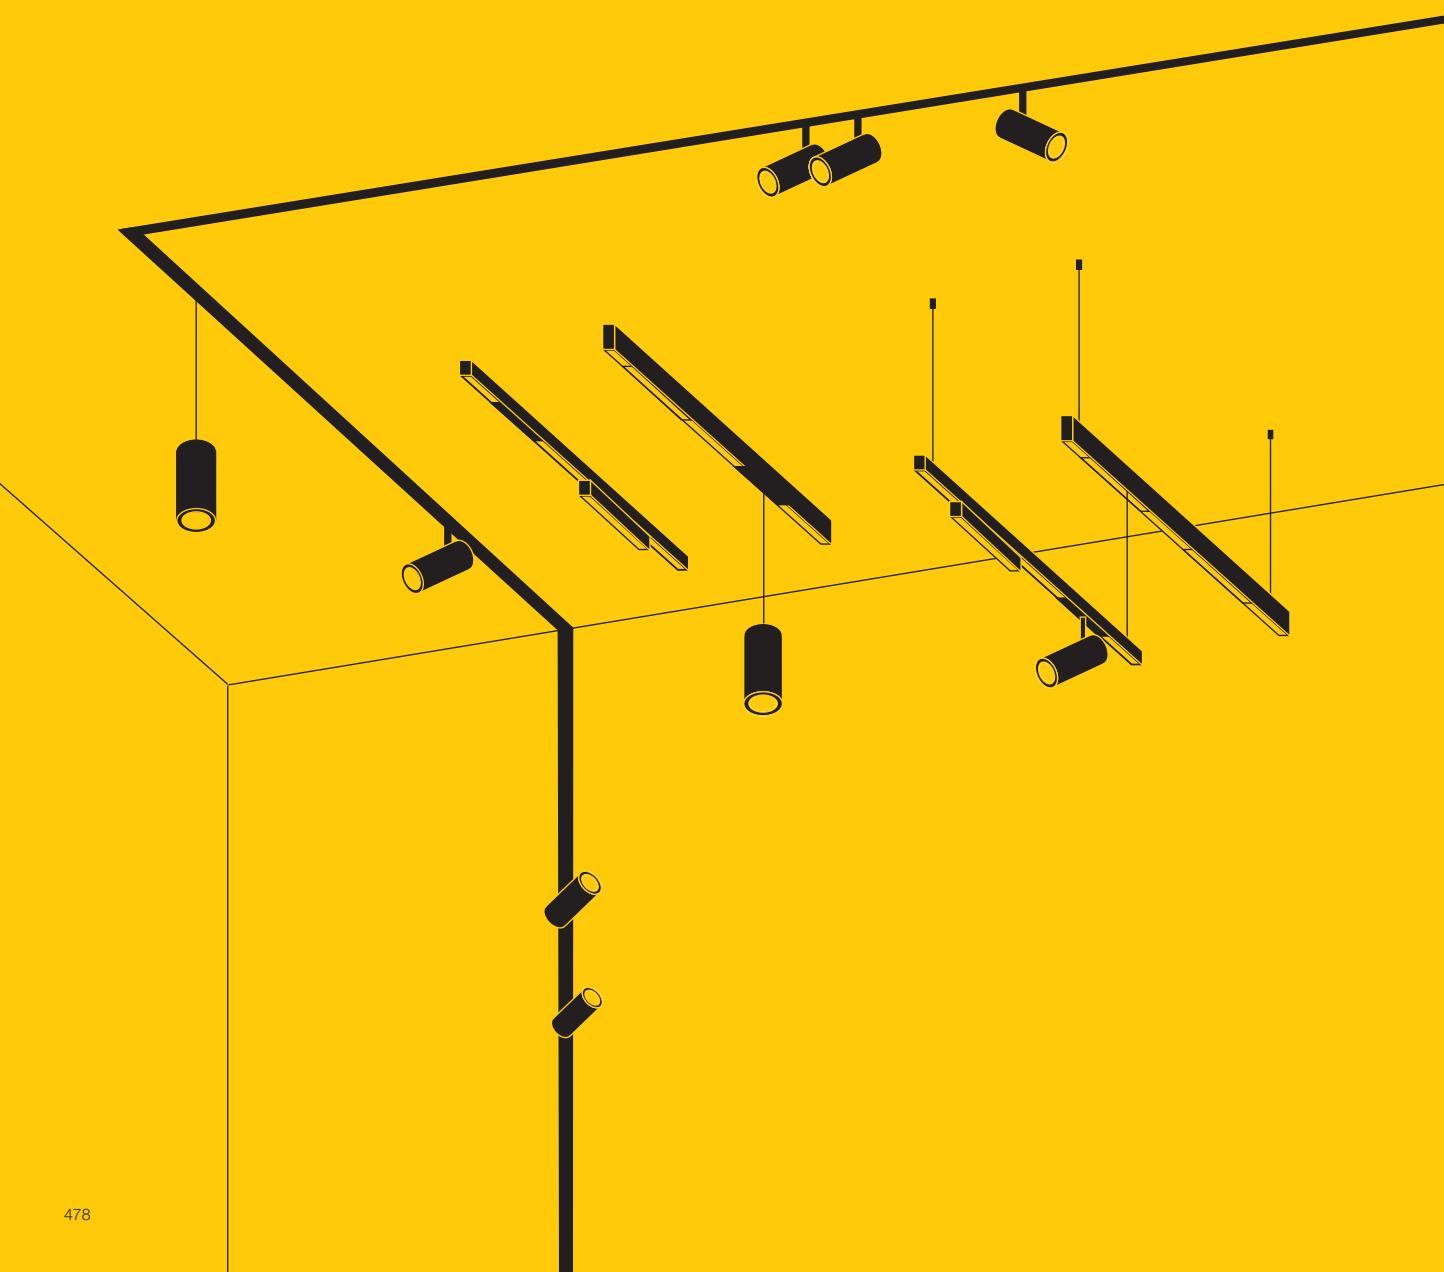


CHOOSE YOUR TRACK


STANDARD MOUNTING
TRACK



DEEP MOUNTING TRACK



RECESSED TRACK



CHOOSE YOUR PREFERRED INSTALLATION

SURFACE-MOUNTED



Ceiling



Wall



Pendant

RECESSED



Ceiling



Wall




CHOOSE YOUR LIGHTS

NUMINOS®
SPOT AND PENDANT LIGHT



IN-LINE, IN-LINE DARKLIGHT REFLECTOR
AND IN-LINE MOVE



CHOOSE YOUR ACCESSORIES

VARIOUS CONNECTORS, COVERS, SUSPENSIONS, POWER ADAPTERS, ETC.

139100

489





SOCKET
ASMARA | 486



SOCKET
TELESKOP | 486



SOCKET
COSMIC | 487



SOCKET
SYROS | 489



SOCKET
SALUNA | 489



LED
DURNO | 489



LED
PLYTTA | 490



LED
NOBLO® SPOT | 491



LED
COMET LED | 491



SOCKET
COMET | 491

TENSEO, Low-voltage cable 4mm², 10m



	10 m	10 m	10 m
Max. voltage (V)	48	48	48
Max. current (A)	25	25	25
Colour	● black	○ white	○ transparent
Material	Copper/plastic	Copper/plastic	Copper/plastic
Diameter (cm)/Length (cm)	0,4 / 1000	0,4 / 1000	0,4 / 1000
Prod. no.	1002602	1002603	1002604

TENSEO, Low-voltage cable 4mm², 20m



	20 m	20 m	20 m
Max. voltage	48	48	48
Max. current (A)	25	25	25
Colour	● black	○ white	○ transparent
Material	Copper/plastic	Copper/plastic	Copper/plastic
Diameter (cm)/Length (cm)	0,4 / 2000	0,4 / 2000	0,4 / 2000
Prod. no.	139030	139031	139024

TENSEO, Low-voltage cable 4mm², 100m

	100 m	100 m	100 m
Max. voltage (V)	48	48	48
Max. current (A)	25	25	25
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input type="radio"/> transparent
Material	Copper/plastic	Copper/plastic	Copper/plastic
Diameter (cm)/Length (cm)	0,4 / 10000	0,4 / 10000	0,4 / 10000
Prod. no.	139040	139041	139004

TENSEO, Low-voltage cable 6mm², 20m

	20 m	20 m	20 m
Max. voltage (V)	48	48	48
Max. current (A)	25	25	25
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input type="radio"/> transparent
Material	Copper/plastic	Copper/plastic	Copper/plastic
Diameter (cm)/Length (cm)	0,6 / 2000	0,6 / 2000	0,6 / 2000
Prod. no.	139050	139051	139026

TENSEO, Low-voltage cable 6mm², 100m



	100 m	100 m	100 m
Max. voltage (V)	48	48	48
Max. current (A)	25	25	25
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input type="radio"/> transparent
Material	Copper/plastic	Copper/plastic	Copper/plastic
Diameter (cm)/Length (cm)	0,6 / 10000	0,6 / 10000	0,6 / 10000
Prod. no.	139060	139061	139006



**12V AC | 50VA conventional**

Steel/brass

H: 11 cm Diameter: 11.1 cm



- black Prod. no. **1002691**
- white Prod. no. **1002692**
- chrome Prod. no. **1002693**

12V AC | 105VA conventional

Steel/brass

H: 11 cm Diameter: 11.1 cm



- white Prod. no. **138981**
- chrome Prod. no. **138982**

12V AC | 210VA conventional

Steel/brass

H: 11 cm Diameter: 13.5 cm



- white Prod. no. **138991**
- chrome Prod. no. **138992**

Cord tightener

25A max. | brass

H: 11 cm Diameter: 1 cm



- black Prod. no. **181530**
- white Prod. no. **181531**
- chrome Prod. no. **181532**

Wall bracket

Steel/brass

L: 3 cm Diameter: 5 cm



- black Prod. no. **186300**
- white Prod. no. **186301**
- chrome Prod. no. **186302**

Diverter 6cm

Steel/brass

H: 6 cm Diameter: 5 cm



- black Prod. no. **186330**
- white Prod. no. **186331**
- chrome Prod. no. **186332**

Redirector

Steel/brass

H: 16 cm Diameter: 5 cm



- black Prod. no. **186340**
- white Prod. no. **186341**
- chrome Prod. no. **186342**

Wall bracket 10cm

Steel/brass

H: 11.5 cm Diameter: 5 cm, With clamping device



- black Prod. no. **186310**
- white Prod. no. **186311**
- chrome Prod. no. **186312**

Ceiling diverter

Steel/brass

H: 16 cm Diameter: 5 cm



- black Prod. no. **186640**
- white Prod. no. **186641**
- chrome Prod. no. **186642**

Feed-in

25A max. | brass

H: 1.8 cm Diameter: 1 cm



- black Prod. no. **186350**
- white Prod. no. **186351**
- chrome Prod. no. **186352**

Insulating connector

25A max. | aluminium / plastic

L: 6.4 cm Diameter: 1 cm



- black Prod. no. **186360**
- white Prod. no. **186361**
- chrome Prod. no. **186362**

Spacer

aluminium

W: 9 cm Diameter: 1.25 cm



- black Prod. no. **1002700**
- white Prod. no. **1002701**
- chrome Prod. no. **1002702**

Electrical spacer

25A max. | brass



H: 9 cm Diameter: 1.25 cm

- black Prod. no. **1002703**
- white Prod. no. **1002704**
- chrome Prod. no. **1002705**

**Suspension kit 2m**




Steel/aluminium

W: 18.6 cm Diameter: 1.25 cm

- black Prod. no. **1002697**
- white Prod. no. **1002698**
- chrome Prod. no. **1002699**

ASMARA
LV, QR-C51

TELESKOP
LV, QR-C51



12V ~50Hz
Material: stainless steel

SOCKET
INSIDE <35 W


Base: 1xGX5.3

Options	Prod. no.
● black	139070
○ white	139071
● chrome	139072



LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no.: **1001574**



12V ~50Hz
Material: steel

- Telescope adjustable from 21-51cm

SOCKET
INSIDE <20 W

Base: 1xGX5.3

Options	Prod. no.
● black	139080
○ white	139081
● chrome	139082





LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no.: **1001574**


COSMIC
 LV, QR-C51

139090 487



12V ~50Hz
 Material: steel/brass

SOCKET
 INSIDE <35
 W

Base: 1xGX5.3

Options	Prod. no.
<input checked="" type="radio"/> black	139090
<input type="radio"/> white	139091
<input type="radio"/> chrome	139092



LED GU5.3 | 5.8W | 36°
 2700K | 450lm | EEK=G
 6kWh/1000h

Prod. no.: 1001574




139102

489




139130

489

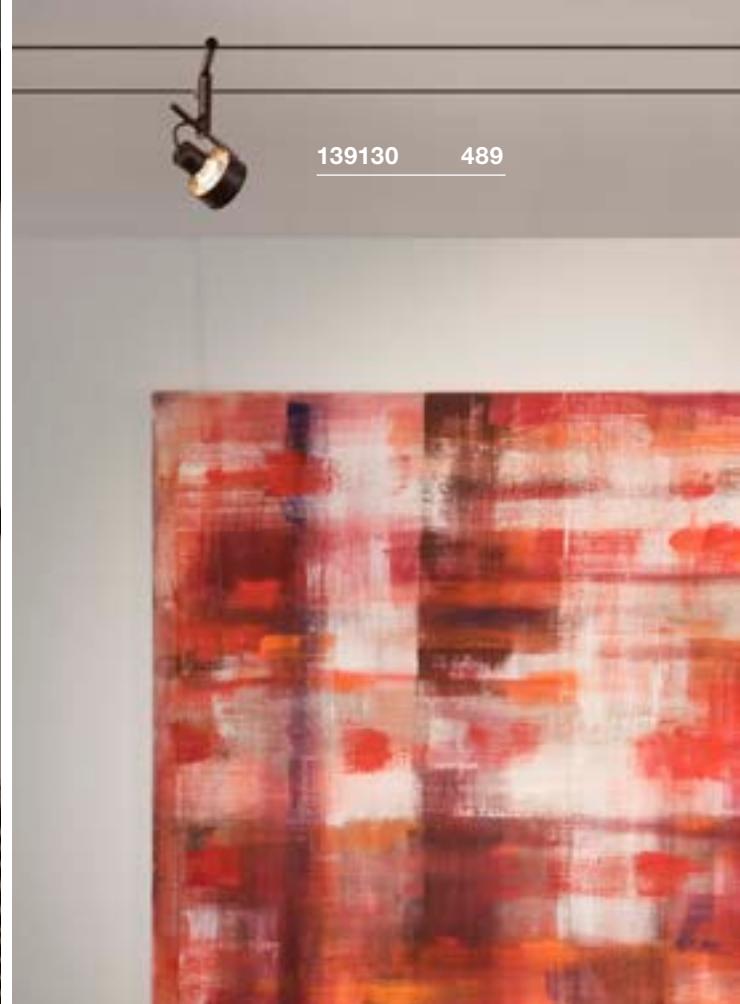





1002862

489

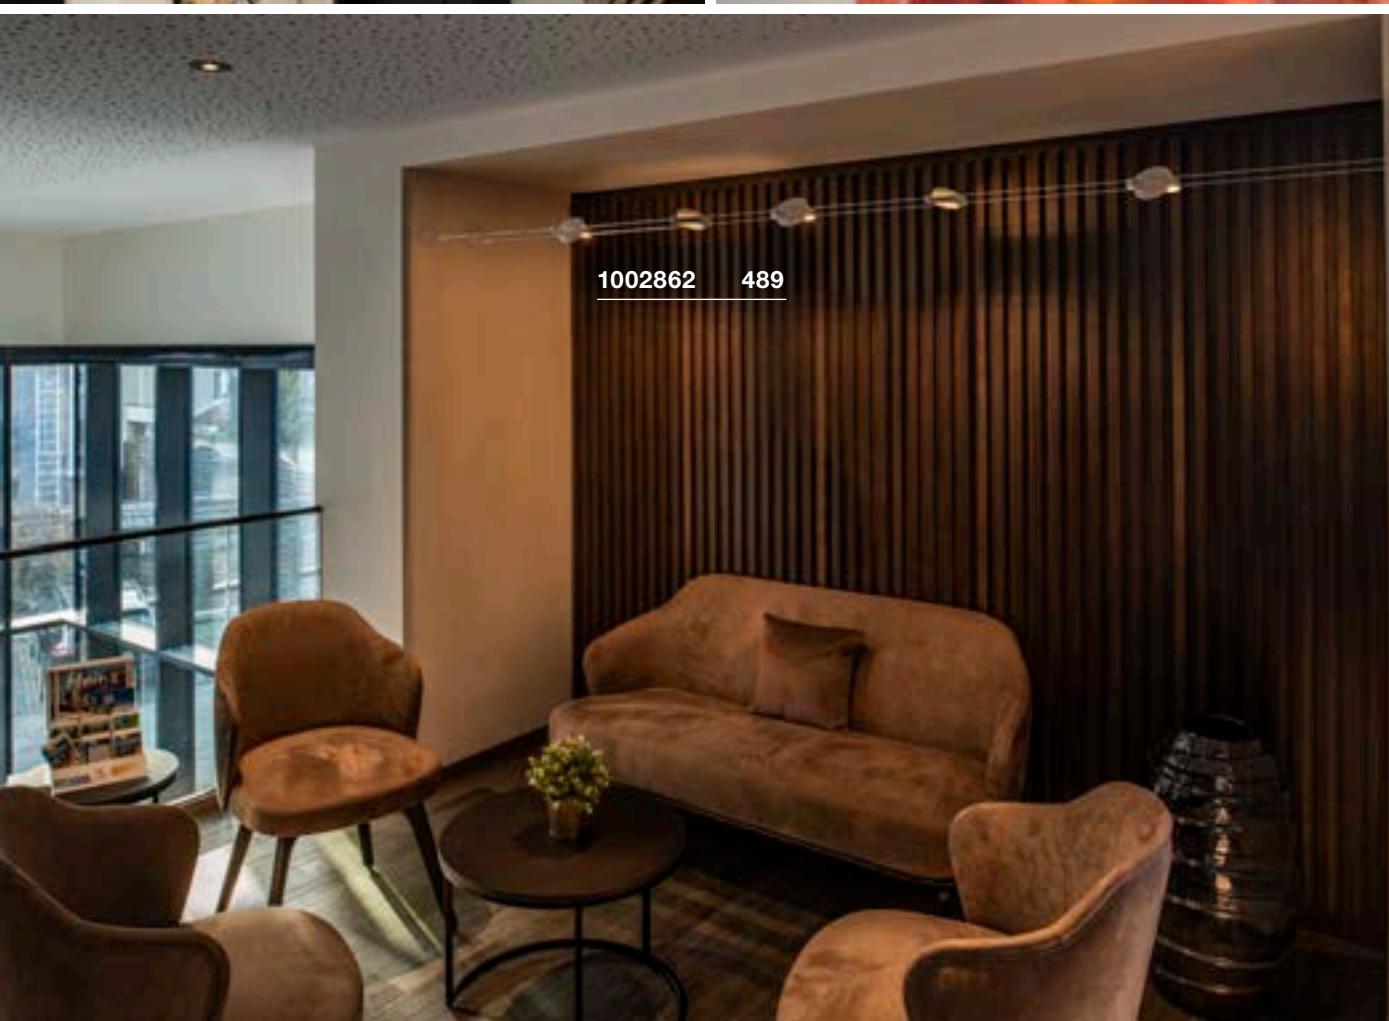



SYROS
LV, QR-C51


SALUNA
LV, QR-C51

DURNO
LV


12V ~50Hz
Material: steel



12V ~50Hz
Material: steel/brass



12V ~50Hz
Power consumption: 6W
Material: aluminium/stainless steel



Base: 1xGX5.3



Base: 1xGX5.3



Down 360lm | 2700K

Options	Prod. no.
● black	139100
○ white	139101
● chrome	139102

Options	Prod. no.
● black	139130
○ white	139131
● chrome	139132

Options	Prod. no.
● black	1002861
○ white	1002862
● chrome/stainless steel	1002863



LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h


Prod. no.: 1001574




LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no.: 1001574


1002864 490

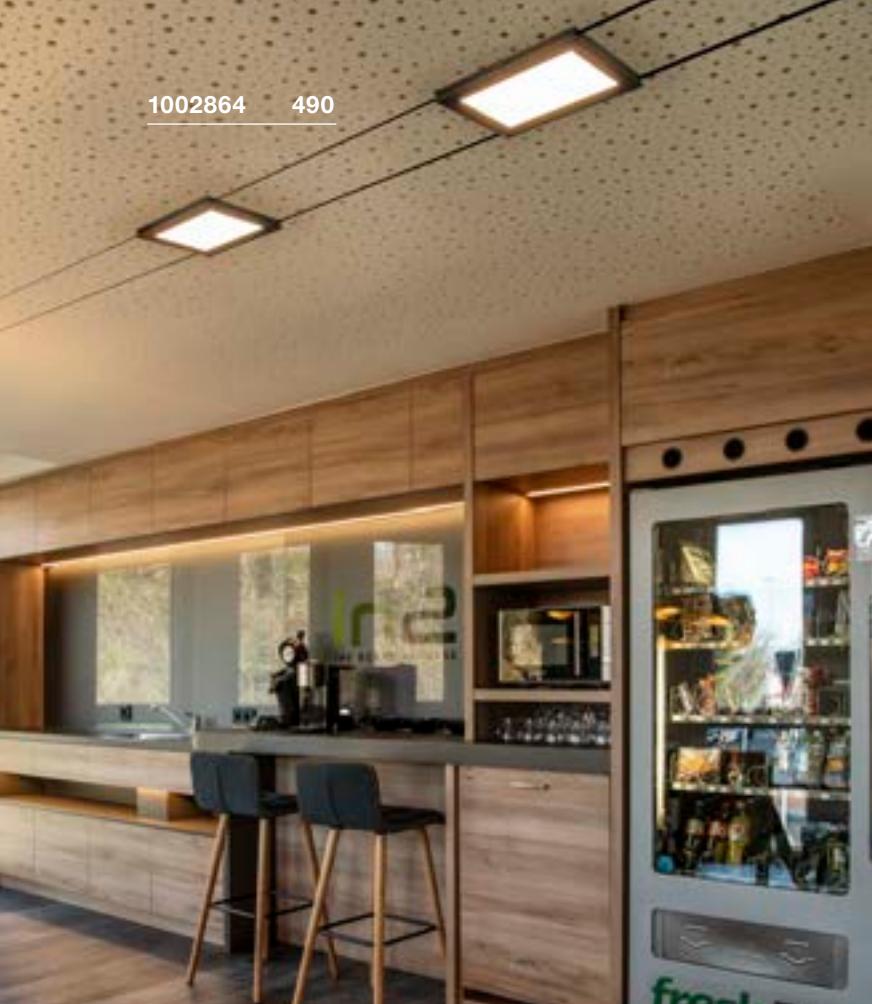

**PLYTTA
LV**



1002690 491



12V ~50Hz
Power consumption: 9.8W
Material: aluminium/plastic




Down 750lm | 2700K

Options	Prod. no.
<input checked="" type="radio"/> black CRI80	1002864
<input type="radio"/> white CRI90	1002865
<input checked="" type="radio"/> chrome CRI90	1002866



NOBLO® SPOT LV, Rope Track





12V ~50Hz
Power consumption: 8.5 W
Material: aluminium



Down 420lm | 2700K
450lm

Options	Prod. no.
● black 420lm	1002694
○ white 450lm	1002695
● chrome 450lm	1002696

COMET LED LV




12V ~50Hz
Power consumption: 6.6W
Material: aluminium/glass



Down 410lm | 2700K

Options	Prod. no.
● chrome/frosted	1002690

COMET LV, QR-C51



12V ~50Hz
Material: brass



Base: 1xGX5.3

Options	Prod. no.
● black	139120
○ white	139121
● chrome	139122



LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no.: **1001574**



1007354 503






					
LED NOBLO® SPOT 501	LED NOBLO® SPOT 501	LED NOBLO® SPOT 503	LED NOBLO® SPOT 503	SOCKET ASTO TUBE 505	SOCKET PANTILO ROPE 19 505
					
LED HELIA 50 TRACK 507	LED PANEL TRACK 507	LED PANEL TRACK 507	SOCKET PARA CONE GL 508	SOCKET PARA CONE GL 508	SOCKET PARA CONE 14 509
					
SOCKET PARA CONE 14 509	SOCKET TONGA® 511	SOCKET LIGHT EYE® 90 511	SOCKET LIGHT EYE® 150 511	SOCKET FORCHINI M 40 TRACK 512	SOCKET PURI TRACK 513
					
SOCKET PURI TRACK 513	SOCKET PURI TRACK 515	SOCKET AVÓ TRACK 515	LED ENOLA C TRACK 516	LED ENOLA C TRACK 517	SOCKET ENOLA B TRACK 517
					
SOCKET ENOLA B 517	SOCKET BIMA 519	SOCKET BIMA 519	LED KALU TRACK 520	SOCKET KALU TRACK 520	SOCKET EURO SPOT TRACK 521
					
SOCKET ALTRA DICE TRACK 521					

1000713 511



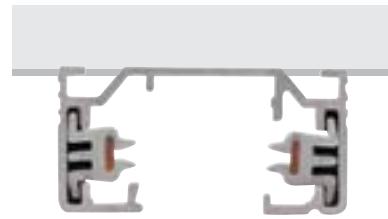

1-PHASE

MOUNTING TRACK



	1 m	1 m	1 m
Nominal voltage (V)	220-240V ~50/60Hz	250V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input checked="" type="radio"/> grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3.5 x 1.8	100 x 3.5 x 1.8	100 x 3.5 x 1.8
Prod. no.	143010	143011	143012

	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	250V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input checked="" type="radio"/> grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	200 x 3.5 x 1.8	200 x 3.5 x 1.8	200 x 3.5 x 1.8
Prod. no.	143020	143021	143022


	3 m	3 m	3 m
Nominal voltage (V)	250V ~50/60Hz	250V ~50/60Hz	250V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black	<input type="radio"/> white	<input checked="" type="radio"/> grey
Material	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 3.5 x 1.8	300 x 3.5 x 1.8	300 x 3.5 x 1.8
Prod. no.	1002151	1002152	1002153

1-PHASE

Mounting track

Planning tools and accessories at a glance

View of components from above on
the installation side

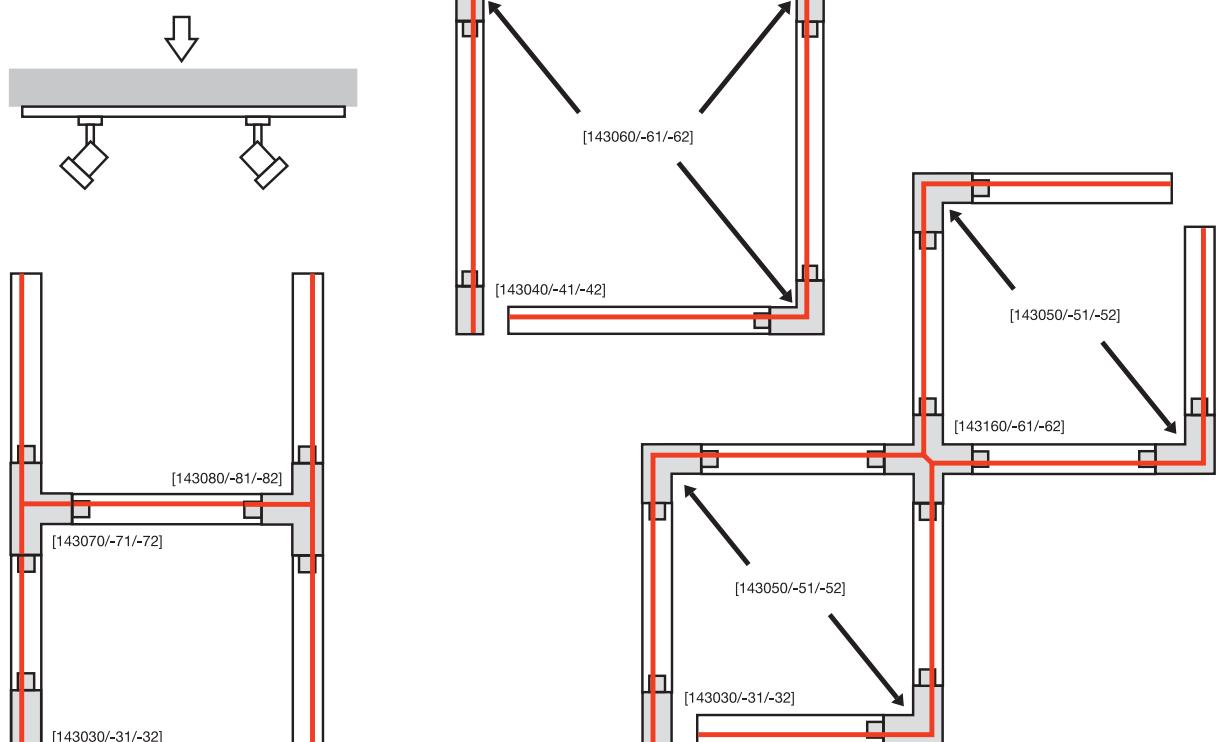

**Feed-in, earth left**

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143030**
- white Prod. no. **143031**
- grey Prod. no. **143032**

**Stabiliser, longitudinal connector**

Steel
L: 19.7 cm | W: 3.2 cm | H: 1.3 cm

For reinforcement when mounting several tracks with ceiling suspension (1002845)

- nickel Prod. no. **143151**

**Feed-in, earth right**

16 A max. | polycarbonate (PC)
L: 6.5 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143040**
- white Prod. no. **143041**
- grey Prod. no. **143042**

**Stabiliser, corner connector long**

Steel
L: 11.5 cm | W: 11.5 cm | H: 0.5 cm

For reinforcement when mounting several tracks with ceiling suspension (1002845)

- nickel Prod. no. **143152**

**Longitudinal connector with feed capacity**

16 A max. | polycarbonate (PC)
L: 17.2 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143100**
- white Prod. no. **143101**
- grey Prod. no. **143102**

**Stabilising X-connector**

Steel
L: 19.7 cm | W: 19.7 cm | H: 0.5 cm

For reinforcement when mounting several tracks with ceiling suspension (1002845)

- grey Prod. no. **143169**

**Longitudinal connector, electrical**

16 A max. | polycarbonate (PC)
L: 6.4 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143090**
- white Prod. no. **143091**
- grey Prod. no. **143092**

**1-phase adapter**

6 A max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

- black Prod. no. **143120**
- white Prod. no. **143121**
- grey Prod. no. **143124**

**Corner connector, earth inside**

16 A max. | polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

- black Prod. no. **143060**
- white Prod. no. **143061**
- grey Prod. no. **143062**

**1-phase adapter with hooks**

6 A max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 7.4 cm

- black Prod. no. **143170**
- white Prod. no. **143171**
- grey Prod. no. **143172**

**Corner connector, earth outside**

16 A max. | polycarbonate (PC)
L: 10.4 cm | W: 10.4 cm | H: 1.8 cm

- black Prod. no. **143050**
- white Prod. no. **143051**
- grey Prod. no. **143052**

**Cover**

Polycarbonate (PC)
L: 200 cm | W: 1.8 cm | H: 0.75 cm

- black Prod. no. **1004783**
- white Prod. no. **1004785**
- grey Prod. no. **1004784**

**T-connector, earth external, left**

16 A max. | polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

- black Prod. no. **143070**
- white Prod. no. **143071**
- grey Prod. no. **143072**

**End caps (2 pieces)**

Polycarbonate (PC)
L: 0.4 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143130**
- white Prod. no. **143131**
- grey Prod. no. **143132**

**T-connector, earth external, right**

16 A max. | polycarbonate (PC)
L: 17.2 cm | W: 10.4 cm | H: 1.8 cm

- black Prod. no. **143080**
- white Prod. no. **143081**
- grey Prod. no. **143082**

**Ceiling rosette**

6 A max. | polycarbonate (PC)
H: 2.5 cm Diameter: 11.5 cm

- black Prod. no. **143380**
- white Prod. no. **143381**
- grey Prod. no. **143382**

**X-connector**

16 A max. | polycarbonate (PC)
L: 9.5 cm | W: 17.2 cm | H: 1.8 cm

- black Prod. no. **143160**
- white Prod. no. **143161**
- grey Prod. no. **143162**

**Wire rope suspension (2 pieces)**

Stainless steel/brass
L: 500cm

- nickel Prod. no. **1002845**

**Flex connector**

16 A max. | polycarbonate (PC)
L: 16.4 cm | W: 3.5 cm | H: 1.8 cm

- black Prod. no. **143110**
- white Prod. no. **143111**
- grey Prod. no. **143112**


143580 507





1-PHASE

Recessed track with matching accessories

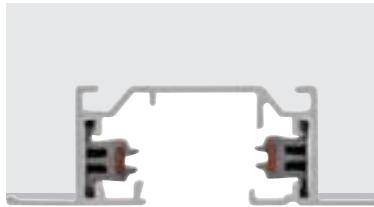

2 m

Nominal voltage (V)	250V ~50/60Hz
Max. current (A)	16
Colour	<input type="radio"/> white
Material	aluminium
L x W x H (cm)	200 x 5.5 x 1.8
Prod. no.	143221



Feed-in, earth left
16 A max. | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

white

Prod. no. **143231**



End cap
Plastic
L: 2.7 cm | W: 5.5 cm | H: 1.8 cm

white

Prod. no. **143281**



Feed-in, earth right
16 A max. | Plastic
L: 10.8 cm | W: 5.5 cm | H: 2 cm

white

Prod. no. **143241**



Retainer
Steel
L: 7.5 cm | W: 1.5 cm | H: 4 cm

nickel

Prod. no. **143230**



Longitudinal connector including longitudinal brace
16 A max. | plastic / steel
L: 6.5 cm | W: 1.8 cm | H: 1.7 cm

white

Prod. no. **143271**



1-phase adapter with hooks
6 A max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 7.4 cm

black

Prod. no. **143120**

white

143121

grey

143122



Corner connector, earth inside
16 A max. | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

white

Prod. no. **143261**



1-phase adapter
6 A max. | polycarbonate (PC)
L: 8.5 cm | W: 3.5 cm | H: 3.2 cm

black

Prod. no. **143120**

white

143121

grey

143124



Corner connector, earth outside
16 A max. | Plastic
L: 11.2 cm | W: 11.2 cm | H: 2 cm

white




Prod. no. **143251**

1007639 501





NOBLO® SPOT
1 phase, Triple Track Set



220-240V ~50/60Hz | 150mA

Total wattage: 19 W

Material: aluminium

220-240V ~50/60Hz | 150mA

Total wattage: 6.2W

Material: aluminium/polycarbonate (PC)



Down

2250lm | 2700K



Down

740lm | 2700K

Options	Prod. no.
<input checked="" type="radio"/> black	1007673
<input type="radio"/> white	1007674

Options	Prod. no.
<input checked="" type="radio"/> black	1007638
<input type="radio"/> white	1007639
<input type="radio"/> grey	1007640

1007352 503









NOBLO® SPOT
1 phase, PHASE



NOBLO® SPOT
1 phase, PHASE



220-240V ~50/60Hz | 150mA
Total wattage: 6.2W
Material: aluminium/polycarbonate (PC)

220-240V ~50/60Hz | 350mA
Total wattage: 8.4W
Material: aluminium/polycarbonate (PC)



Down

750lm | 3000K



Down

30lm | 2000K

- 450lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007641
<input type="radio"/> white	1007642
<input type="radio"/> grey	1007643

Options	Prod. no.
<input checked="" type="radio"/> black	1007352
<input type="radio"/> white	1007353
<input type="radio"/> grey	1007354

1006445 **505**





ASTO TUBE 1 phase, GU10




ASTO TUBE Decorative reflector




PANTILO ROPE 19 PD, E27




H: 3,95 cm
Diameter: 6,75 cm
Material: polycarbonate (PC)



Options	Prod. no.
● black/chrome	1007190
○ gold	1006450
○ chrome	1006449
● copper	1006451



220-240V ~50/60Hz
Material: aluminium



200-240V ~50/60Hz
Material: glass/steel/hemp

- Open cable end



Base: 1xGU10

Options	Prod. no.
● black	1006445
○ white	1006446



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



Base: 1xE27 Max. diameter: 10 cm L: 11 cm

Options	Prod. no.
● amber/gold	1007597
● anthracite/silver	1007596



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



143580 507



1004934 507



1004935 507










HELIA 50 TRACK 1 phase



PANEL TRACK 1 ph., square

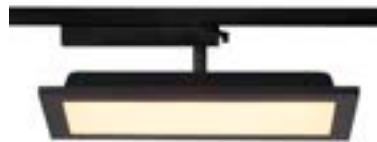

PANEL TRACK 1 ph., round



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium



220-240V ~50/60Hz | 450mA

Total wattage: 18W

Material: polycarbonate (PC)/steel



220-240V ~50/60Hz | 450mA

Total wattage: 18W

Material: polycarbonate (PC)/steel

Down	810lm 880lm	3000K
------	----------------	-------

Down	1800lm	3000K
------	--------	-------

Down	1800lm	3000K
------	--------	-------

Options	Prod. no.
<input checked="" type="radio"/> black 810lm	143580
<input type="radio"/> white 880lm	143581




Options	Prod. no.
<input checked="" type="radio"/> black	1004933
<input type="radio"/> white	1004934

Options	Prod. no.
<input checked="" type="radio"/> black	1004935
<input type="radio"/> white	1004936


PARA CONE GL
1 phase, GU10



PARA CONE GL
PD, GU10



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1006155
<input type="radio"/> white	1006156



LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G



Prod. no.: 1006321



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1006159
<input type="radio"/> white	1006160




LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G



Prod. no.: 1006321




Product	Prod. no.
1-phase adapter	
<input checked="" type="radio"/> black	143120
<input type="radio"/> white	143121
<input type="radio"/> grey	143124

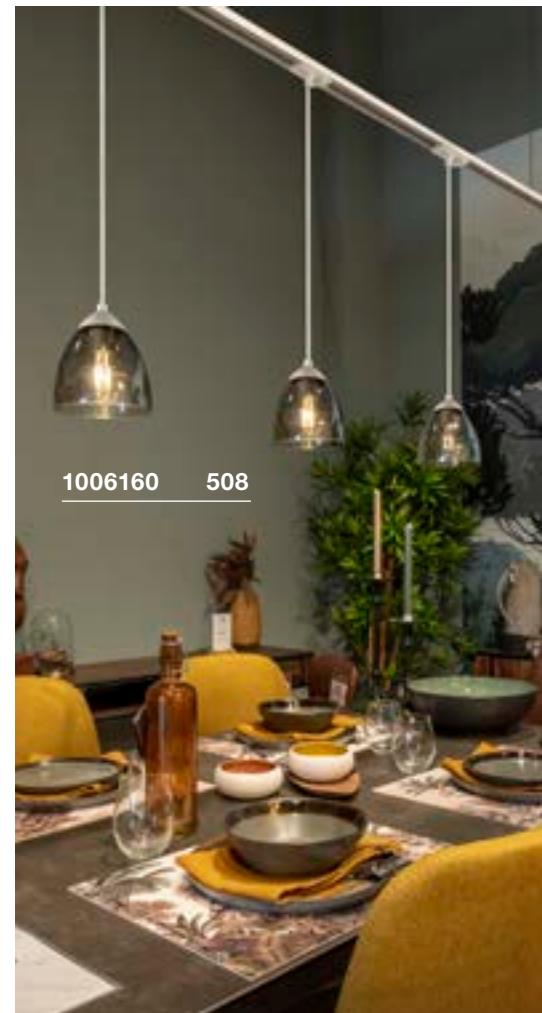






1006155 508

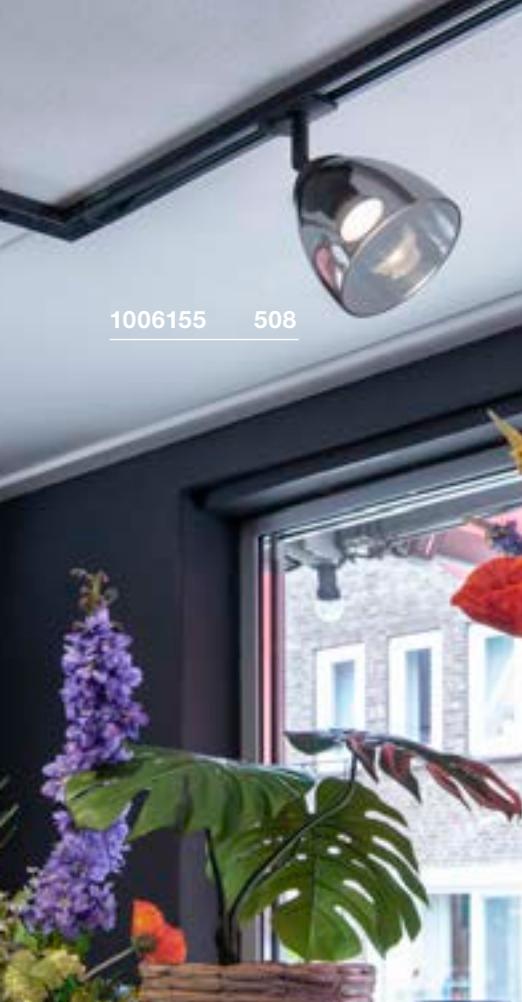


PARA CONE 14
1 phase, QPAR51

PARA CONE 14
1 phase, PD, QPAR51



220-240V ~50/60Hz
Material: steel



220-240V ~50/60Hz
Material: aluminium

- Textile cable
- black/gold version with golden reflector
- all other versions with white reflector



1002875 509

SOCKET INSIDE <25 W

Base: 1xGU10

Options	Prod. no.
● black	1002873
○ white	1002874
● copper	1002875



LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G

Prod. no.: 1006321

SOCKET INSIDE <35 W

Base: 1xGU10


Options	Prod. no.
● black	143990
○ white	143991
● copper	1001968



LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G



Prod. no.: 1006321



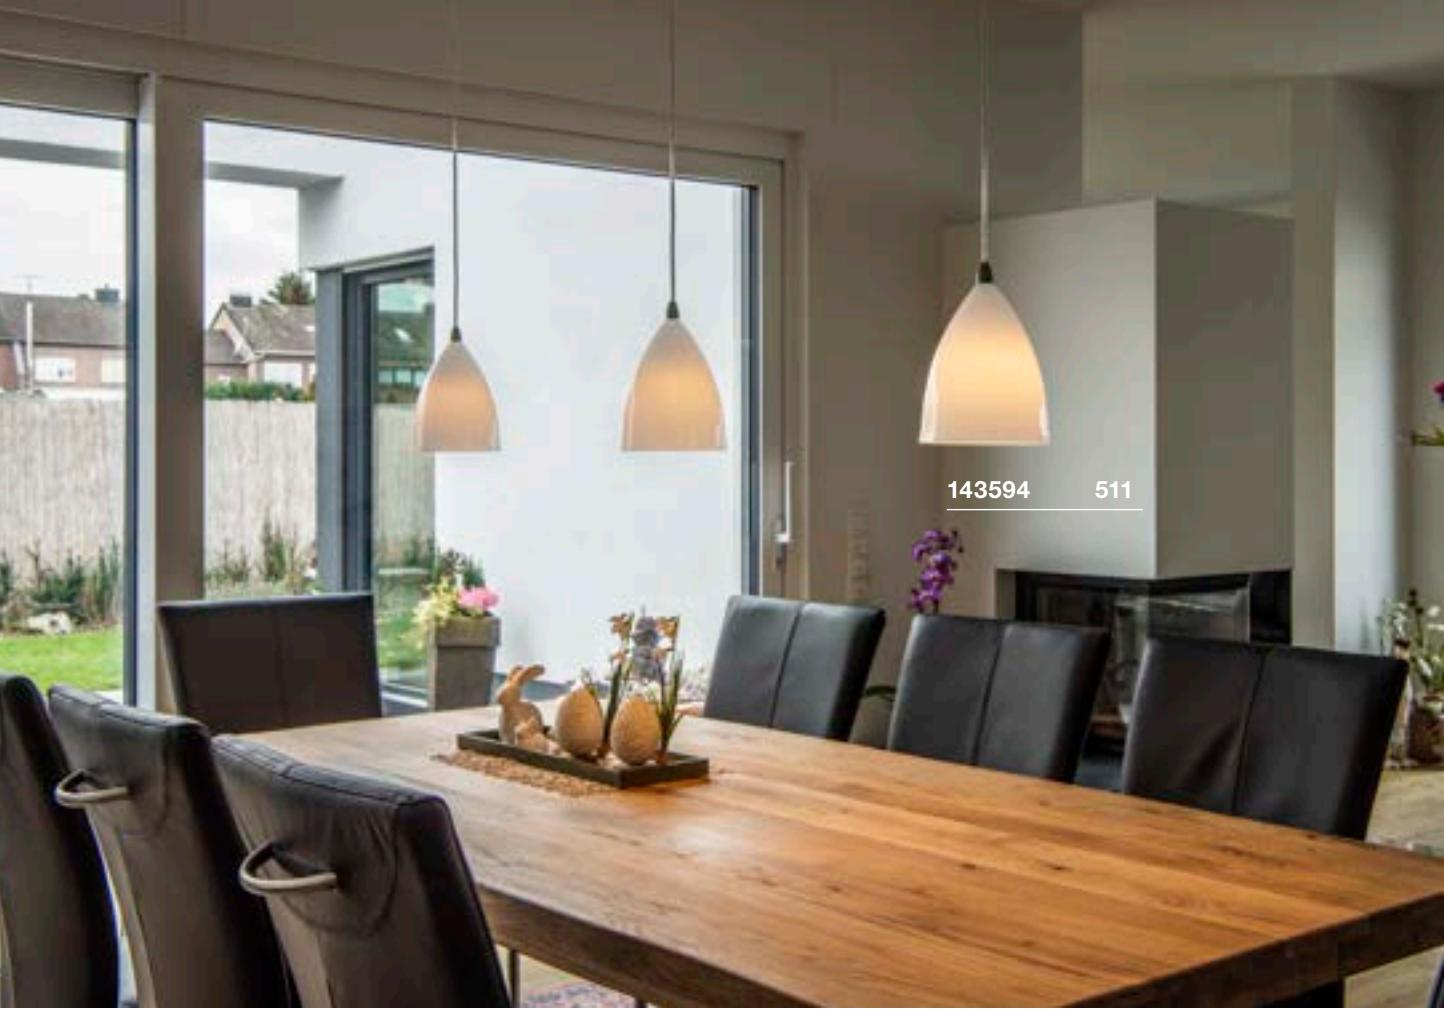



TONGA®
1 phase, PD, E14



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xE14


Max. diameter: 5.1 cm

L: 13 cm

Options	Prod. no.
<input checked="" type="radio"/> grey / milky	143594

C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285



230V ~50/60Hz
Material: steel





Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	144010
<input type="radio"/> white	144011
<input type="radio"/> copper	144019

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: 1005273

LIGHT EYE® 90
1 phase, QPAR51



220-240V ~50/60Hz
Material: steel



Base: 1xGU10



Options	Prod. no.
<input checked="" type="radio"/> black	1000713
<input type="radio"/> white	143621

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



FORCHINI M 40 TRACK
1 phase, E27



220-240V ~50/60Hz
Material: aluminium/steel

- Pendant light adapter colour silver-grey [143930] / black [143932]



Base: 1xE27 Max. diameter: 6.8 cm L: 15.2 cm

Options	Prod. no.
● black/gold	143930
● black/gold	143932




A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305






PURI TRACK
1 phase, Triple Track Set



PURI TRACK
1 phase, QPAR51




PURI TRACK
1 phase, QPAR51



220-240V ~50/60Hz
Total wattage: 4.3W
Material: aluminium


- Consists of 2 x 1 m tracks.
- 1 longitudinal connector with feed-in.
- 1 x 2 end caps.
- 3 x PURI light head.
- 3 x LED GU10 lamp.
- 3 x decorative ring for GU10



220-240V ~50/60Hz
Material: aluminium/plastic





Base: 1xGU10



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- Decorative ring included



Options	Prod. no.
● black	143190
○ white	143191

Options	Prod. no.
● black	1001868
○ white	1001869

Options	Prod. no.
● black	143390
○ white	143391
● grey	143392



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h


Prod. no.: 1005075





143450

515

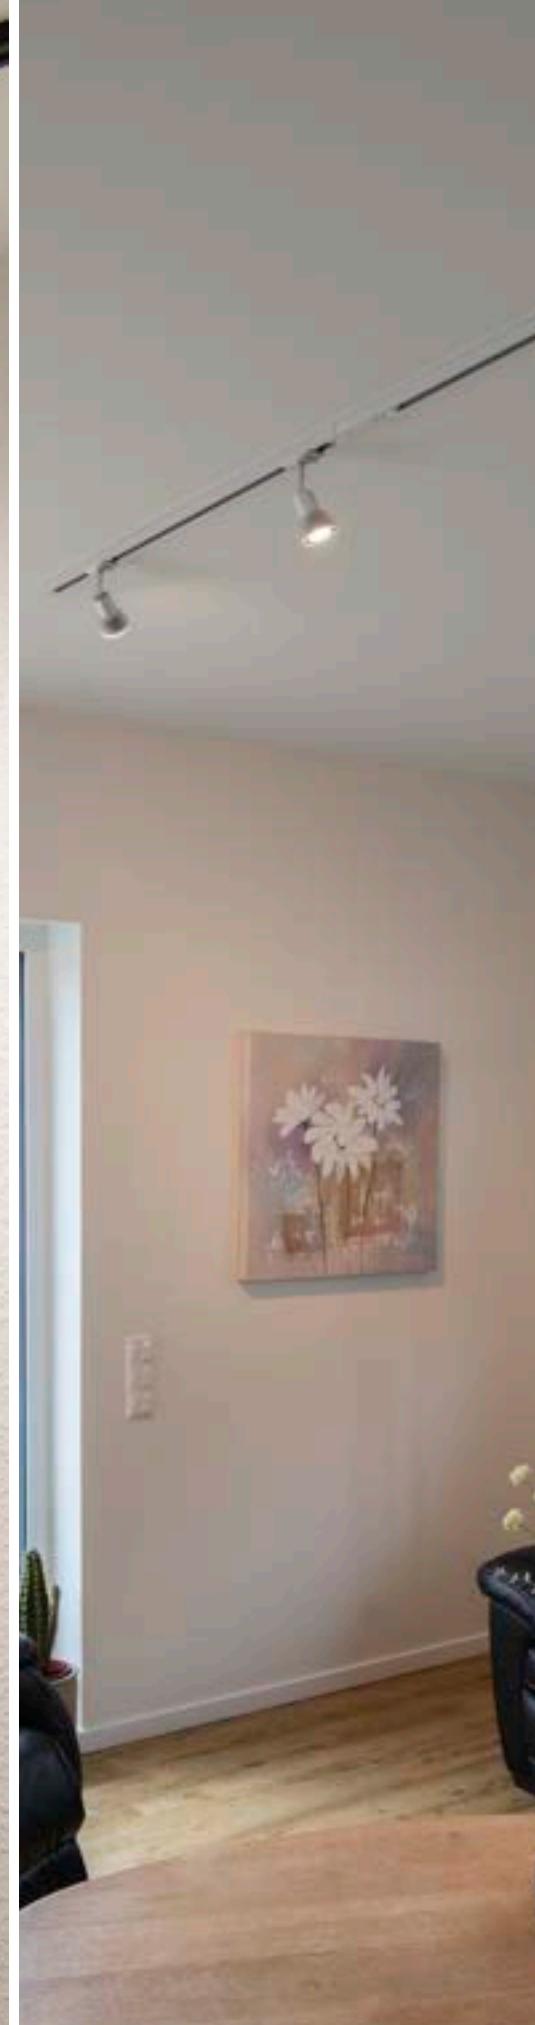






PURIA TRACK
1 phase, QPAR51

143451 **515**



AVO TRACK
1 phase, QPAR51



220-240V ~50/60Hz
Material: aluminium/plastic




Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	143450
<input type="radio"/> white	143451
<input type="radio"/> grey	143454



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h

Prod. no.: **1005273**



220-240V ~50/60Hz
Material: steel



Base: 1xGU10

Max. diameter: 5.1 cm

Options	Prod. no.
<input checked="" type="radio"/> black	144200
<input type="radio"/> white	144201
<input type="radio"/> grey	144204




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



ENOLA C TRACK
1 phase



220-240V ~50/60Hz | 500mA

Total wattage: 11W


Material: aluminium/glass



Down


1040lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1000711
<input type="radio"/> white	143941

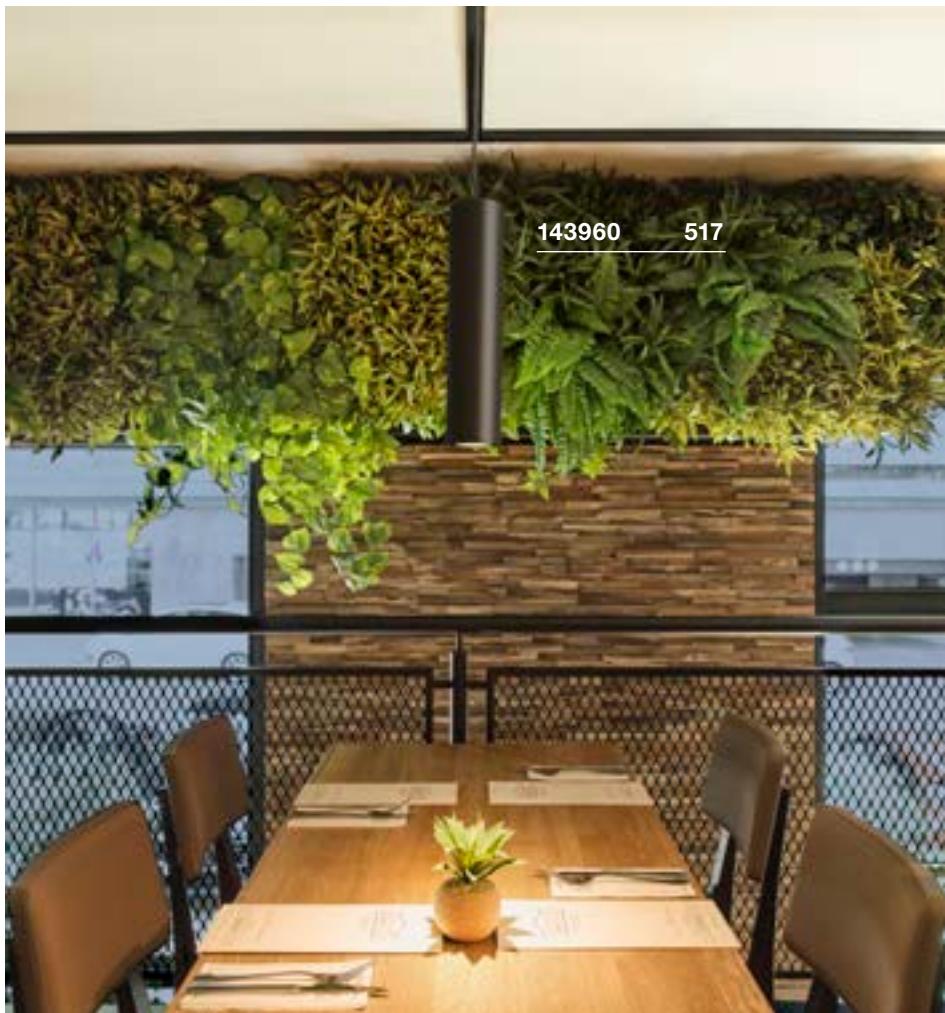



ENOLA C TRACK 1 phase





220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass



ENOLA B TRACK 1 phase, QPAR51



220-240V ~50/60Hz

Material: aluminium/steel

ENOLA B PD, QPAR51



220-240V ~50/60Hz

Material: aluminium/steel



Down

1040lm | 3000K



Base: 1xGU10

Max. diameter: 5.1 cm

L: 6.7 cm



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1000712
<input type="radio"/> white	143951

Options	Prod. no.
<input checked="" type="radio"/> black	1002110
<input type="radio"/> white	1002111
<input checked="" type="radio"/> grey	1002113

Options	Prod. no.
<input checked="" type="radio"/> black	143960
<input type="radio"/> white	143961



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005075**


LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**

143440 519




143430 519

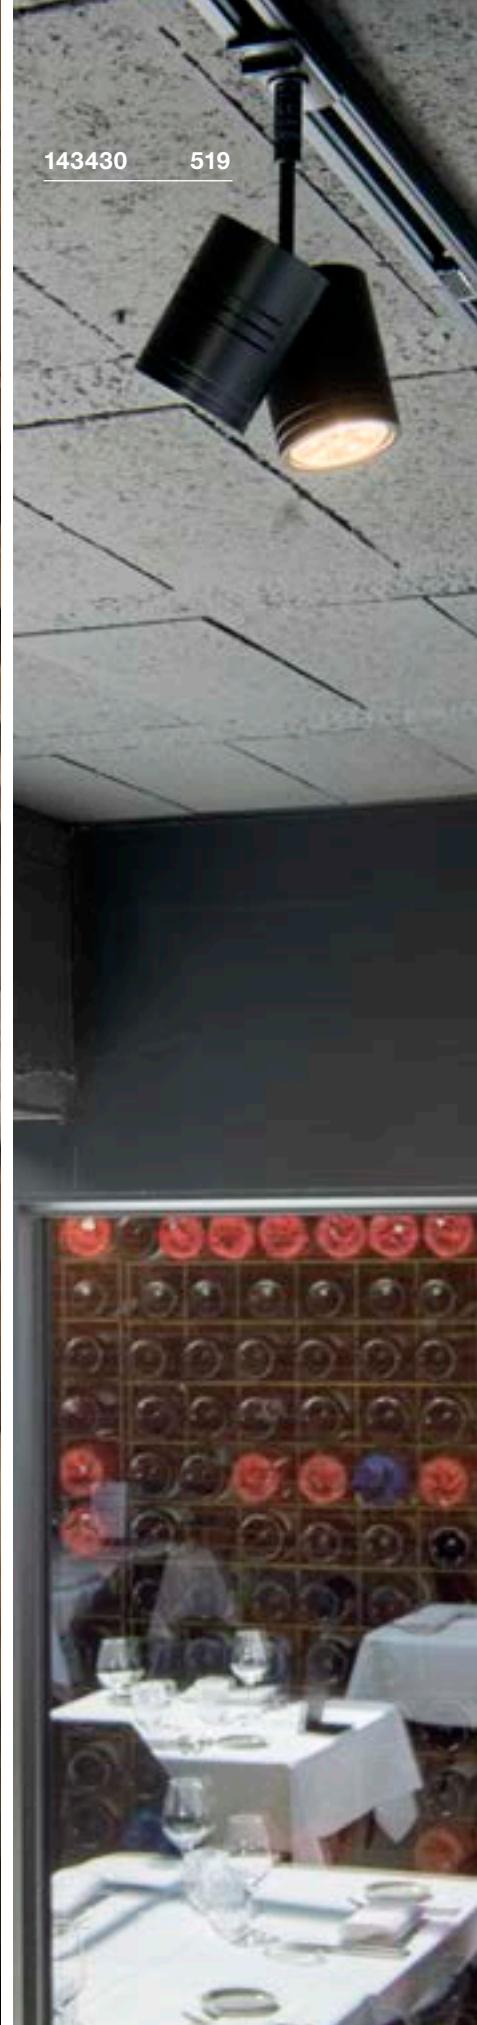



BIMA
1 phase, single, QPAR51



IP 20
 350°
 200°

220-240V ~50/60Hz
Material: aluminium

SOCKET
INSIDE <50 W

Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm


Options	Prod. no.
● black	143440
○ white	143441
● grey	143442



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075

BIMA
1 phase, double, QPAR51



IP 20
 350°
 200°

220-240V ~50/60Hz
Material: aluminium

SOCKET
INSIDE <50 W

Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● black	143430
○ white	143431
● grey	143432






LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h


Prod. no.: 1005077

KALU TRACK
1 phase, PHASE

KALU TRACK
1 phase, QPAR111



220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium



220-240V ~50/60Hz
Material: aluminium/plastic



Down 970lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1002854
<input type="radio"/> white	143731



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	143540
<input type="radio"/> white	143541
<input type="radio"/> grey	143544




QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h


Prod. no.: **1005278**



1002854 520

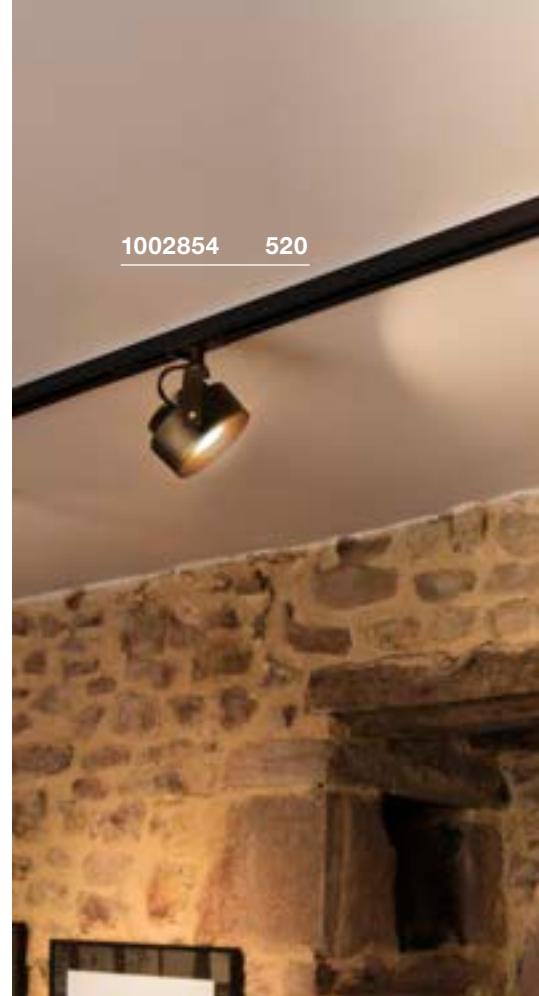





1001861 521

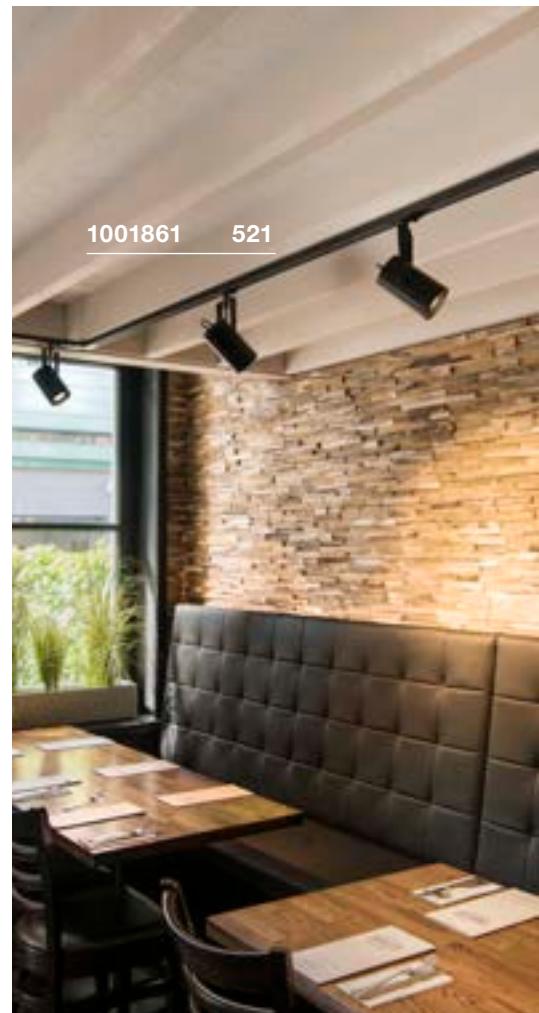



EURO SPOT TRACK
1 phase, QPAR51

ALTRA DICE TRACK
1 phase, QPAR51



220-240V ~50/60Hz
Material: aluminium

220-240V ~50/60Hz
Material: aluminium



143350 521



Base: 1xGU10

Options	Prod. no.
● black	1001861
○ white	143811



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**



Base: 1xGU10

Options	Prod. no.
● black	143350
○ white	143351
● grey	143354



LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no.: **1005273**

DESIGN YOUR HIGH-VOLTAGE TRACK SYSTEM

Professionally managed: well-designed lighting is essential, especially where there's plenty to see. Due to the versatility of track lighting, it's possible to showcase specific objects in the perfect light. Changes to the lighting design can also be made at any time. 3-phase high-voltage busbars are perfect for shops and exhibition stands. They create the perfect illumination and present products and exhibition items in just the right light. 1-phase high-voltage busbars are particularly suitable for private homes and bathe your living space in atmospheric light. Thanks to the boreholes present in their cross-section, these aluminium tracks can be attached to your ceiling quickly and easily. You can choose from a recessed version and a surface-mounted version, and both are available in multiple colours.

CHOOSE YOUR PREFERRED ...

- ① track (S-TRACK, EUTRAC, 1-phase system)
- ② Assembly type (recessed/mounting track)
- ③ Lights
- ④ Design options




DONE!

TRACK SYSTEMS

S-TRACK
3-phase system



EUTRAC
3-phase system



1-PHASE SYSTEM




Recessed track Mounting track



Ceiling Wall Pendant

Mounting options

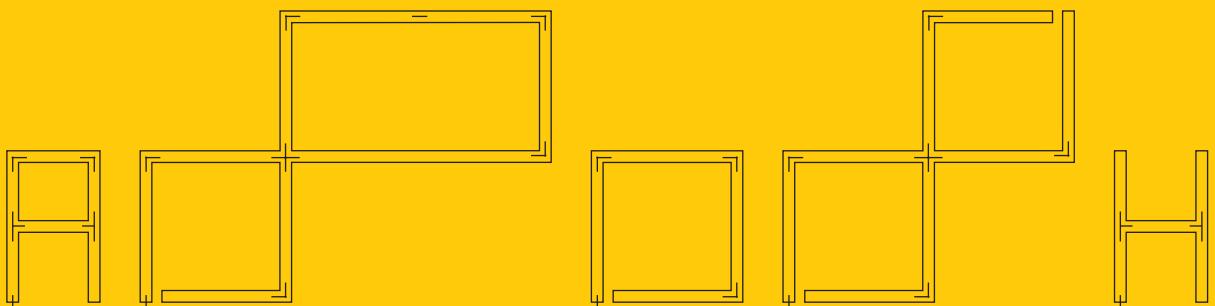

Various design options tailored to your room

Use our track configurator at slv.com



1006159 552



TS V | 543



TS V | 543



NOBLO® SPOT | 545



NOBLO® SPOT | 545



NOBLO® SPOT | 547



NOBLO® SPOT | 547

**SOCKET**
PANTILO
ROPE 19 | 549LED
SIGHT TRACK | 550LED
SIGHT TRACK | 550LED
SIGHT MOVE | 551LED
SIGHT MOVE | 551**SOCKET**
PARA CONE GL | 552**SOCKET**
PARA CONE GL | 552**SOCKET**
PARA CONE 14 | 553**SOCKET**
PARA CONE 14 | 553**SOCKET**
FORCHINI M 40
TRACK | 554LED
EURO CUBE | 555**SOCKET**
EURO SPOT
TRACK | 555**SOCKET**
EURO SPOT
TRACK | 555**SOCKET**
ALTRA DICE
TRACK | 556**SOCKET**
PURI TRACK | 557**SOCKET**
PURI TRACK
GLASS | 557LED
KALU TRACK
LED | 558**SOCKET**
KALU TRACK | 558

BIMA | 559

**SOCKET**
BIMA | 559LED
HELIA 50 TRACK | 561LED
ENOLA C TRACK | 561**SOCKET**
AVO TRACK | 561

3-PHASE BUSBAR COMPATIBILITY

Compatible with lights/adapters from:

	SLV	Global/Nordic	EUTRAC®
DALI S-TRACK SLV tracks and track components 			
without DALI	✓	✓	★
with DALI	✓	✓	✗



Compatible with tracks and track components from:

	SLV S-TRACK	Global/Nordic	EUTRAC®
DALI S-TRACK SLV lights 			
without DALI	✓	✓	✓
with DALI	✓	✓	✓ ★★

★ Subject to prior testing using light and track samples
★★ But without DALI functionality

The SLV track systems and components are highly compatible.
 With lights and adapters from: EUTRAC®, Zumtobel, Erco, LTS ONETrack
 and unipro®. Subject to prior testing using light and track samples.

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓

Zumtobel	Erco	LTS ONETrack	unipro®
			
✓	✓	✓	✓

Details not guaranteed.

Technical data and dimensions are subject to change without notice.

During the planning phase of the project, check the project using samples to ensure functionality.

Compatibility refers only to tracks/lights.


Tracks and track components from different manufacturers should not be combined.





S-TRACK

3-phase DALI surface-mounted track

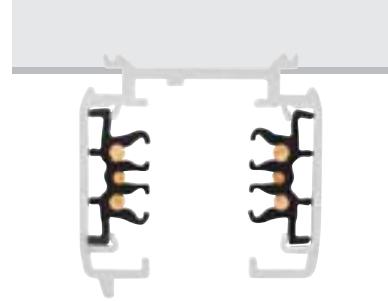


	1 m	1 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	1004937	1004938	1002631	1002632

	3 m	3 m	4 m	4 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black ○ white	○ white	● black ○ white	○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6	400 x 3.6 x 3.6	400 x 3.6 x 3.6
Prod. no.	1002633	1002634	1002635	1002636

S-TRACK

3-phase DALI surface-mounted track
Planning assistance and accessories at a glance

View of components from above on the installation side

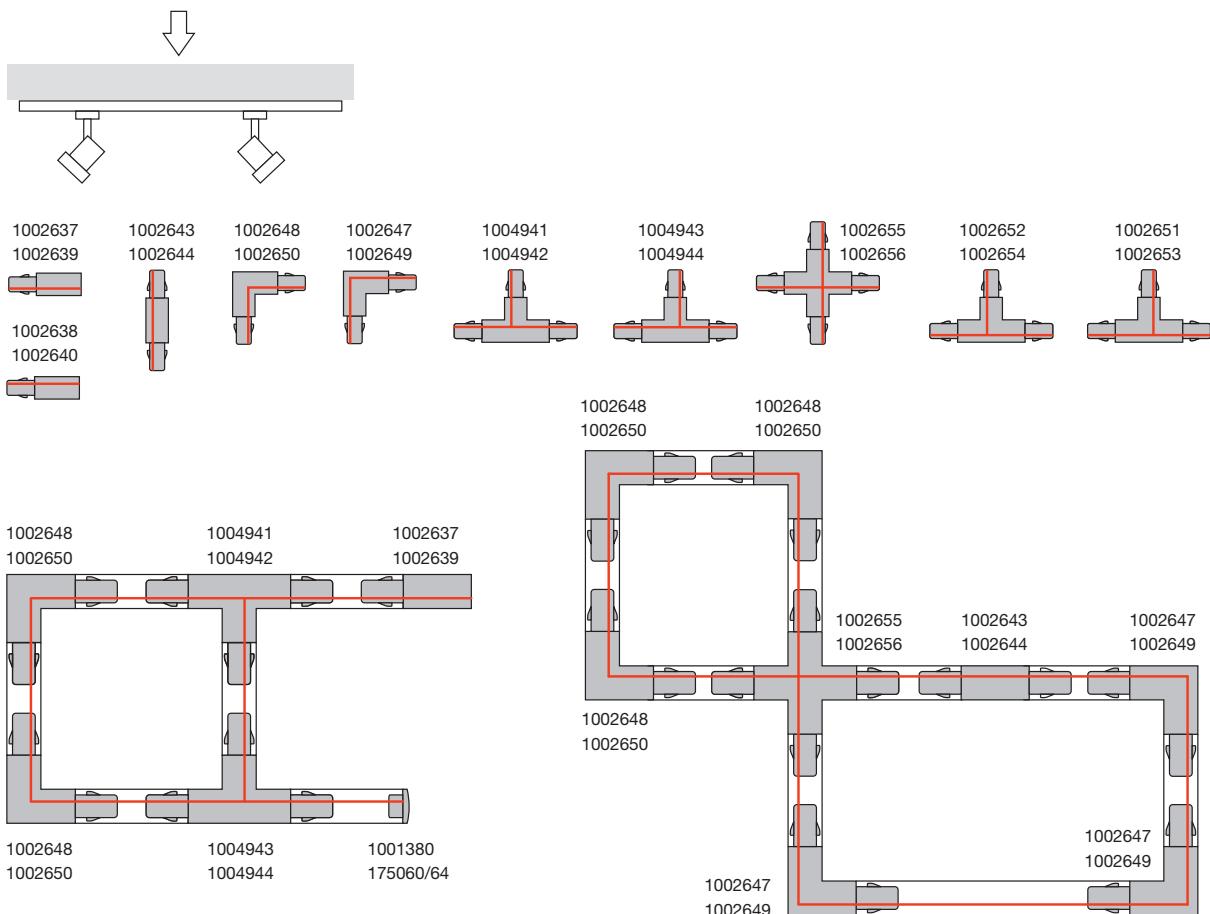

Feeder, DALI, earth left
16A max. | Polycarbonate (PC) /
Polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm



L-connector, DALI, earth outside*
16 A max. | polycarbonate (PC)
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm



Feed-in, Dali, earth right
16 A max. | polycarbonate (PC)
L: 13.9 cm | W: 3.5 cm | H: 3.3 cm



L-connector, DALI, earth inside*
16 A max. | polycarbonate (PC)
L: 11.9 cm | W: 11.9 cm | H: 3.3 cm



T-connector, DALI, earth external, left*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

black Prod. no. **1002652**
 white Prod. no. **1002654**



T-connector, DALI, earth external, right*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

black Prod. no. **1002651**
 white Prod. no. **1002653**



T-connector, DALI, earth internal left*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

black Prod. no. **1004941**
 white Prod. no. **1004942**



T-connector, DALI, earth internal right*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 11.9 cm | H: 3.3 cm

black Prod. no. **1004943**
 white Prod. no. **1004944**



X-connector, DALI*
16A max. | Polycarbonate (PC) / Polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

black Prod. no. **1002655**
 white Prod. no. **1002656**



Longitudinal connector, DALI*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 3.5 cm | H: 3.3 cm

black Prod. no. **1002643**
 white Prod. no. **1002644**



Mini-connector, DALI
16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

black Prod. no. **1002641**
 white Prod. no. **1002642**



Flex connector, DALI
16 A max. | polycarbonate (PC)
L: 28.5 cm | W: 3.5 cm | H: 3.3 cm

black Prod. no. **1002645**
 white Prod. no. **1002646**



Insulating connector
plastic
L: 6.8 cm | W: 3.1 cm | H: 2.6 cm

black Prod. no. **175080**
 white Prod. no. **1001382**



Pendant clip, DALI
Steel
L: 4 cm | W: 3.4 cm | H: 1.25 cm

black Prod. no. **1002657**
 white Prod. no. **1002658**



3 phase Adapter, DALI
10 A max. | Polycarbonate (PC)
L: 11.3 cm | W: 5.5 cm | H: 3.3 cm

black Prod. no. **1002660**
 white Prod. no. **1002659**



Mech. 3 phase Adapter
Aluminium / plastic
L: 6.6 cm | W: 6.6 cm | H: 3.1 cm

black Prod. no. **175210**
 white Prod. no. **1001395**



Cover, 2m
Polycarbonate (PC)
L: 200 cm | W: 2.2 cm | H: 0.75 cm

black Prod. no. **1004939**
 white Prod. no. **1004940**



End cap
plastic
L: 3.5 cm | W: 3.3 cm | H: 3.2 cm

black Prod. no. **175060**
 white Prod. no. **1001380**



Pendant suspension
Aluminium / plastic
L: 6 cm | W: 6 cm | H: 4 cm
max. mechanical load: 10 kg

black Prod. no. **175160**
 white Prod. no. **1001390**



Joint connector
aluminium
L: 18.2 cm | W: 3.3 cm | H: 2.1 cm

black Prod. no. **175180**
 white Prod. no. **1001392**



Mech. 3 phase Adaptor with hook
Plastic/steel
H: 5.2 cm
max. mechanical load: 10 kg

black Prod. no. **175190**
 white Prod. no. **1001393**



Ceiling rosette, DALI
16 A max. | polycarbonate (PC)
H: 3.5 cm Diameter: 14.3 cm

black Prod. no. **1004684**
 white Prod. no. **1004685**



Wire rope suspension (2 pieces)
Stainless steel/brass
L: 500cm
max. mechanical load: 10 kg

nickel Prod. no. **1002845**

* with feed capacity






NEW

S-TRACK

DALI 3-phase recessed track

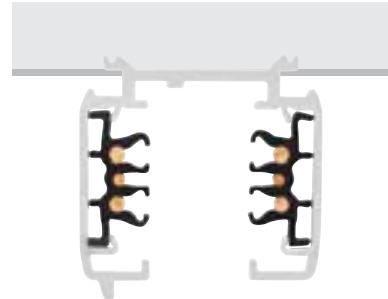

	1 m	1 m	2 m	2 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black ○ white	● black ○ white	● black ○ white	● black ○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	100 x 5.6 x 3.2	100 x 5.6 x 3.2	200 x 5.6 x 3.2	200 x 5.6 x 3.2
Prod. no.	1006511 ●	1006512 ●	1006513 ●	1006514 ●


	3 m	3 m	4 m	4 m
Nominal voltage (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
Max. current (A)	16	16	16	16
max. mech. load	30 kg	30 kg	30 kg	30 kg
Colour	● black ○ white	● black ○ white	● black ○ white	● black ○ white
Material	aluminium	aluminium	aluminium	aluminium
L x W x H (cm)	300 x 5.6 x 3.2	300 x 5.6 x 3.2	400 x 5.6 x 3.2	400 x 5.6 x 3.2
Prod. no.	1006515 ●	1006516 ●	1006517 ●	1006518 ●

NEW

S-TRACK

DALI 3-phase recessed track
Planning assistance and accessories at a glance

View of components from above on
the installation side

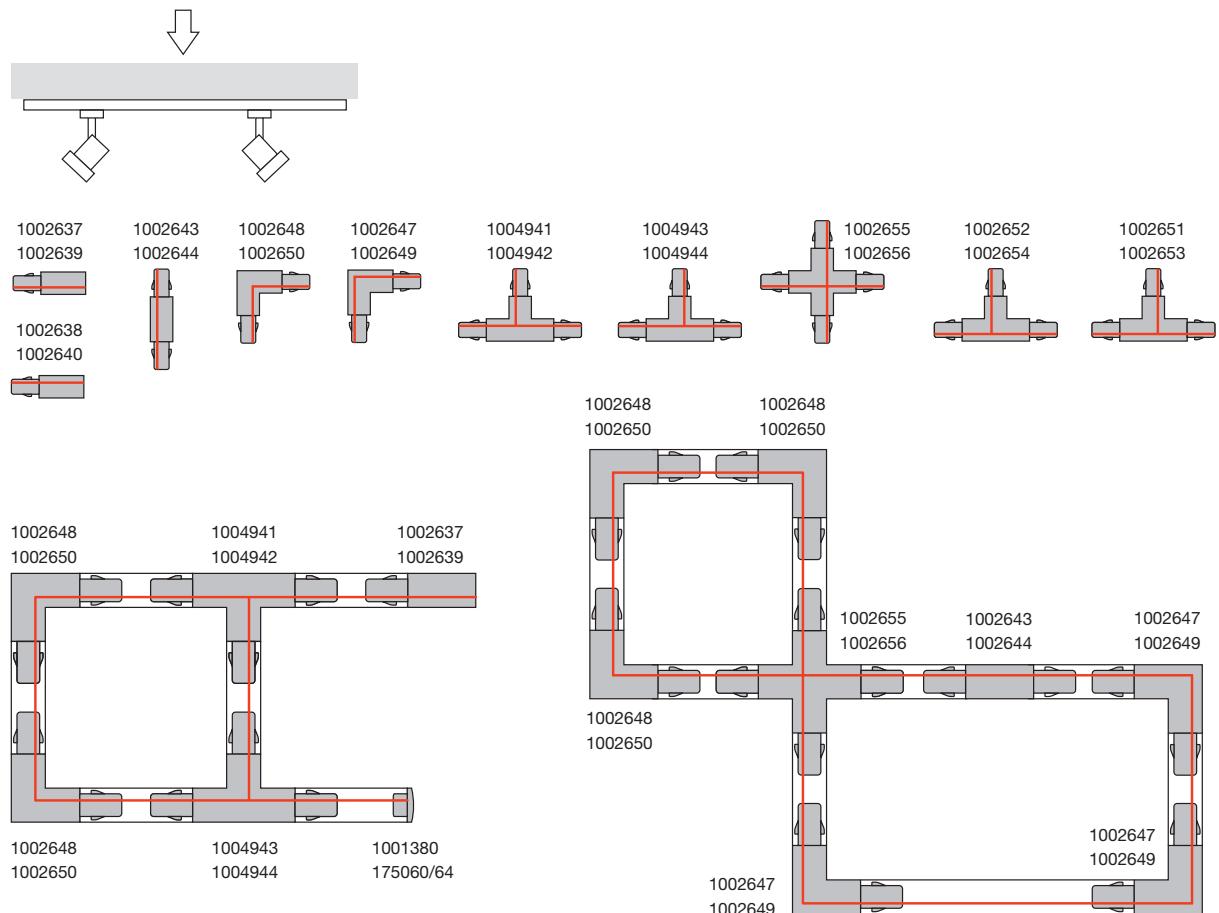



Feeder, DALI, earth right
16 A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006519**
1006520



Feeder, DALI, earth left
16 A max. | polycarbonate (PC)
L: 14.7 cm | W: 5.6 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006521**
1006522



L-connector, DALI, earth outside*
16 A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006525**
1006526



L-connector, DALI, earth inside*
16 A max. | polycarbonate (PC)
L: 13 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006523**
1006524



T-connector, DALI, earth external, left*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006529**
1006530



T-connector, DALI, earth internal right*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006531**
1006532



T-connector, DALI, earth external, right*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006533**
1006534



T-connector, DALI, earth internal left*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 13 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006527**
1006528



X-connector, DALI*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 20.3 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006535**
1006536



Longitudinal connector, DALI*
16 A max. | polycarbonate (PC)
L: 20.3 cm | W: 5.6 cm | H: 3.3 cm

● black
○ white

Prod. no. **1006537**
1006538



Mini-connector, DALI
16 A max. | polycarbonate (PC)
L: 10.6 cm | W: 2.5 cm | H: 2.8 cm

● black
○ white

Prod. no. **1002641**
1002642




End cap, DALI
Polycarbonate (PC)
L: 4.79 cm | W: 5.6 cm

● black
○ white

Prod. no. **1006539**
1006540

* with feed capacity



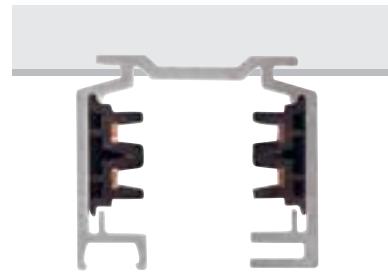

EUTRAC®

3-phase surface-mounted track



	1 m	1 m	1 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black <input type="radio"/> white <input type="radio"/> grey	<input type="radio"/> white <input checked="" type="radio"/> grey	<input checked="" type="radio"/> grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	100 x 3.6 x 3.2	100 x 3.6 x 3.2	100 x 3.6 x 3.2
Prod. no.	145100	1001510	145102


	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black <input type="radio"/> white <input type="radio"/> grey	<input type="radio"/> white <input checked="" type="radio"/> grey	<input checked="" type="radio"/> grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	200 x 3.6 x 3.2	200 x 3.6 x 3.2	200 x 3.6 x 3.2
Prod. no.	145200	1001511	145202

	3 m	3 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Colour	<input checked="" type="radio"/> black <input type="radio"/> white <input type="radio"/> grey	<input type="radio"/> white <input checked="" type="radio"/> grey	<input checked="" type="radio"/> grey
Material	Aluminium / plastic	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	300 x 3.6 x 3.2	300 x 3.6 x 3.2	300 x 3.6 x 3.2
Prod. no.	145300	1001512	145302


EUTRAC®

3-phase surface-mounted track
Planning assistance and accessories at a glance

View of components from above on
the installation side

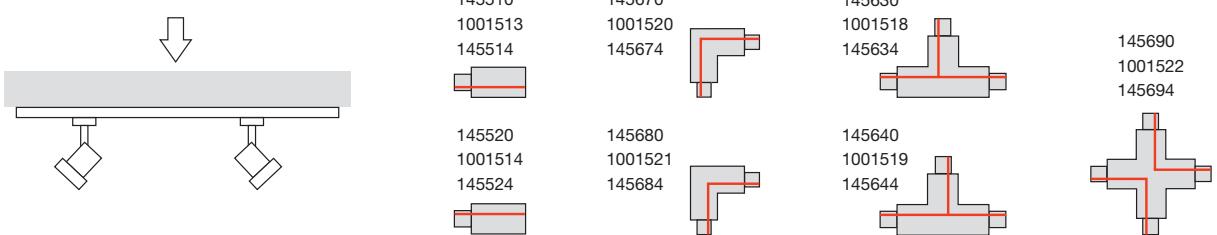

Example: earth external

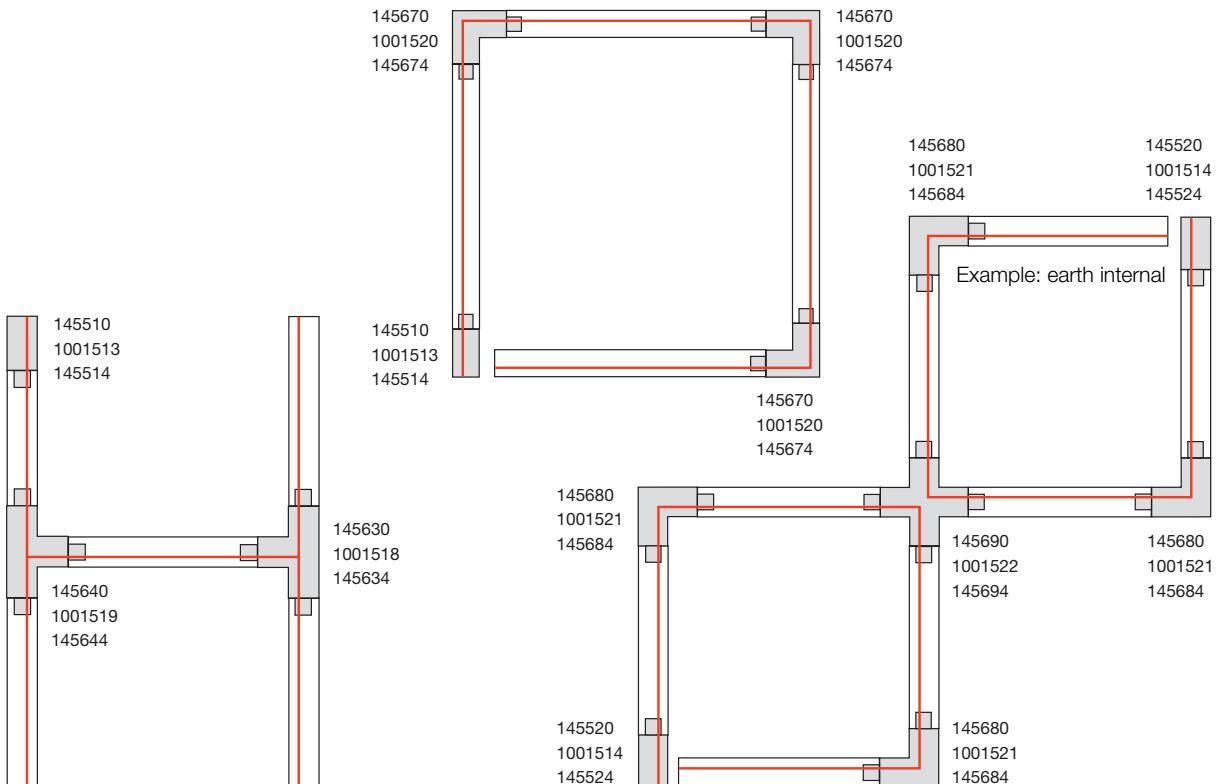

**Feed-in, earth left**

16 A max. | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145510 |
| <input type="radio"/> white | 1001513 |
| <input type="radio"/> grey | 145514 |

Joint connector

plastic
L: 10 cm | W: 3.6 cm | H: 1.9 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145600 |
| <input type="radio"/> white | 1001523 |
| <input type="radio"/> grey | 145604 |

Feed-in, earth right

16 A max. | Plastic
L: 11.2 cm | W: 3.6 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145520 |
| <input type="radio"/> white | 1001514 |
| <input type="radio"/> grey | 145524 |

Flex connector

16 A max. | Plastic
L: 30.7 cm | W: 3.6 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145580 |
| <input type="radio"/> white | 1001524 |
| <input type="radio"/> grey | 145584 |

Central feed

16 A max. | Plastic
L: 13 cm | W: 3.6 cm | H: 3.6 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145530 |
| <input type="radio"/> white | 1001515 |
| <input type="radio"/> grey | 145534 |

**Socket**

6.3 A max. | Plastic
L: 9.6 cm | W: 6.5 cm | H: 9 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145700 |
| <input type="radio"/> white | 1001525 |

Longitudinal connector*

16 A max. | Plastic
L: 19.2 cm | W: 3.6 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145660 |
| <input type="radio"/> white | 1001517 |
| <input type="radio"/> grey | 145664 |

**3-phase**

10A max. | Plastic
L: 9.6 cm | W: 3.5 cm | H: 4.5 cm
Max. mechanical load 20N.: 5 kg

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145990 |
| <input type="radio"/> white | 1001524 |
| <input type="radio"/> grey | 145994 |

Longitudinal connector*

16 A max. | Plastic
L: 5.8 cm | W: 1.5 cm | H: 2.6 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145560 |
| <input type="radio"/> white | 1001516 |
| <input type="radio"/> grey | 145564 |

**Pendant clip**

aluminium
L: 5 cm | W: 3.6 cm | H: 1.9 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145730 |
| <input type="radio"/> white | 1001530 |
| <input type="radio"/> grey | 145734 |

L-connector, earth internal*

16 A max. | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145680 |
| <input type="radio"/> white | 1001521 |
| <input type="radio"/> grey | 145684 |

**Universal point outlet**

16 A max. | Plastic
H: 3.1 cm Diameter: 11.9 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145830 |
| <input type="radio"/> white | 1001526 |
| <input type="radio"/> grey | 145834 |

L-connector, earth external*

16 A max. | Plastic
L: 15 cm | W: 15 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145670 |
| <input type="radio"/> white | 1001520 |
| <input type="radio"/> grey | 145674 |

**End cap**

plastic
L: 3.6 cm | W: 1.7 cm | H: 3.2 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145590 |
| <input type="radio"/> white | 1001527 |
| <input type="radio"/> grey | 145594 |

T-connector, earth internal left*

16 A max. | Plastic
L: 26 cm | W: 18.5 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145630 |
| <input type="radio"/> white | 1001518 |
| <input type="radio"/> grey | 145634 |

**Pendant suspension, rigid**

Plastic/steel
L: 60 cm | H: 63.5 cm Diameter: 7 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145720 |
| <input type="radio"/> white | 1001529 |
| <input type="radio"/> grey | 145724 |

T-connector, earth internal right*

16 A max. | Plastic
L: 26 cm | W: 18.5 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145640 |
| <input type="radio"/> white | 1001519 |
| <input type="radio"/> grey | 145644 |

**Pendant suspension, rigid**

Plastic/steel
H: 122 cm Diameter: 7 cm

- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145710 |
| <input type="radio"/> white | 1001528 |
| <input type="radio"/> grey | 145714 |

X connector*

16 A max. | Plastic
L: 26 cm | W: 26 cm | H: 3.2 cm



- | | |
|----------------------------------------|------------------|
| <input checked="" type="radio"/> black | Prod. no. 145690 |
| <input type="radio"/> white | 1001522 |
| <input type="radio"/> grey | 145694 |

**Wire rope suspension (2 pieces)**

Stainless steel/brass
L: 500cm
max. mechanical load: 10 kg

- | | |
|-----------------------------------------|-------------------|
| <input checked="" type="radio"/> nickel | Prod. no. 1002845 |
|-----------------------------------------|-------------------|


* with feed capacity





EUTRAC®

3-phase recessed track with matching accessories


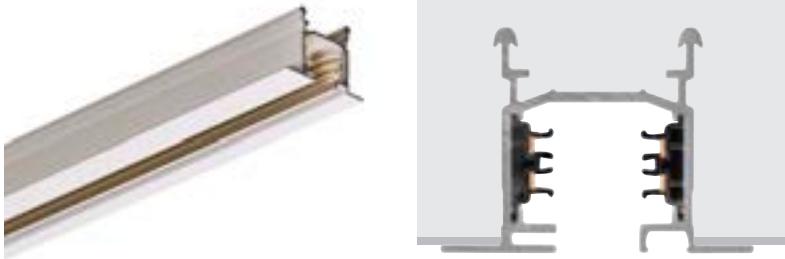


	2 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16
Colour	<input type="radio"/> white	<input type="radio"/> white
Material	Aluminium / plastic	Aluminium / plastic
L x W x H (cm)	200 x 5.9 x 4.1	300 x 5.9 x 4.1
Prod. no.	1001531	1001532

Feed-in, earth left 16 A max. Plastic / Steel L: 12.2 cm W: 6 cm H: 3.4 cm  <input type="radio"/> white Prod. no. 1001533	End cap plastic L: 2.7 cm W: 6 cm H: 3.2 cm  <input type="radio"/> white Prod. no. 1001538
Feed-in, earth right 16 A max. Plastic / Steel L: 12.2 cm W: 6 cm H: 3.4 cm  <input type="radio"/> white Prod. no. 1001534	Longitudinal connector with stabiliser 16 A max. Plastic / Steel L: 6.2 cm W: 2.5 cm H: 2.7 cm  <input type="radio"/> white Prod. no. 1001539
L-connector, external earth, with feed capacity 16 A max. Plastic / Steel L: 16 cm W: 16 cm H: 3.2 cm  <input type="radio"/> white Prod. no. 1001536	Mounting spring clip (6 pieces) Steel L: 2 cm W: 1 cm H: 2.5 cm  <input checked="" type="radio"/> grey Prod. no. 145551
L-connector, internal earth, with feed capacity 16 A max. Plastic / Steel L: 16 cm W: 16 cm H: 3.2 cm  <input type="radio"/> white Prod. no. 1001537	3-phase light adapter plastic L: 9.6 cm W: 3.5 cm H: 4.5 cm max. mechanical load: 5 kg  <input type="radio"/> white Prod. no. 1001542

1007655 **543**





TS V
3-phase

220-240V ~50/60Hz | 250/350/500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)



Down 1800lm | 2700K
 1980lm | 3000K
 1920lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007655
<input type="radio"/> white	1007654

TS V
3-phase

220-240V ~50/60Hz | 600/750/mA
Total wattage: 35W
Material: aluminium/polycarbonate (PC)



Down 3090lm | 2700K
 3470lm | 3000K
 3300lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007657
<input type="radio"/> white	1007656

1007646 545









NOBLO® SPOT
3-phase, PHASE



NOBLO® SPOT
3-phase, PHASE



220-240V ~50/60Hz | 150mA
Total wattage: 6.2W
Material: aluminium/polycarbonate (PC)



220-240V ~50/60Hz | 150mA
Total wattage: 6.2W
Material: aluminium/polycarbonate (PC)



CRI
90

Down

740lm | 2700K



CRI
90

Down

750lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007644
<input type="radio"/> white	1007645

Options	Prod. no.
<input checked="" type="radio"/> black	1007646
<input type="radio"/> white	1007647

1007649 547









NOBLO® SPOT 3-phase, PHASE



NOBLO® SPOT 3-phase, PHASE



220-240V ~50/60Hz | 150mA
Total wattage: 6.2W
Material: aluminium/polycarbonate (PC)



220-240V ~50/60Hz | 350mA
Total wattage: 8.4W
Material: aluminium/polycarbonate (PC)



Down

760lm | 4000K



Down


30lm | 2000K

- 450lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007648
<input type="radio"/> white	1007649


Options	Prod. no.
<input checked="" type="radio"/> black	1007355
<input type="radio"/> white	1007356

1007597 549

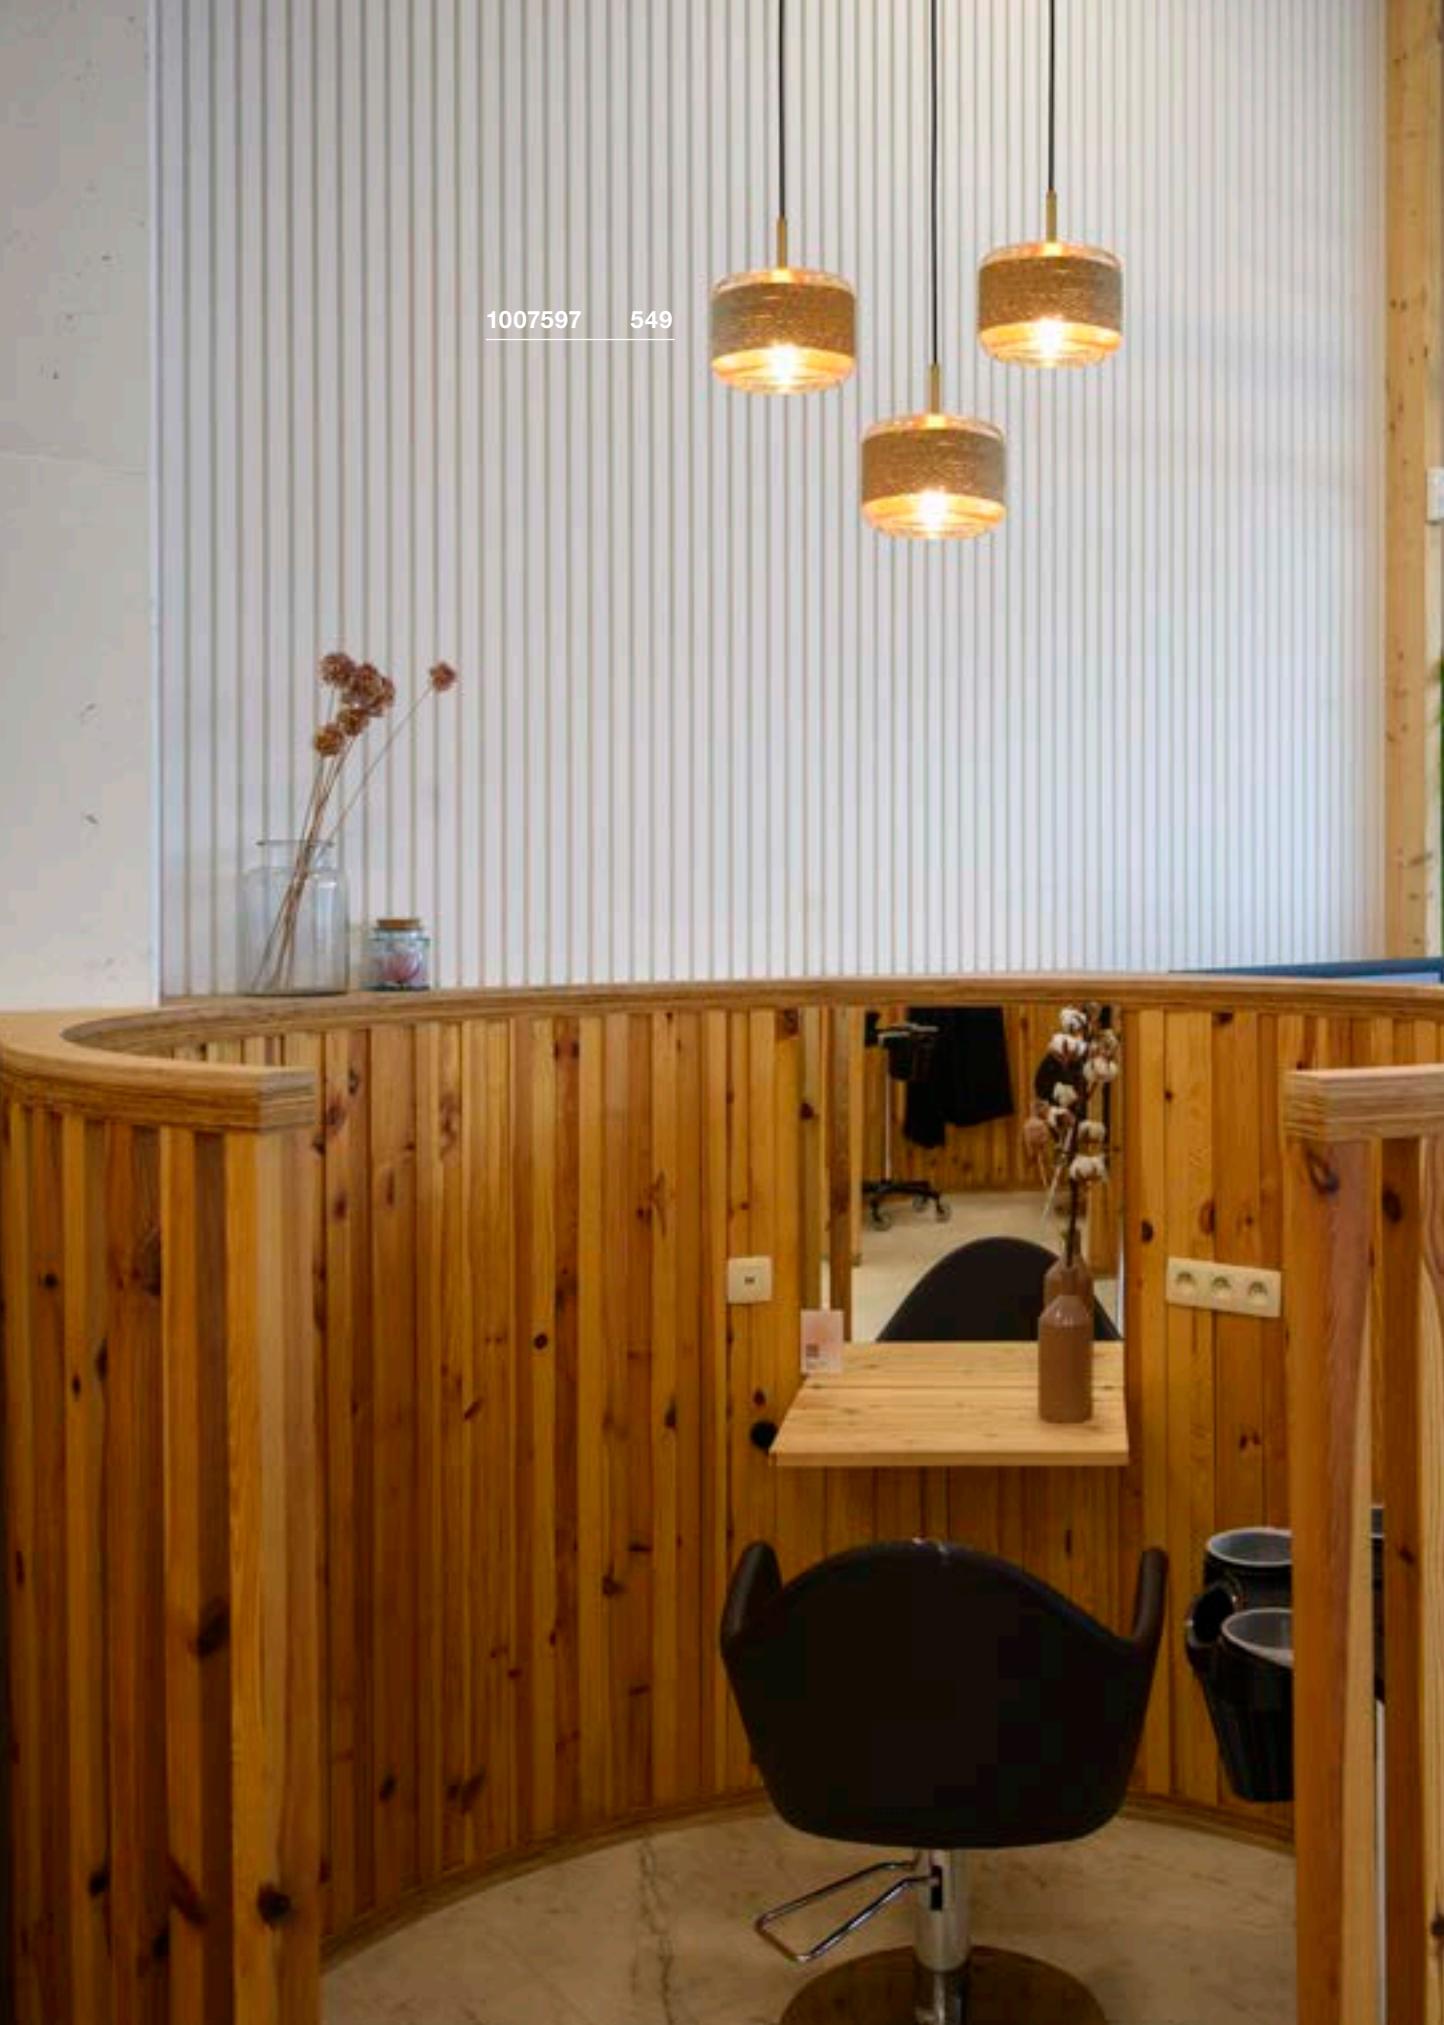



PANTILLO ROPE 19 PD, E27



200-240V ~50/60Hz
Material: glass/steel/hemp

- Open cable end



Base: 1xE27 Max. diameter: 10 cm L: 11 cm

Options	Prod. no.
● amber/gold	1007597
● anthracite/silver	1007596



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h



Prod. no.: 1005305

SIGHT TRACK

3-phase, DALI





SIGHT TRACK


3-phase



1005400 550



220-240V ~50/60Hz | 700mA
Total wattage: 39W
Material: aluminium/acrylic



220-240V ~50/60Hz | 700mA
Total wattage: 37W
Material: aluminium/acrylic



Down 3000lm | 3000K 3000lm | 4000K



Down 3000lm | 3000K 3000lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> black	1005397
<input type="radio"/> white	1005399

Options	Prod. no.
<input checked="" type="radio"/> black	1005400
<input type="radio"/> white	1005401
<input type="radio"/> grey	1005402





1005399 551




SIGHT MOVE 3-phase, DALI



DALI



SIGHT MOVE 3-phase




220-240V ~50/60Hz | 350mA

Total wattage: 26W

Material: aluminium/
polymethylacrylate (PMMA)CRI
90

Down

2700lm | 3000K
3100lm | 4000K

220-240V ~50/60Hz | 350mA

Total wattage: 26W

Material: aluminium/
polymethylacrylate (PMMA)CRI
90



Down

2700lm | 3000K
3100lm | 4000K

Options	Prod. no.
● black 2700lm 3000K	1004690
○ white 2700lm 3000K	1004691
● black 3100lm 4000K	1004692
○ white 3100lm 4000K	1004693

Options	Prod. no.
● black 2700lm 3000K	1004686
○ white 2700lm 3000K	1004687
● black 3100lm 4000K	1004688
○ white 3100lm 4000K	1004689

PARA CONE GL
3-phase, GU10



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1006157
<input type="radio"/> white	1006158





LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G



Prod. no.: **1006321**

PARA CONE GL
PD, GU10



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	1006159
<input type="radio"/> white	1006160




LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G



Prod. no.: **1006321**

1006157 **552**

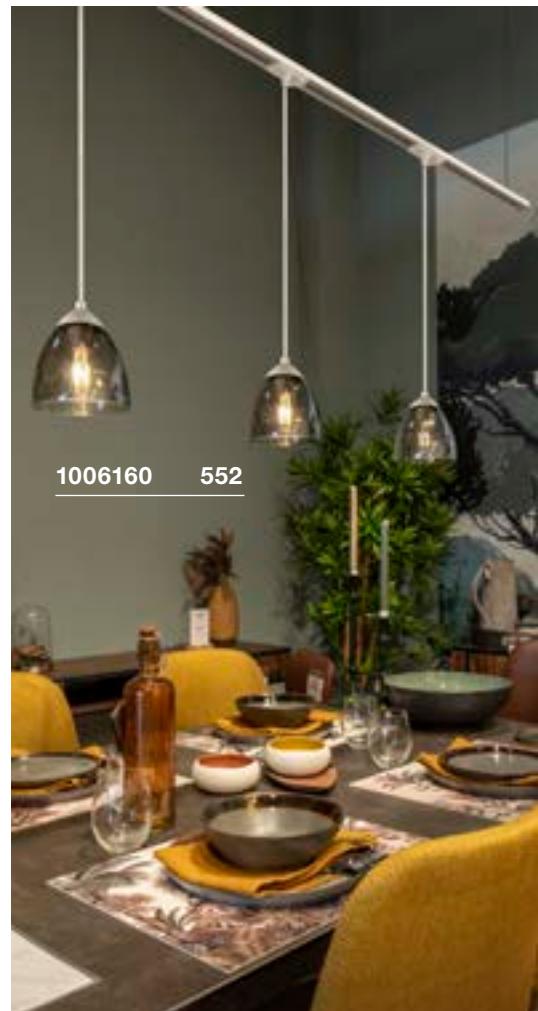



PARA CONE 14
3-phase, QPAR51



PARA CONE 14
3-phase, PD, QPAR51



153141 553

**SOCKET
INSIDE** <25 W

Base: 1xGU10

Options	Prod. no.
● black	1002876
○ white	1002877
● copper	1002878



LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G

Prod. no.: **1006321**



**SOCKET
INSIDE** <35 W

Base: 1xGU10

Options	Prod. no.
● black	153140
○ white	153141
● copper	1002686





LED GU10 51mm | 3.2W
2700K | 270lm | EEK=G

Prod. no.: **1006321**



FORCHINI M 40 TRACK
3-phase, PD, E27



220-240V ~50/60Hz
Material: aluminium/steel

SOCKET INSIDE <40 W

Base: 1xE27 Max. diameter: 6.8 cm L: 15.2 cm

Options Prod. no.
 black/gold 153130



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h



Prod. no.: 1005305

153130 554











EURO CUBE 3-phase



EURO SPOT TRACK 3-phase, QPAR111



EURO SPOT TRACK 3-phase, QPAR51



220-240V ~50/60Hz
Total wattage: 26W
Material: aluminium

220-240V ~50/60Hz
Material: aluminium

220-240V ~50/60Hz
Material: aluminium



Down 2470lm | 3000K
2740lm | 4000K



Base: 1xGU10



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black 2470lm 3000K	152750
<input type="radio"/> white 2470lm 3000K	152751
<input checked="" type="radio"/> black 2740lm 4000K	152780
<input type="radio"/> white 2740lm 4000K	152781

Options	Prod. no.
<input checked="" type="radio"/> black	153420
<input type="radio"/> white	153421

Options	Prod. no.
<input checked="" type="radio"/> black	153850
<input type="radio"/> white	153851



QPAR111 | 12.5W | 30°
2700K | 950lm | EEEK=F
13kWh/1000h

Prod. no.: **1005276**





LED GU10 51mm | 6W | 38°
2700K | 450lm | EEEK=F
6kWh/1000h

Prod. no.: **1005077**



ALTRA DICE TRACK
3-phase, QPAR51



220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <50 W

Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
<input checked="" type="radio"/> black	152320
<input type="radio"/> white	152321

LED GU10 51mm | 6W | 36° | 2200-2700K | 360lm | EEK=G | 6KWh/1000h | C,L
Prod. no.: 1005273

152320 556





153560 557

MENSEN DIE ZICH ELKE DAG KUNNEN GEVEN.
 ZIJ ZIJN DE MENSEN DIE IK BEWONDER.
 ZE ZIJN ECHTE MENSEN.

Alfonso Perea White




Success is geboren uit arrogantie,
 maar grootheid komt uit zederigheid.



PURI TRACK 3-phase, QPAR51



PURI TRACK GLASS 3-phase, QPAR51



220-240V ~50/60Hz
 Material: aluminium/polycarbonate (PC)

- Decorative ring included



Base: 1xGU10

Options	Prod. no.
● black	153560
○ white	153561
● grey	153564



LED GU10 51mm | 6W | 38°
 2700K | 450lm | EEK=F
 6kWh/1000h

Prod. no.: **1005075**

Base: 1xGU10

Options	Prod. no.
● black	1001871
○ white	1001872






LED GU10 51mm | 6W | 38°
 2700K | 450lm | EEK=F
 6kWh/1000h

Prod. no.: **1005077**


KALU TRACK LED
3-phase, PHASE



KALU TRACK
3-phase, QPAR111



220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium



220-240V ~50/60Hz
Material: aluminium/plastic



Down 970lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	
CRI80	152600
<input type="radio"/> white	
CRI90	152601




Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> black	152610
<input type="radio"/> white	152611



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: **1005278**

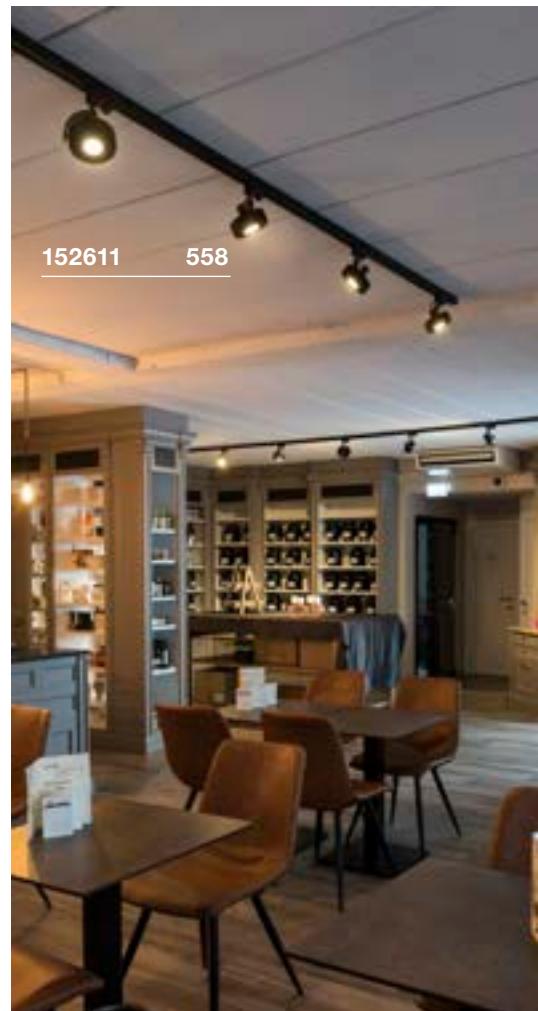




152611 558




BIMA
3-phase, single, QPAR51




BIMA
3-phase, double, QPAR51



220-240V ~50/60Hz
Material: aluminium



220-240V ~50/60Hz
Material: aluminium

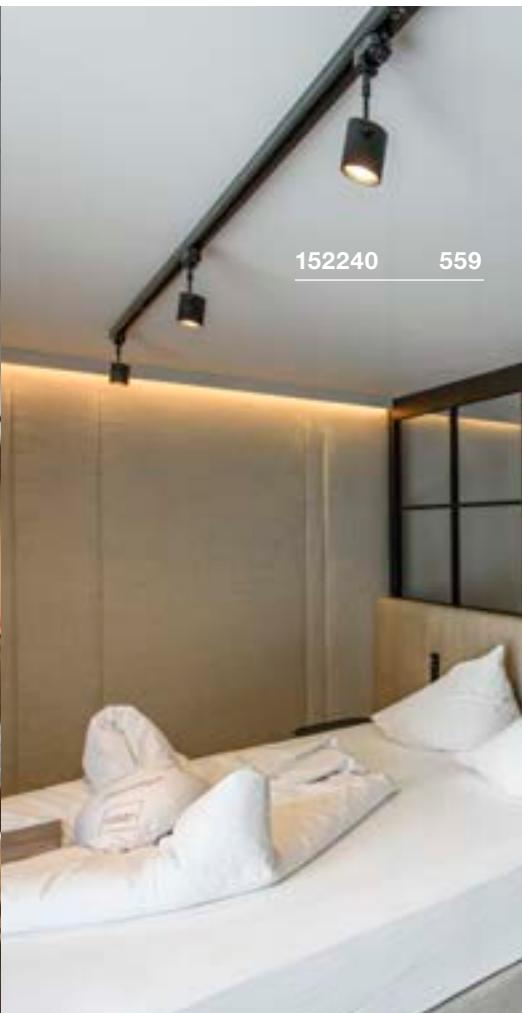

Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● black	152240
○ white	152241
● grey	152242



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● black	152230
○ white	152231
● grey	152232



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075






152960 561



152430 561

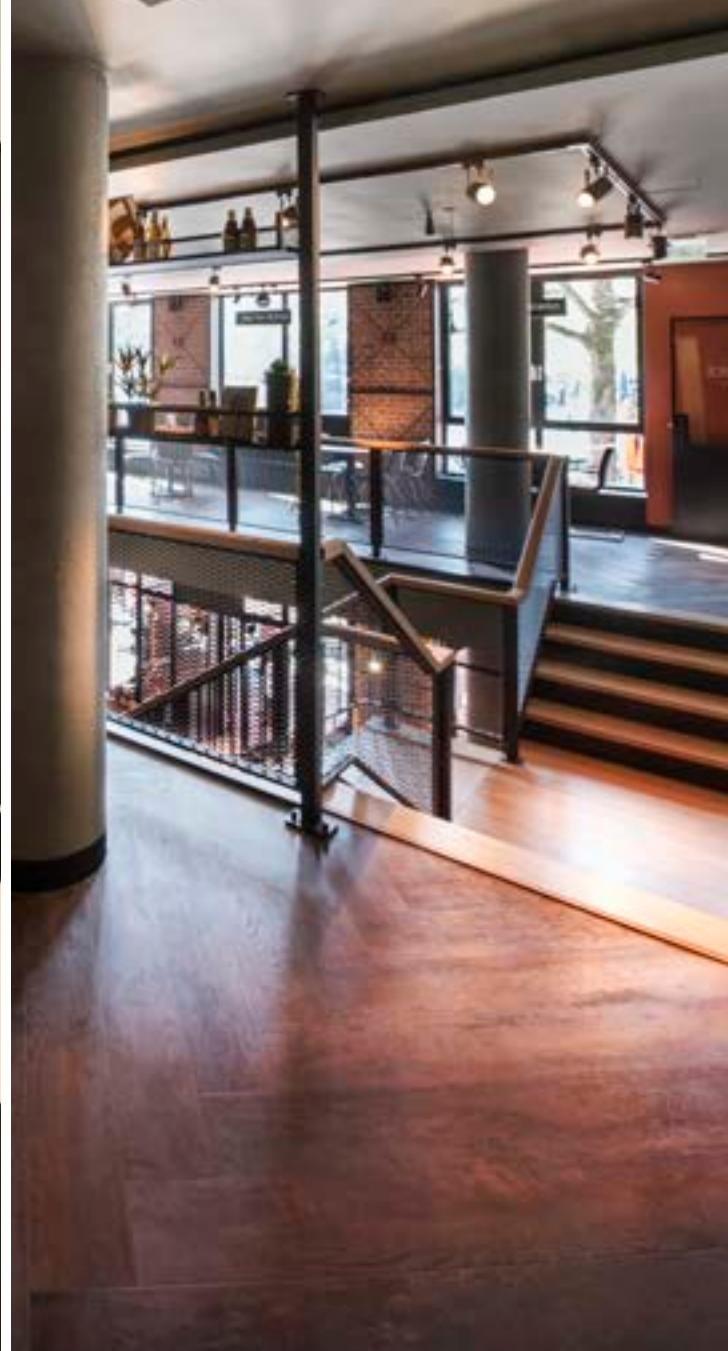







HELIA 50 TRACK 3-phase



ENOLA C TRACK 3-phase




AVO TRACK 3-phase, QPAR51



220-240V ~50/60Hz | 500mA

Total wattage: 11W


Material: aluminium



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium



220-240V ~50/60Hz

Material: steel



Down

810lm | 3000K
880lm

Down

1040lm | 3000K



Base: 1xGU10

Max. diameter: 5.1 cm

Options	Prod. no.
<input checked="" type="radio"/> black 810lm	152960
<input type="radio"/> white 880lm	152961

Options	Prod. no.
<input checked="" type="radio"/> black 152430	
<input type="radio"/> white 152431	

Options	Prod. no.
<input checked="" type="radio"/> black 152640	
<input type="radio"/> white 152641	

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000hProd. no.: **1005077**

DESIGN YOUR HIGH-VOLTAGE TRACK SYSTEM

Professionally managed: well-designed lighting is essential, especially where there's plenty to see. Due to the versatility of track lighting, it's possible to showcase specific objects in the perfect light. Changes to the lighting design can also be made at any time. 3-phase high-voltage busbars are perfect for shops and exhibition stands. They create the perfect illumination and present products and exhibition items in just the right light. 1-phase high-voltage busbars are particularly suitable for private homes and bathe your living space in atmospheric light. Thanks to the boreholes present in their cross-section, these aluminium tracks can be attached to your ceiling quickly and easily. You can choose from a recessed version and a surface-mounted version, and both are available in multiple colours.

CHOOSE YOUR PREFERRED ...

- ① Track (S-TRACK, EUTRAC, 1-phase system)
- ② Assembly type (recessed/mounting track)
- ③ Lights
- ④ Design options




DONE!

TRACK SYSTEMS

S-TRACK
3-phase system



EUTRAC
3-phase system



1-PHASE SYSTEM



Recessed track



Mounting track



Ceiling




Wall



Pendant

Mounting options

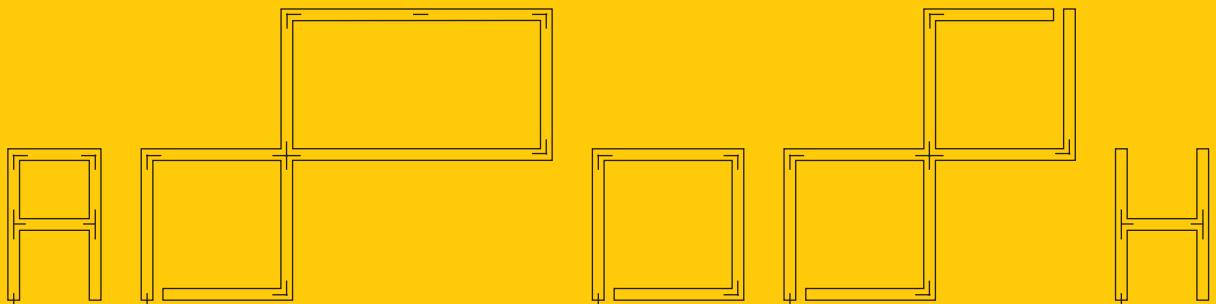

Various design options tailored to your room

Use our track configurator at slv.com



PROFILES

GRAZIA 10
SURFACE-MOUNTED
PROFILE | 567GRAZIA 10
RECESSED PROFILE
| 567

GRAZIA 10 EDGE | 570

GRAZIA 20
SURFACE-MOUNTED
PROFILE | 573GRAZIA 20
RECESSED PROFILE
| 573GRAZIA 60
SURFACE-MOUNTED
PROFILE | 577GRAZIA 60
RECESSED PROFILE
| 577GRAZIA 10
ACCESSORIES | 569GRAZIA 10 EDGE
ACCESSORIES | 571GRAZIA 20
ACCESSORIES |
574–575GRAZIA 60
ACCESSORIES |
578–579

LED STRIPS


GRAZIA
FLEXSTRIP LED | 582GRAZIA PRO
FLEXSTRIP LED | 583GRAZIA PRO MAX
FLEXSTRIP | 585GRAZIA PRO
FLEXSTRIP
TUNABLE WHITE | 587GRAZIA PRO
FLEXSTRIP
RGBW | 589GRAZIA IP
FLEXSTRIP | 591GRAZIA
FLEXSTRIP LED
ACCESSORIES | 582GRAZIA PRO
FLEXSTRIP LED
ACCESSORIES | 583GRAZIA PRO MAX
FLEXSTRIP
ACCESSORIES | 585GRAZIA PRO
FLEXSTRIP
TUNABLE WHITE
ACCESSORIES | 587GRAZIA PRO FLEX-
STRIP RGBW ACCE-
SORIES | 589



GRAZIA 10

Surface-mounted profile, flat 2m

Material: aluminium,
Width: 1.75 cm, Height: 1.1 cm,
Max. LED strip width in mm: 10
Cover not included




IP 20

Length (cm)	Colour	Material	Prod. no.
200	<input checked="" type="radio"/> black <input type="radio"/> white	aluminium	1000462
			1000461

GRAZIA 10

Surface-mounted profile, standard

Material: aluminium
Width: 1.75 cm, Height: 1.62 cm
Max. LED strip width in mm: 10
Cover not included




IP 20

Length (cm)	Colour	Material	Prod. no.
200	<input checked="" type="radio"/> black <input type="radio"/> white	aluminium	1000465
			1000464

GRAZIA 10

Recessed profile

Material: aluminium
Width: 3 cm, Height: 1.62 cm
Max. LED strip width in mm: 10
Cover not included



IP 20

Length (cm)	Colour	Material	Prod. no.
200	<input checked="" type="radio"/> black <input type="radio"/> white	aluminium	1000459
			1000458



ACCESSORIES

GRAZIA 10 Cover



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Cover	<input type="radio"/> frosted	200	1,58	0,4	Polycarbonate (PC)	1000466
	<input type="radio"/> opaque				Polymethylacrylate (PMMA)	1000468
	<input type="radio"/> satin finish					1000469

GRAZIA 10 Mounting clips



Description	Colour	Width (cm)	Height (cm)	Depth (cm)	Material	Prod. no.
Mounting clips	<input type="radio"/> silver, 45°	1,62	1,62	1	Steel	1000489
	<input checked="" type="radio"/> stainless steel, not visible	1,53	0,3	1	Stainless steel	1000487

Packaging contents: 2 units

GRAZIA 10 End caps for surface-mounted profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End caps	<input checked="" type="radio"/> black, flat	–	1,75	1,1	aluminium	1000477
	<input type="radio"/> white, flat			1,1		1000476
End caps	<input checked="" type="radio"/> black, standard	–	1,75	1,62	aluminium	1000480
	<input type="radio"/> white, standard			1,62		1000479

Packaging contents: 2 units

GRAZIA 10 End caps for recessed profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End caps	<input checked="" type="radio"/> black	–	3	1,62	aluminium	1000474
	<input type="radio"/> white					1000473

Packaging contents: 2 units




GRAZIA 10 EDGE

2 m

Material: aluminium
Width: 1.95 cm, Height: 1.95 cm
Max. LED strip width in mm: 10
Cover not included



IP 20



Length (cm)	Colour	Material	Prod. no.
200	<input type="radio"/> white <input checked="" type="radio"/> aluminium	aluminium	1004890 1004889

ACCESSORIES

GRAZIA 10 EDGE Cover



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Cover	<input type="radio"/> frosted				Polycarbonate (PC)	1000466
	<input type="radio"/> opaque	200	1,58	0,4	Polymethylacrylate (PMMA)	1000468
	<input type="radio"/> satin finish					1000469

GRAZIA 10 EDGE End cap



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End cap	<input type="radio"/> white	2	0,7	2	ABS	1004894
	<input checked="" type="radio"/> aluminium					1004893

Packaging contents: 2 units

GRAZIA 10 EDGE Mounting clips





Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Mounting clips	<input checked="" type="radio"/> Stainless steel	2,25	15	2,25	Steel	1004895

Packaging contents: 4 units



GRAZIA 20Standard surface-mounted profile,
3 m

Material: aluminium
 Width: 3.5 cm, Height: 3.2 cm
 Max. LED strip width in mm: 20
 Cover not included

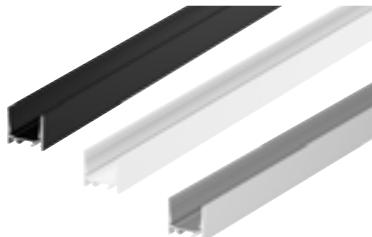

Length (cm)

Colour

Material

Prod. no.

300

- black
- white
- aluminium



aluminium

1000525
 1000524
 1000523

GRAZIA 20

Surface-mounted profile, flat, 3m

Material: aluminium
 Width: 3.5 cm, Height: 2.2 cm
 Max. LED strip width in mm: 20
 Cover not included



Length (cm)

Colour

Material

Prod. no.

300

- black
- white



aluminium

1000534
 1000533

GRAZIA 20

Recessed profile, 3m

Material: aluminium
 Width: 5.2 cm, Height: 3.2 cm
 Max. LED strip width in mm: 20
 Cover not included



Length (cm)

Colour

Material

Prod. no.

300

- black
- white

aluminium

1000498
 1000497

ACCESSORIES

GRAZIA 20
Cover, 3m, flat



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Cover	<input type="radio"/> frosted	300	3,2	0,6	Polycarbonate (PC)	1000540
	<input type="radio"/> frosted				Polymethylacrylate (PMMA)	1000546
	<input type="radio"/> opaque					1000549

GRAZIA 20
Longitudinal connector



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Longitudinal connector	<input checked="" type="radio"/> aluminium	3,8	1,4	0,4	aluminium	1000571

Packaging contents: 2 units

GRAZIA 20
End caps for surface-mounted profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End cap	<input checked="" type="radio"/> black, flat	–	3,5	2,2	aluminium	1000561
	<input type="radio"/> white, flat					1000560
End cap	<input checked="" type="radio"/> black, standard	–	3,5	3,2	aluminium	1000567
	<input type="radio"/> white, standard					1000566

Packaging contents: 2 units

GRAZIA 20
End cap for recessed profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End cap	<input checked="" type="radio"/> black <input type="radio"/> white	-	5,2	3,2	aluminium	1000558
						1000557

Packaging contents: 2 units

GRAZIA 20
Pendant suspension



Description	Colour	Length (cm)	Material	Prod. no.
Pendant suspension	<input type="radio"/> silver	200	Steel	1000535

Packaging contents: 2 units

GRAZIA 20
Mounting clips



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Mounting clip	<input type="radio"/> silver	2	3	0,8	Steel	1000536
Mounting clip	<input checked="" type="radio"/> chrome/aluminium	5,5	7	2,3	Steel/aluminium	1004932


Packaging contents: 2 units



GRAZIA 60

Surface-mounted profile

Material: aluminium
Width: 7 cm, Height: 9.5 cm
Max. LED strip width in mm: 20
Cover not included





Length (cm)	Colour	Material	Prod. no.
150	<input checked="" type="radio"/> black	aluminium	1004896
150	<input type="radio"/> white		1004897
300	<input checked="" type="radio"/> black	aluminium	1004898
300	<input type="radio"/> white		1004899

GRAZIA 60

Recessed profile, 1.5m

Material: aluminium
Width: 8.6 cm, Height: 3.3 cm
Max. LED strip width in mm: 20
Cover not included

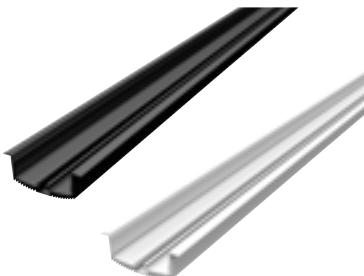

Length (cm)	Colour	Material	Prod. no.
150	<input checked="" type="radio"/> black	aluminium	1004905
150	<input type="radio"/> white		1004906
300	<input checked="" type="radio"/> black	aluminium	1004907
300	<input type="radio"/> white		1004908


ACCESSORIES

GRAZIA 60 Cover, 1.5m



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Cover, 1.5m	<input checked="" type="radio"/> black	150	6,5	0,65	aluminium	1004912
	<input type="radio"/> white					1004913
	<input type="radio"/> frosted				Polycarbonate (PC)	1004914
	<input type="radio"/> frosted				Polymethylacrylate (PMMA)	1004916
Cover, 3m	<input type="radio"/> frosted	300	6,5		Polycarbonate (PC)	1004915
	<input type="radio"/> frosted				Polymethylacrylate (PMMA)	1004917

GRAZIA 60 End caps



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
End caps for surface-mounted profile	<input checked="" type="radio"/> black	–	7	9,5	aluminium	1004900
	<input type="radio"/> white					1004901
End caps for recessed profile	<input checked="" type="radio"/> black	–	8,6	3,3	aluminium	1004909
	<input type="radio"/> white					1004910

Packaging contents: 2 units

GRAZIA 60 Surface-mounted profile, mounting profile



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Mounting profile	<input checked="" type="radio"/> black	150	6,1	1,2	aluminium	1004902

GRAZIA 60
Surface-mounted profile,
longitudinal connector



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Longitudinal connector	● aluminium	8	4,2	1	aluminium	1004903

Packaging contents: 2 units

GRAZIA 60
Surface-mounted profile, feed-in



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Feed-in	● aluminium	8	4,2	2,4	aluminium	1004904

GRAZIA 60
Recessed profile, mounting clip



Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Mounting clip	● chrome	13	2,8	4	aluminium	1004911

Packaging contents: 2 units

CONTROLLER
LED Strip CCT / RGBW




Description	Colour	Length (cm)	Width (cm)	Height (cm)	Material	Prod. no.
Controller	○ white	14,5	4,65	1,6	Polycarbonate (PC)	1006348

DESIGN YOUR LED PROFILE

Create accents or illuminate entire rooms – available with up to 700 lm per 5 m.


Bring colour into play – LED strips available in white, as CCT (Tunable White) or RGBW version.

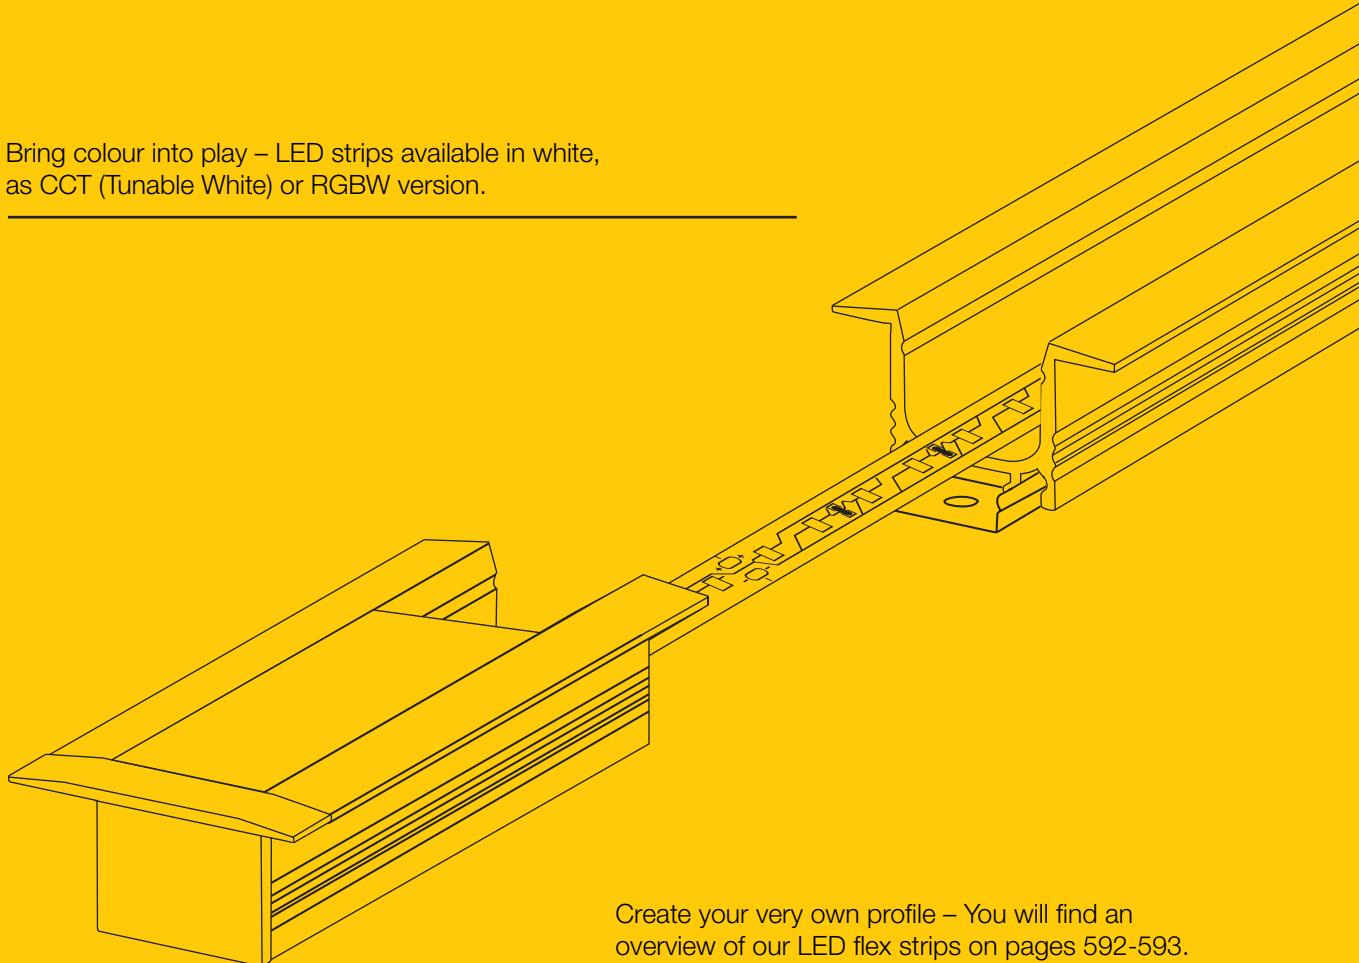

Create your very own profile – You will find an overview of our LED flex strips on pages 592-593. Matching drivers are presented on our Accessories pages 866-881.



We recommend a new feed-in for double-sided lengths over 3 m and from 5 m

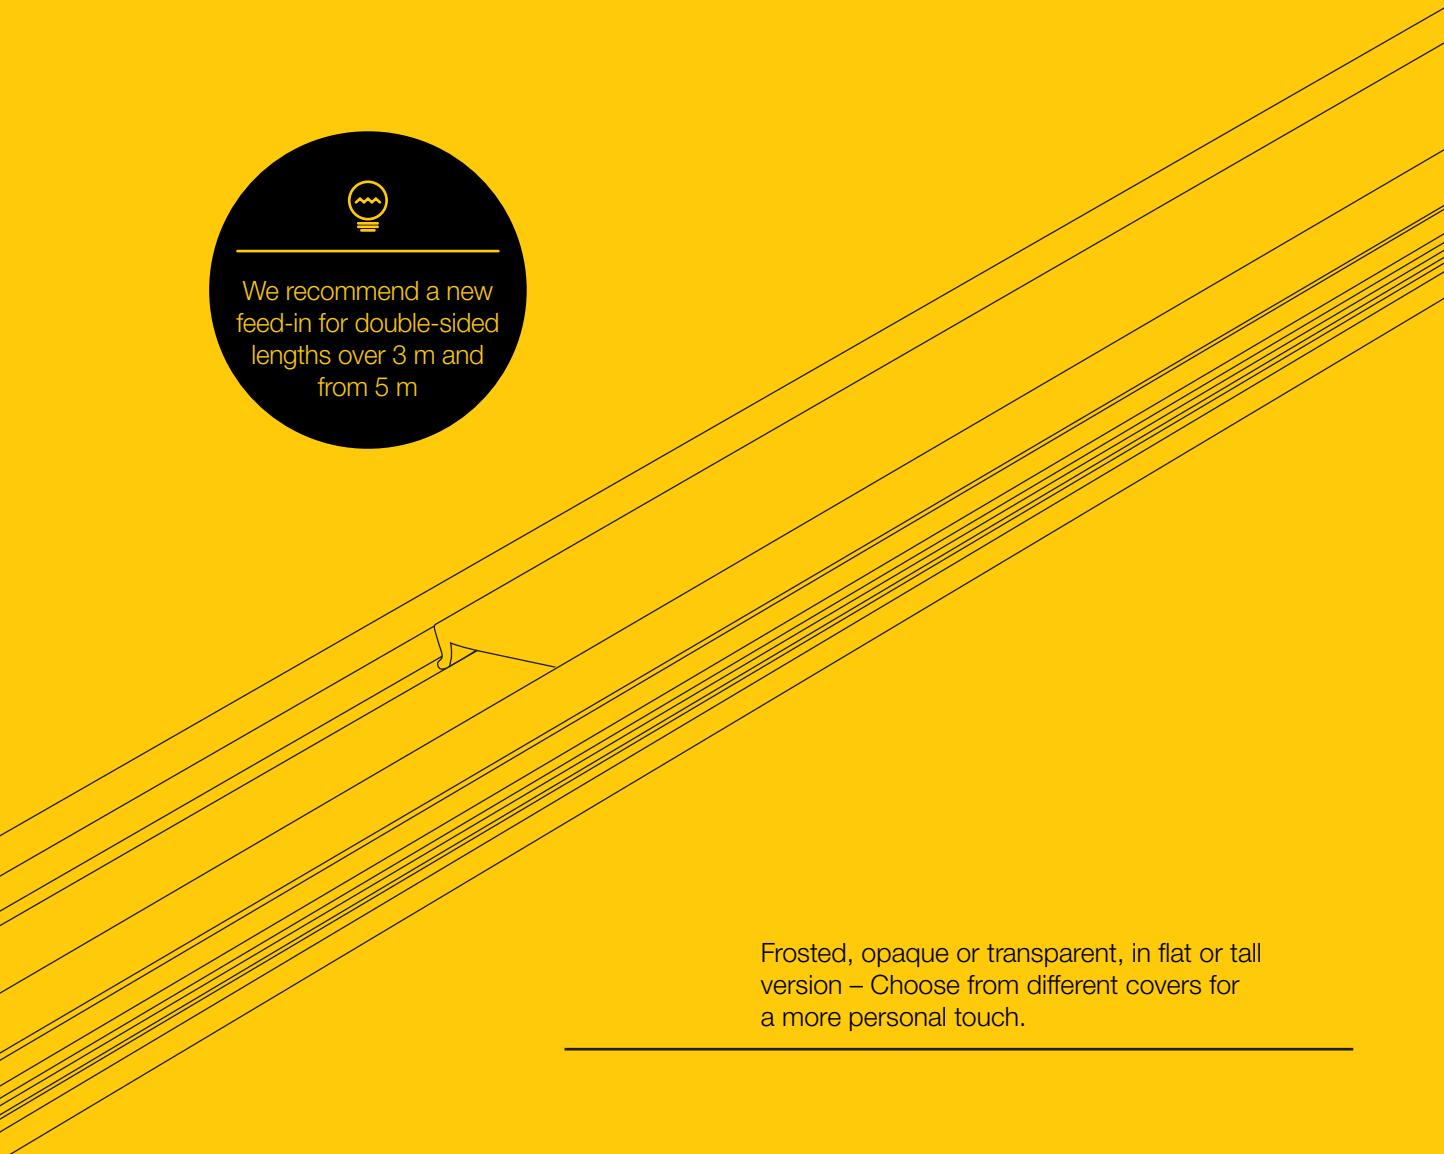

Frosted, opaque or transparent, in flat or tall version – Choose from different covers for a more personal touch.

For indoors, outdoors and wet rooms.
With IP20 and IP54, equipped for all applications.

Whether a standard or flat surface-mounted profile, recessed profile or corner profile: we've got the right profile for your project.

With lengths from 5 m to 80 m, there are no limits – increase or shorten as desired. Thanks to 24V technology, you can create long lengths with fewer feed-in points.



GRAZIA FLEXSTRIP LED 24V

LEDs per metre: 70
 Width: 1 cm
 Height: 0.12 cm
 LED gap: 1.4 cm
 Can be separated every: 10 cm
 IP code: IP 20
 Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
2700	3500	44				1004708
3000	3500	44	90	3	500	1004709
4000	3750	44				1004710



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
<input type="radio"/> LED power supply 50W, triac dim		18.4	6.1	3.2	1003104
<input type="radio"/> LED power supply 25W, triac dim		12.8	5.2	3	1006336
<input type="radio"/> LED power supply 30W, Slim Line, on/off	Polycarbonate (PC)	30		1.6	1007250
<input type="radio"/> LED power supply 30W, Slim Line, DALI			3		1007254
<input type="radio"/> LED power supply 100W, Slim Line, on/off		35		1.8	1007251
<input type="radio"/> LED power supply 100W, Slim Line, DALI					1007255



GRAZIA PRO FLEXSTRIP 24V

LEDs per metre: 126

Width: 1 cm

Height: 0.12 cm

LED gap: 0.8 cm

Can be separated every 5.6 cm

IP code: IP 20

Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
2700	6500	73				1004712
3000	6500	73	90	3	500	1004713
4000	7000	73				1004714



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
<input type="radio"/> LED power supply 50W, triac dim		18.4	6.1	3.2	1003104
<input type="radio"/> LED power supply 25W, triac dim		12.8	5.2	3	1006336
<input type="radio"/> LED power supply 30W, Slim Line, on/off		30		1.6	1007250
<input type="radio"/> LED power supply 30W, Slim Line, DALI	Polycarbonate (PC)	30		3	1007254
<input type="radio"/> LED power supply 100W, Slim Line, on/off		35		1.8	1007251
<input type="radio"/> LED power supply 100W, Slim Line, DALI					1007255

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.

From a length of 5 m, a new feed-in must be provided.



GRAZIA PRO FLEXSTRIP 24V


LEDs per metre: 168
 Width: 1 cm
 Height: 0.12 cm
 LED gap: 0.6 cm
 Can be separated every 4.2 cm
 IP code: IP 20
 Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
2700	8500	91				1004716
3000	8500	91	90	3	500	1004717
4000	9100	91				1004718
6500	9100	91				1004719



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
<input type="radio"/> LED power supply 50W, triac dim		18.4	6.1	3.2	1003104
<input type="radio"/> LED power supply 25W, triac dim		12.8	5.2	3	1006336
<input type="radio"/> LED power supply 30W, Slim Line, on/off	Polycarbonate (PC)	30		1.6	1007250
<input type="radio"/> LED power supply 30W, Slim Line, DALI			3		1007254
<input type="radio"/> LED power supply 100W, Slim Line, on/off		35		1.8	1007251
<input type="radio"/> LED power supply 100W, Slim Line, DALI					1007255

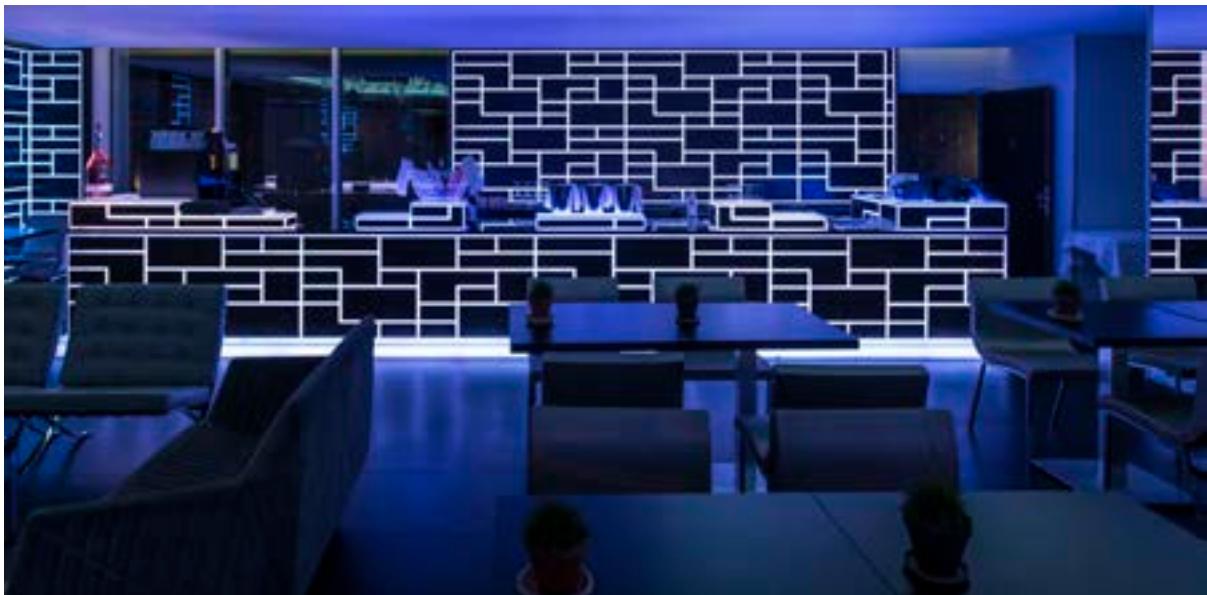

GRAZIA PRO MAX FLEXSTRIP 24V

LEDs per metre: 196

Width: 2 cm

Height: 0.15 cm

LED gap: 0.5 cm

Can be separated every 3.6 cm

IP code: IP 20

Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
3000	12500	126	90	3	500	1004720
4000	13000	126				1004721



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
<input type="radio"/> LED power supply 150W, Slim Line, on/off	Polycarbonate (PC)	35	3	1.8	1007252
<input type="radio"/> LED power supply 150W, Slim Line, DALI					1007256

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.

From a length of 5 m, a new feed-in must be provided.



GRAZIA PRO MAX FLEXSTRIP 24V

LEDs per metre: 196

Width: 2 cm

Height: 0.15 cm

LED gap: 1 cm

Can be separated every 7.1 cm

IP code: IP 20

Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
3000	20000	193	90	3	500	1004722
4000	21400					1004723



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
<input type="radio"/> LED power supply 250W, Slim Line, on/off	Polycarbonate (PC)	40	4	2.2	1007253
<input type="radio"/> LED power supply 250W, Slim Line, DALI					1007257



GRAZIA PRO FLEXSTRIP tunable white, 24V

LEDs per metre: 224

Width: 1 cm

Height: 0.12 cm

LED gap: 0.9 cm

Can be separated every 6.3 cm

IP code: IP 20

Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.	
2700-6500	3400-3700	40	90	6	500	1004725	



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	
<input type="radio"/> DALI Controller 1 channel, push-dim		11.6	4.2	1.8	1003106	
<input type="radio"/> LED power supply 60W, DALI, 2 channel		20.2	5.8	3	1006133	
<input type="radio"/> SMART Controller 1-5 channel, selectable via DIP	Polycarbonate (PC)	14.5	4.65	1.6	1006348	
<input type="radio"/> LED power supply 100W, Slim Line, on/off		35	3	1.8	1007251	
<input type="radio"/> LED power supply 100W, Slim Line, DALI					1007255	

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.

From a length of 5 m, a new feed-in must be provided.



GRAZIA PRO FLEXSTRIP RGBW, 24V

LEDs per metre: 70

Width: 1.2 cm

Height: 0.22 cm

LED gap: 1.4 cm

Can be separated every: 10 cm

IP code: IP 20

Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.	
RGB W 3000	2500 2050	60 27	90	6	500	1004727	



Options	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	
<input type="radio"/> SMART Controller 1-5 channel, selectable via DIP	Polycarbonate (PC)	14.5	4.65	1.6	1006348	
<input type="radio"/> LED power supply 100W, Slim Line, on/off		35	3	1.8	1007251	


To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.

In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.

From a length of 5 m, a new feed-in must be provided.



ENJOY
YOUR
TRAINING
LIKE
A
PARTY

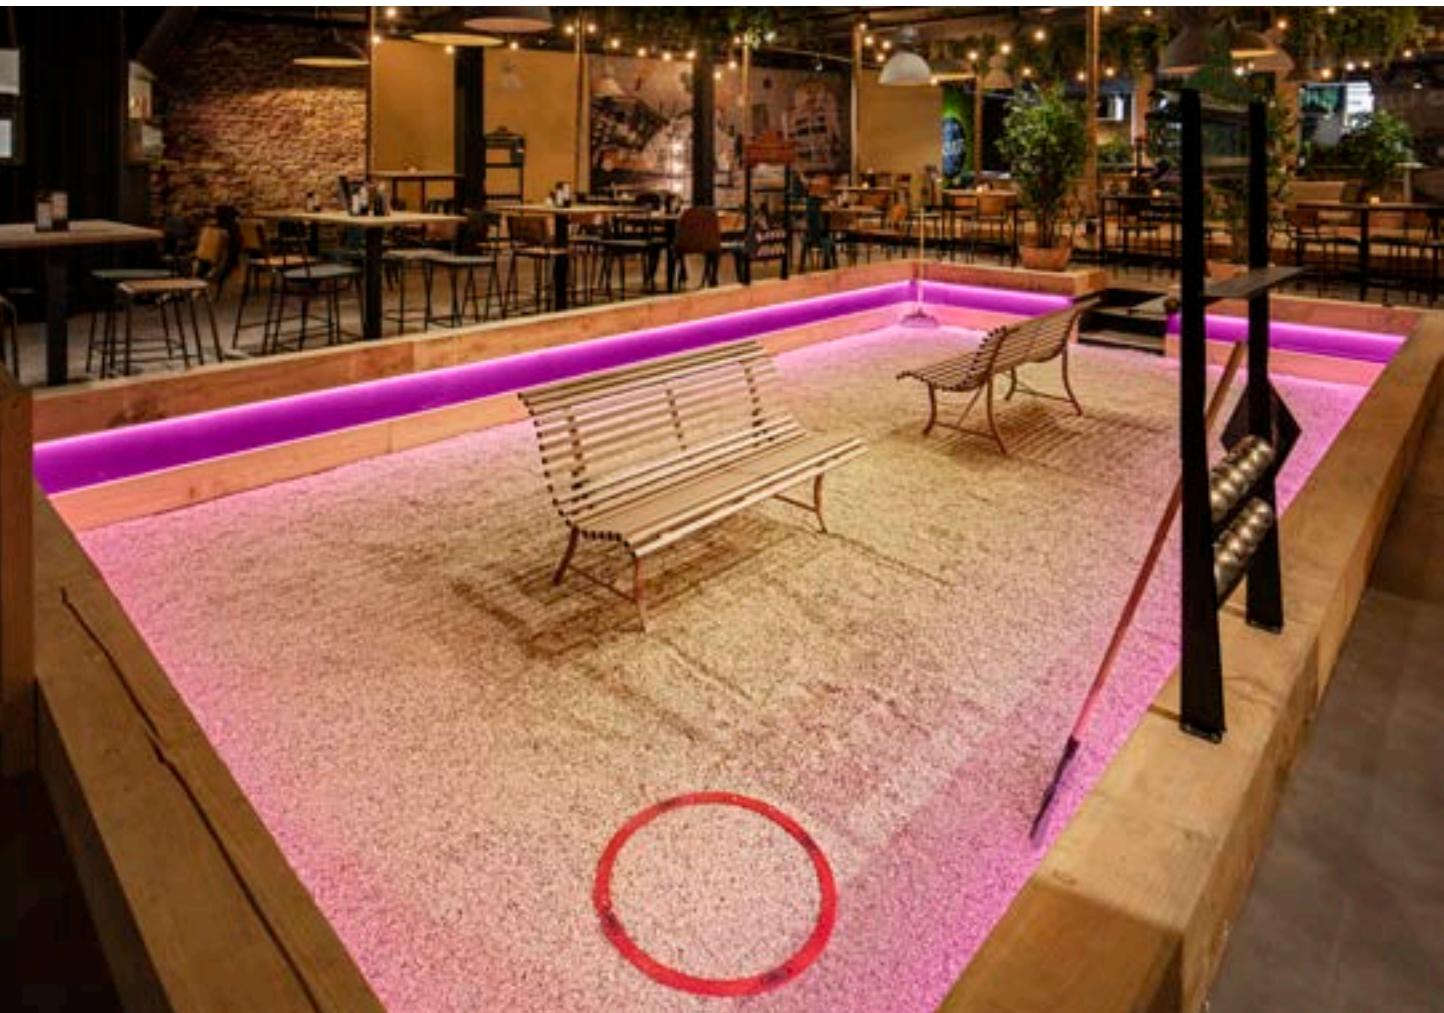

GRAZIA IP FLEXSTRIP 24V

LEDs per metre: 70
 Width: 1.2 cm
 Height: 0.4 cm
 LED gap: 1.4 cm
 Can be separated every: 10 cm
 IP code: IP 54
 Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
2700	3350					1004734
3000	3350	44	90	4	502	1004735
4000	3600					1004736

GRAZIA IP FLEXSTRIP tunable white, 24V

LEDs per metre: 224
 Width: 1.2 cm
 Height: 0.4 cm
 LED gap: 0.9 cm
 Can be separated every 6.3 cm
 IP code: IP 54
 Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
2700-6500	3210-3500	40	90	4	502	1004726

Incl. 2 end caps and fittings

GRAZIA IP FLEXSTRIP RGBW, 24V

LEDs per metre: 70
 Width: 1.4 cm
 Height: 0.46 cm
 LED gap: 1.4 cm
 Can be separated every: 10 cm
 IP code: IP 54
 Feed-in cable on both sides



Colour temperature (K)	Luminous flux (lm)	Output (W)	Colour rendering index (CRI)	Colour consistency (SDCM)	Length (cm)	Prod. no.
RGB W 3000	2350 1958	60 27	90	6	502	1004737

To ensure heat dissipation, the LED strips must be glued into an aluminium profile. Reverse of the LED strip with adhesive tape.
 In order to obtain a consistent light output from a length of 3 m, we recommend feeding the strips on both sides.
 From a length of 5 m, a new feed-in must be provided.

FLEXSTRIPS

OVERVIEW

GRAZIA LED

1004708
1004709
1004710

70 LEDs/m

GRAZIA PRO

1004712
1004713
1004714

126 LEDs/m

GRAZIA PRO

1004716
1004717
1004718
1004719

168 LEDs/m

GRAZIA PRO MAX


1004720
1004721

196 LEDs/m

GRAZIA PRO MAX

1004722
1004723

196 LEDs/m

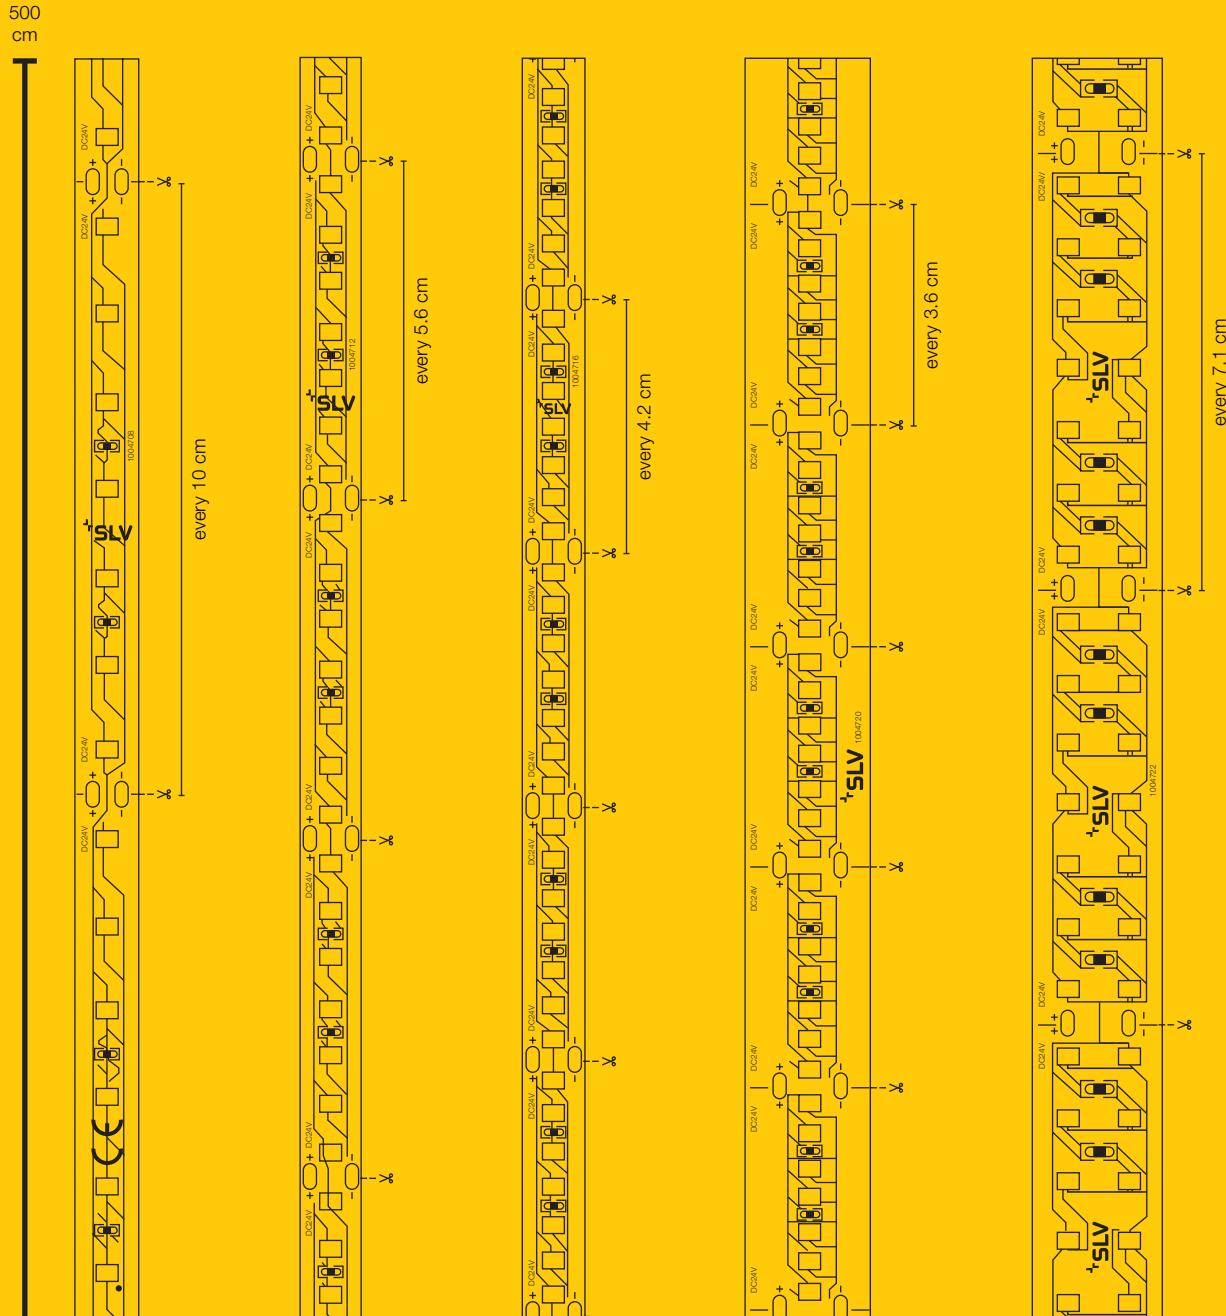




All flex strips
can be fed from
both sides



**GRAZIA
PRO MAX
TUNABLE WHITE**
1004725

224 LEDs/m

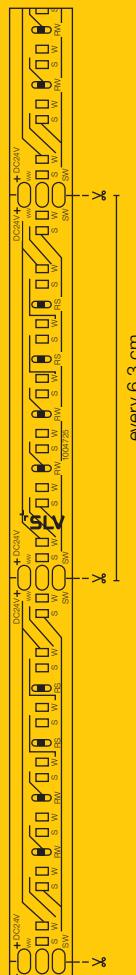


**GRAZIA
PRO MAX
RGBW**
1004727

70 LEDs/m




**GRAZIA
IP**
1004734
1004735
1004736

70 LEDs/m

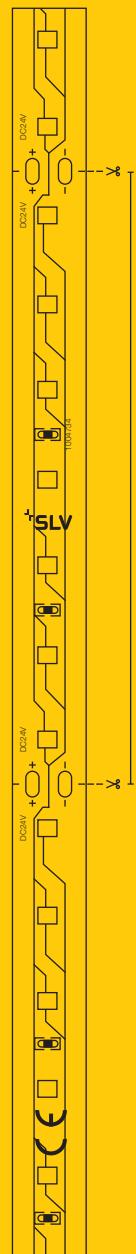


**GRAZIA
IP
TUNABLE WHITE**
1004726

224 LEDs/m

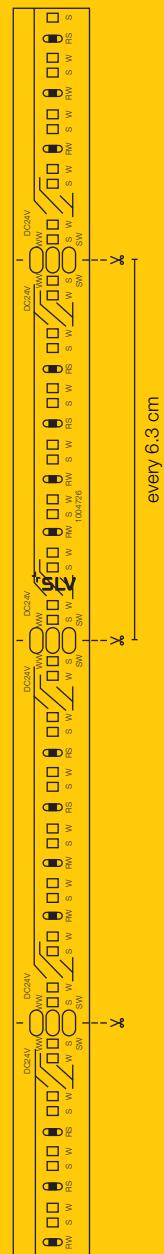

**GRAZIA
IP
RGBW**
1004737

70 LEDs/m

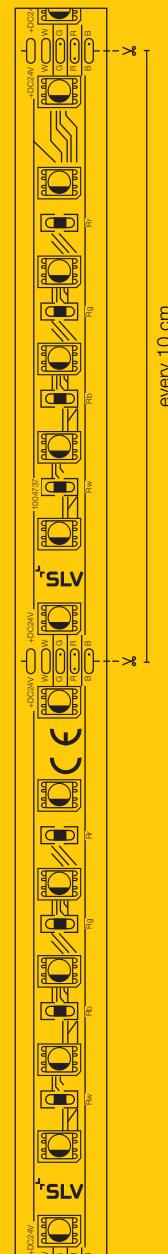






SOCKET ARROCK SLOT 649	LED L-LINE OUT 30 650	LED L-LINE OUT 60 651	LED L-LINE OUT 50/80 651	SOCKET THEO PATHLIGHT 652	LED OVALISK 75/100 653
SOCKET GLOO PURE 27/44/70 655	SOCKET ROTOBALL 25/40/50 657	SOCKET PHOTONIA 659	SOCKET PHOTONIA 659	SOCKET OTOS GLAS 659	SOCKET CUBIX 660
SOCKET CONE 660	SOCKET MOLAT 661	SOCKET MOLAT 661	SOCKET LISENNE 40/70 662	SOCKET ADEGAN MANILA 663	SOCKET ADEGAN 663
SOCKET ALPA MUSHROOM 45/75 665	SOCKET ALPA CONE 100 665	LED APONI 90/120 666	LED TRUST 30/60 667	SOCKET BIG NAILS 50/80 668	SOCKET ROX ACRYL 30/60/90 669
SOCKET VAP SLIM 30/60/90 671	SOCKET C-POL 672	SOCKET F-POL 672	SOCKET SQUARE POLE 30/60/90 673	LED SLOTS 45/65 675	LED H-POL 30/60 676
LED H-POL TWIN 30/60 677	LED SLOTBOX 40/70 678	LED FLATT 65/100 679	LED ABRIDOR 60/100 681	LED IPERI 50 681	SOCKET QUADRASYL 75 682
LED QUAD POLE 683	LED BOOKAT 683	LED RASCALI 45/65 684	SOCKET MYRA SPOT 685	SOCKET SITRA 360 685	

1007357 597

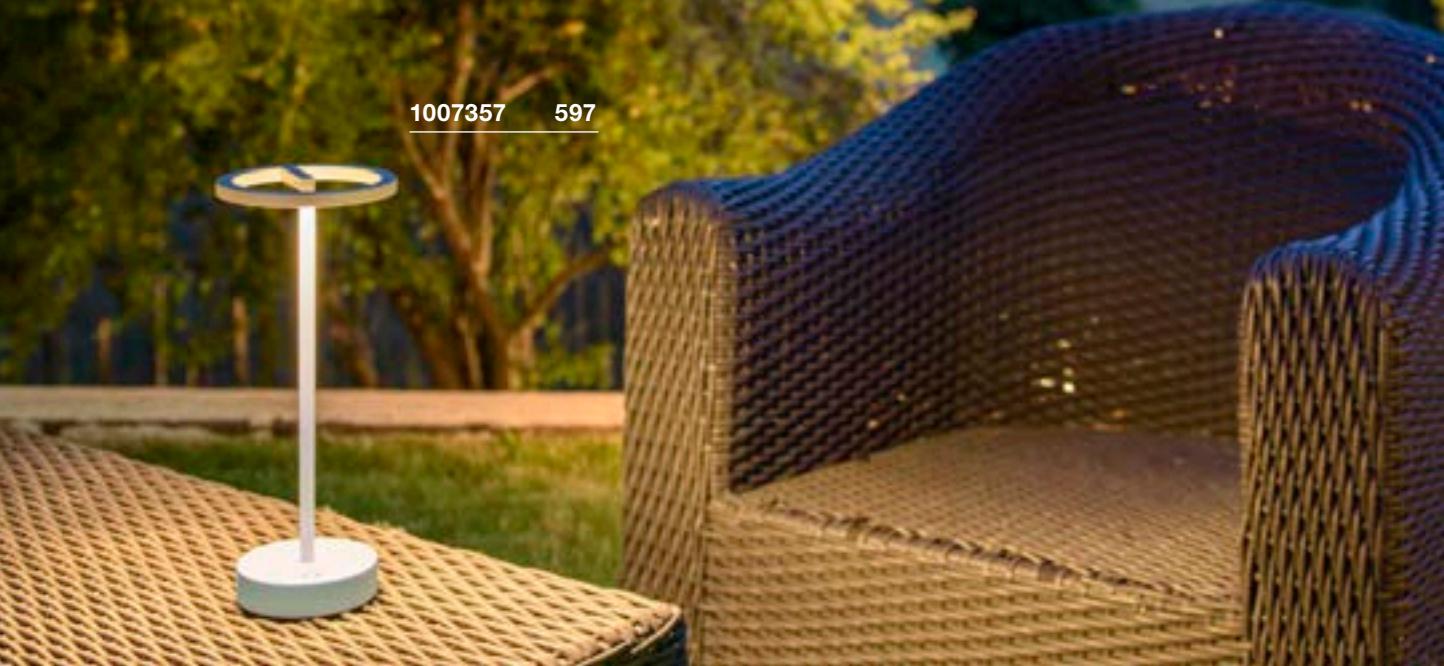

1007360 597








VINOLINA ONE TL, Battery




VINOLINA TL, Battery



5V battery operation
Total wattage: 2.5W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A



5V battery operation
Total wattage: 2.2W
Material: aluminium

- Running time 12h
- Charging time 7h
- Charging plate included
- Power adapter not included
- USB A



Down

125lm | 2700K



Down

130lm | 2700K

130lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007359 ●
<input type="radio"/> white	1007357 ●
<input checked="" type="radio"/> rust	1007358 ●



Options	Prod. no.
<input checked="" type="radio"/> black	1007362 ●
<input type="radio"/> white	1007360 ●
<input checked="" type="radio"/> rust	1007361 ●



1007697 599



VINOLINA TWO TL, Battery



5V battery operation
Total wattage: 2W
Material: aluminium

- Touch dimmable
- Running time 10h
- Charging time 5h
- Charging station for one luminaire included



Down 190lm 2200K
 2700K
 3000K

Options	Prod. no.
● black	1007693
○ white	1007692
■ sand	1007697
■ rust	1007695
■ red	1007694
■ lime green	1007696







1007380 601



1007380 601



TONILA
TL



5V battery operation
Total wattage: 1.6W
Material: aluminium/plastic

- Battery 3.6V 2000mAh included
- Power adapter excluding USB charger 5V DC/1-2A required. For MINI-USB charging cable
- Can be dimmed to 3 different levels using the switch




Down

90lm | 2700K

Options	Prod. no.
● black	1002583

TAHA
Light set, battery-powered



100-240V ~50/60Hz | 5V battery operation
Total wattage: 5W
Max. U-out driver: 5V DC
Material: aluminium/plastic


- Charging cable included



Down

200lm | 2700K

Options	Prod. no.
● black	1007380

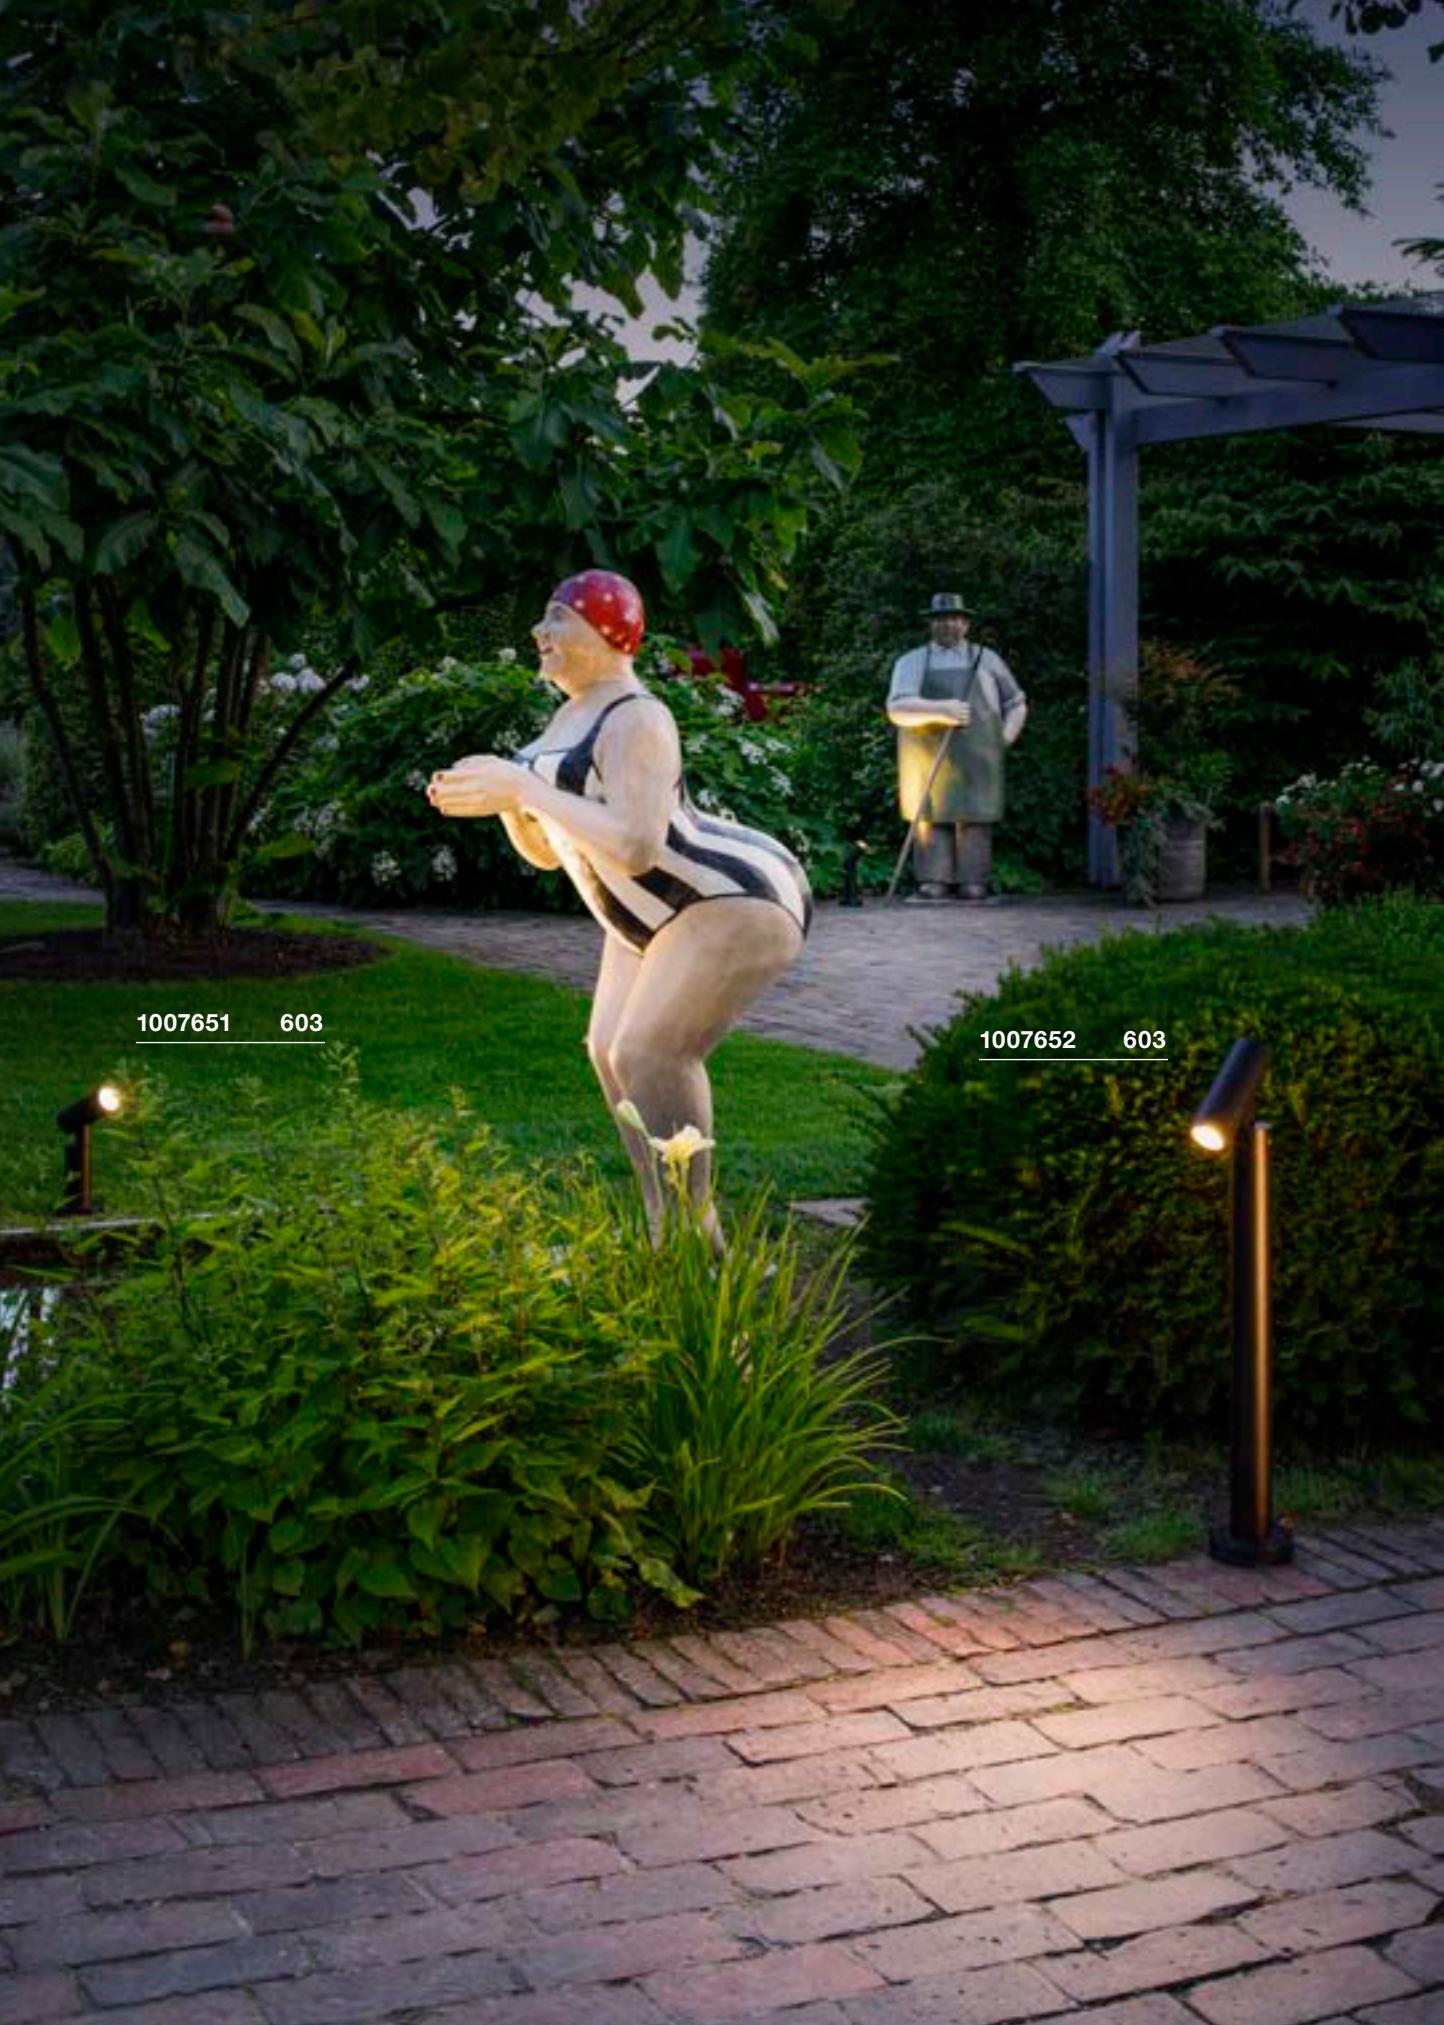




1007651 603

1007652 603



S-TUBE 32
Pole, GU10

S-TUBE 75
Pole, GU10




220-240V ~50/60Hz
Material: aluminium

- Open cable end



Base: 1xGU10 Max. diameter: 5 cm L: 5.5 cm



220-240V ~50/60Hz
Material: aluminium



- Open cable end



Base: 1xGU10 Max. diameter: 5 cm L: 5.5 cm

Options	Prod. no.
● black	1007651

Options	Prod. no.
● black	1007652

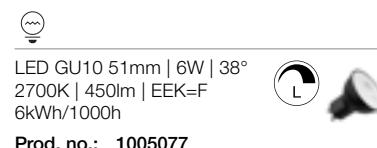

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730



1007587 605




1007584 605



PHOTONI 45
Pole, E27



PHOTONI 75
Pole, E27




220-240V ~50/60Hz
Material: aluminium

- IP connection box
- sea-air-resistant



Base: 1xE27 Max. diameter: 6 cm L: 11.6 cm

Options	Prod. no.
● black	1007587
● rust	1007583



220-240V ~50/60Hz
Material: aluminium

- IP connection box
- sea-air-resistant



Base: 1xE27 Max. diameter: 6 cm L: 11.6 cm

Options	Prod. no.
● black	1007584
● rust	1007580



A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h


Prod. no.: 1005305






A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no.: 1005305



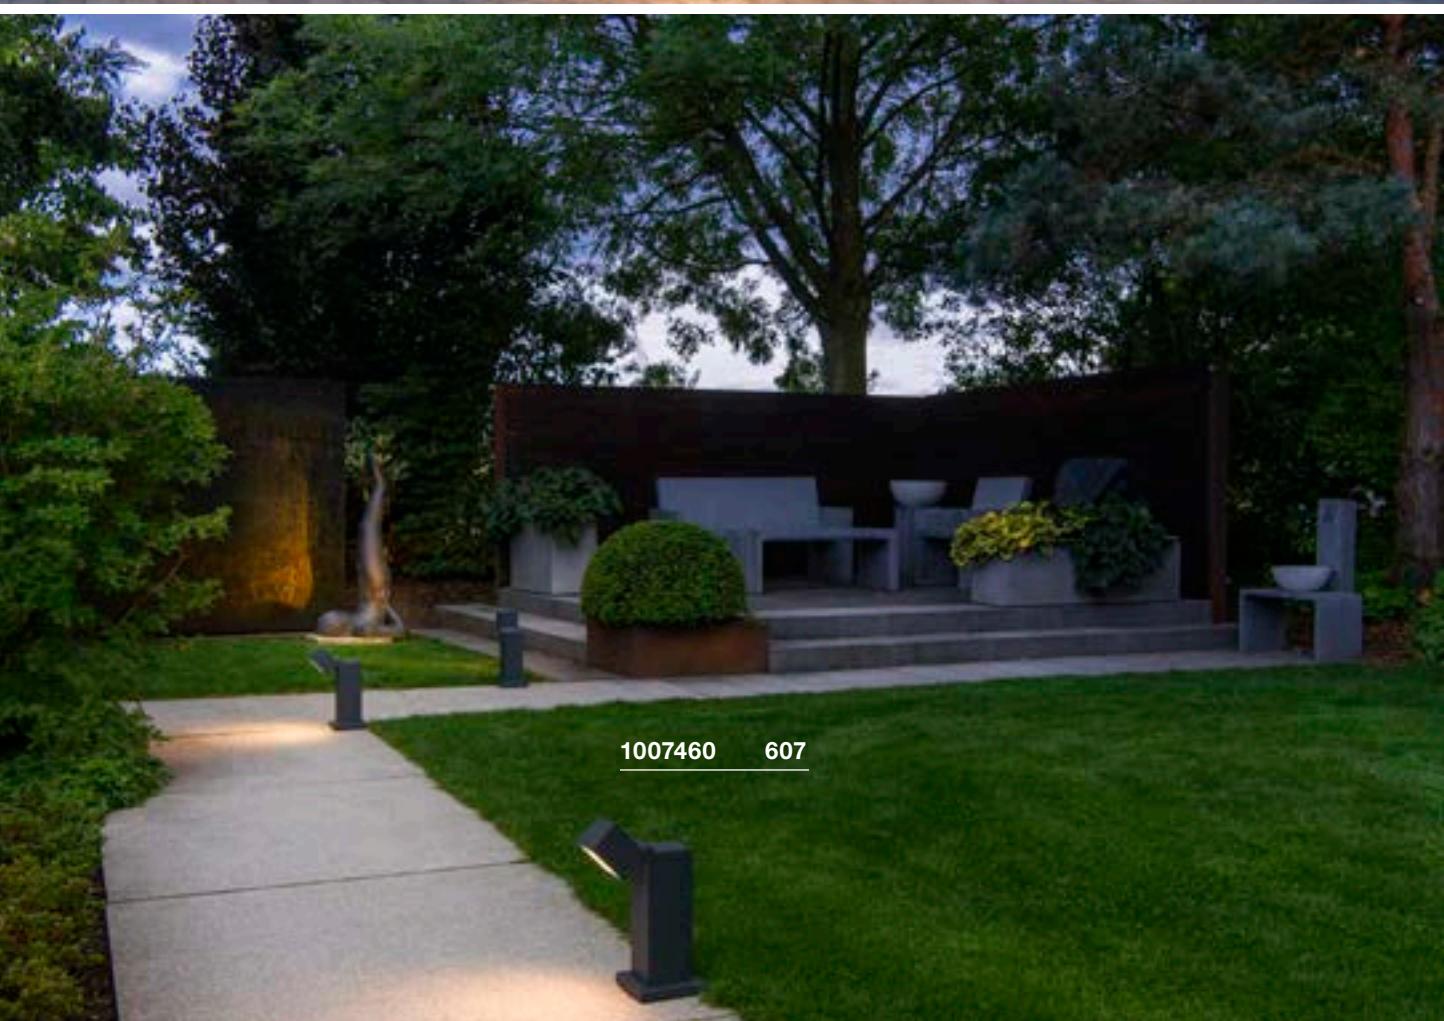


S-CUBE 35
Pole

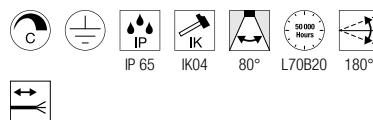
S-CUBE 75
Pole


220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end



Down 1000lm | 2700K | 1200lm | 3000K

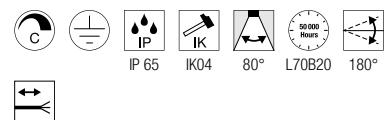

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end



Down 1000lm | 2700K | 1200lm | 3000K

Options	Prod. no.
● anthracite	1007460

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

Options	Prod. no.
● anthracite	1007459

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730







1007513 609



R-CUBE 35 Pole



R-CUBE 75 Pole

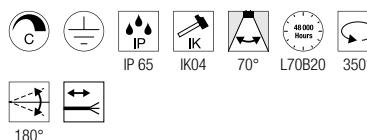

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Open cable end

LED INSIDE	CRI 80
Down	800lm 2700K
	800lm 3000K


LED INSIDE	CRI 80
Down	800lm 2700K
	800lm 3000K

Options	Prod. no.
● anthracite	1007513

Options	Prod. no.
● anthracite	1007512

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730



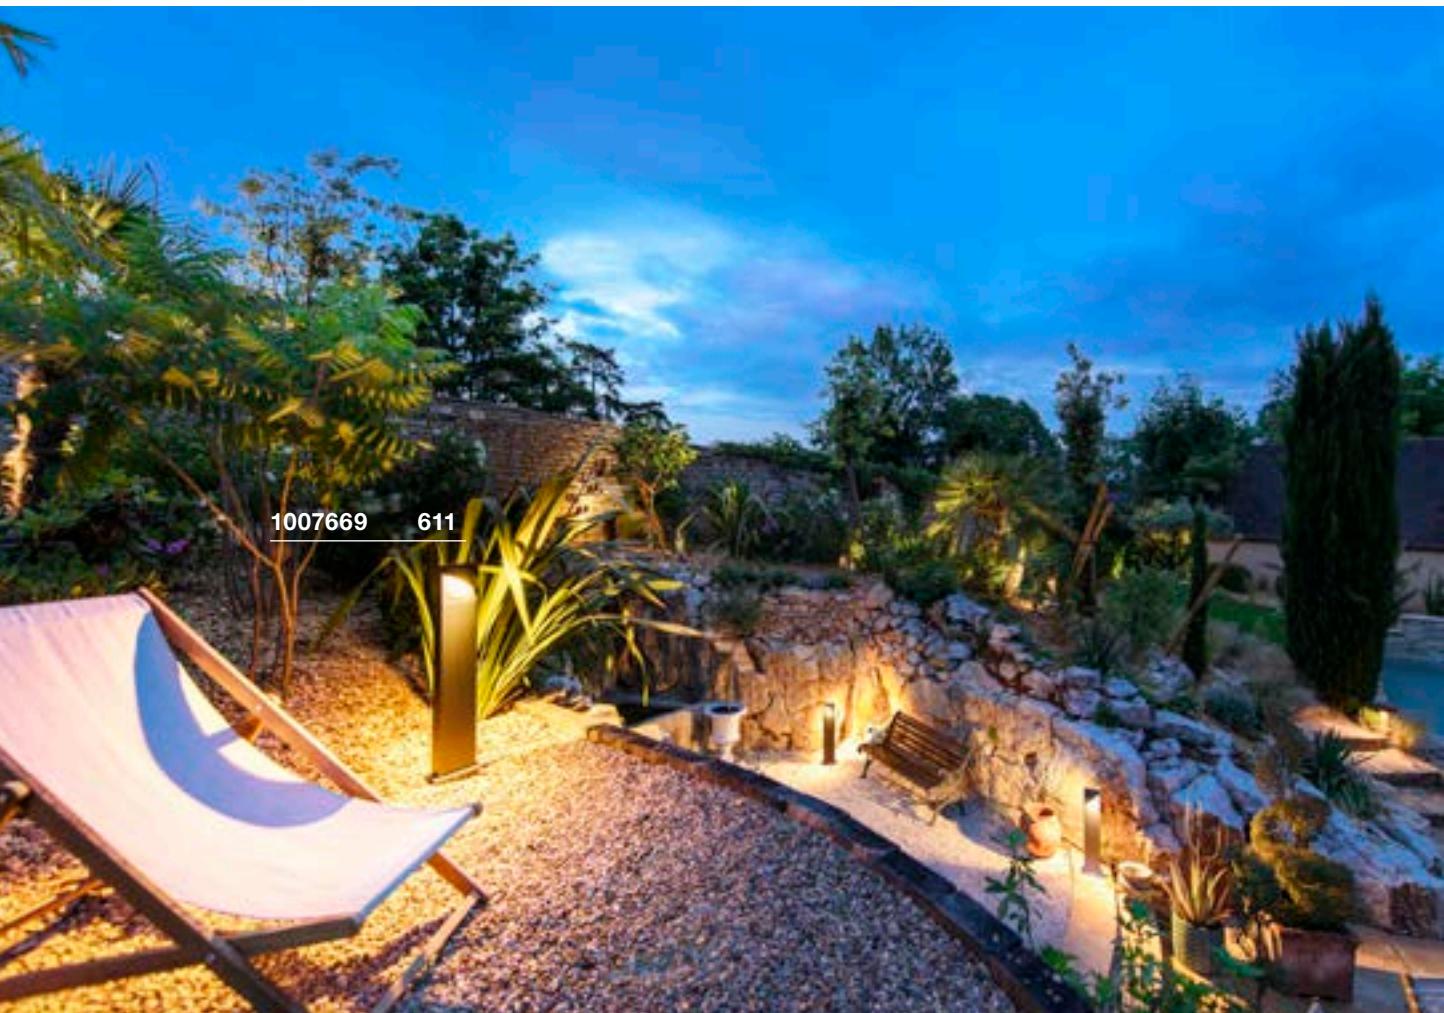




LID I 75
Pole, double



LID I 45
Pole, single

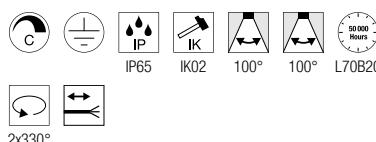


220-240V ~50/60Hz | 700mA

Total wattage: 29W

Material: aluminium

- Open cable end



220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium

- Open cable end



CRI
80

Down 850lm | 2700K | 1000lm | 3000K



CRI
80

Down 900lm | 2700K | 1050lm | 3000K

Options	Prod. no.
● anthracite	1007669

Options	Prod. no.
● anthracite	1007670



Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730





Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730



1007237 613



I-RING Pole



100-240V ~50/60Hz | 350mA
Total wattage: 9.2W
Material: aluminium



Down

670lm | 3000K




Options	Prod. no.
● anthracite	1007237

Product	Prod. no.
Screw set	
● Stainless steel	228753


M-POL S
Polehead 360°, Glare reduction



M-POL S
Polehead 360°, Glare reduction,
DALI



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



CRI 80

Down 750lm | 2700K



CRI 80

Down 750lm | 2700K

Options	Prod. no.
● anthracite	1007232


Options	Prod. no.
● anthracite	1007233

⊕	Product	Prod. no.
pole		
● anthracite		
H: 23,4 cm	1006379	
● anthracite		
H: 53,4 cm	1006380	
● anthracite		
H: 83,4 cm	1006381	
Ground anchor		
● Stainless steel	1006382	
T-connector box		
● black	228726	
Connection box IP68, 3-pole		
● black	228730	

⊕	Product	Prod. no.
pole		
● anthracite		
H: 23,4 cm	1006379	
● anthracite		
H: 53,4 cm	1006380	
● anthracite		
H: 83,4 cm	1006381	
Ground anchor		
● Stainless steel	1006382	
Connection box		
● black	228725	
IP68 CONNECTION BOX, 5-pole		
● black	1006453	



1006381 + 1007233 623 + 614

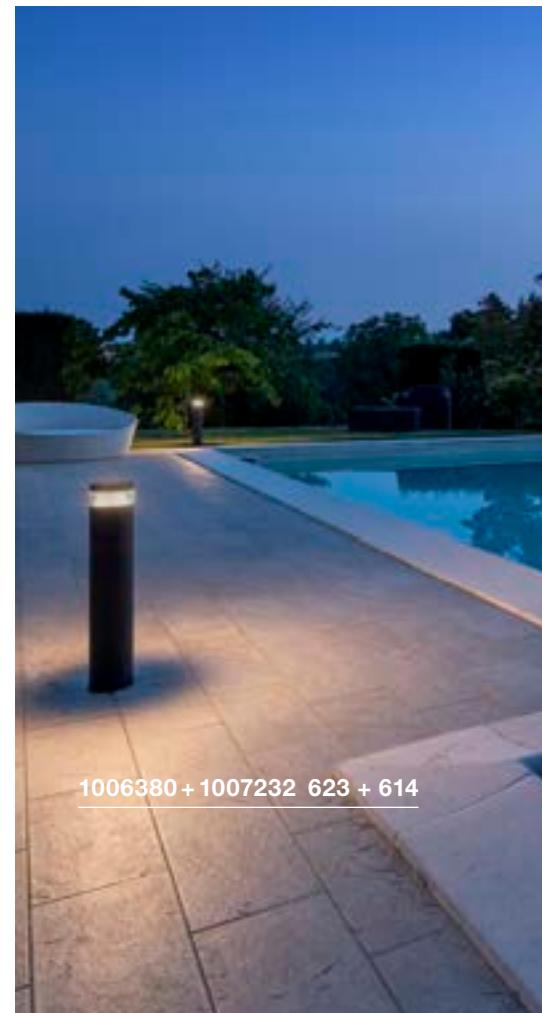

1006380 + 1007232 623 + 614



M-POL S

Polehead 180°, Glare reduction

M-POL S
Polehead 180°, Glare reduction,
DALI





NEW




NEW



1006380 + 1007235 623 + 615



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium



Down 700lm | 2700K

Options	Prod. no.
● anthracite	1007234 ●



Down 700lm | 2700K


Options	Prod. no.
● anthracite	1007235 ●



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730




Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453 ●

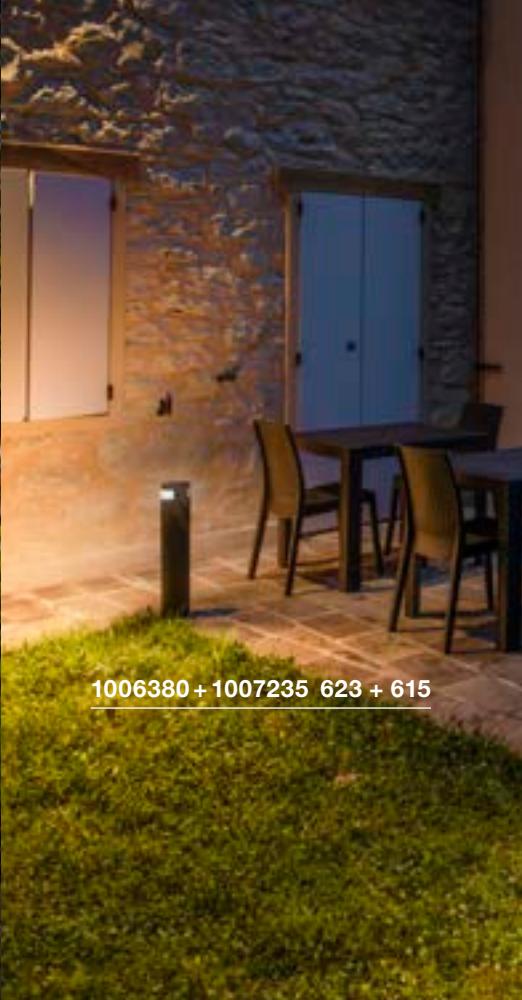


M-POL S Polehead



1006381 + 1006389 623 + 617



1006381 + 1006393 623 + 617



220-240V ~50/60Hz | 500mA

Power consumption: 9W

Total wattage: 11W

Material: aluminium



Down 470lm | 2700K | 510lm | 3000K

Options	Prod. no.
● anthracite	1006383



Product	Prod. no.
---------	-----------

pole
● anthracite 1006379

H: 23.4 cm
● anthracite 1006380

H: 53.4 cm
● anthracite 1006381

H: 83.4 cm
● Stainles steel 1006382

Ground anchor
● black 228726

T-connector box
● black 228727

Connection box IP68, 3-pole
● black 228730







M-POL S Polehead, DALI




M-POL S Polehead, Shader




M-POL S Polehead, Shader, DALI



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium



220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium



Down 890lm | 2700K | 950lm | 3000K



Down 285lm | 2700K | 310lm | 3000K



Down 520lm | 2700K | 550lm | 3000K

Options	Prod. no.
● anthracite	1006389

Options	Prod. no.
● anthracite	1006387



Options	Prod. no.
● anthracite	1006393

Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453

Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453

M-POL S
Polehead, Louver



220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium





Down 145lm | 2700K | 155lm | 3000K

Options	Prod. no.
● anthracite	1006385



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

M-POL S
Polehead, Louver, DALI



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium






Down 260lm | 2700K | 270lm | 3000K

Options	Prod. no.
● anthracite	1006391



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228725
Connection box IP68, 5-pole	
● black	1006453

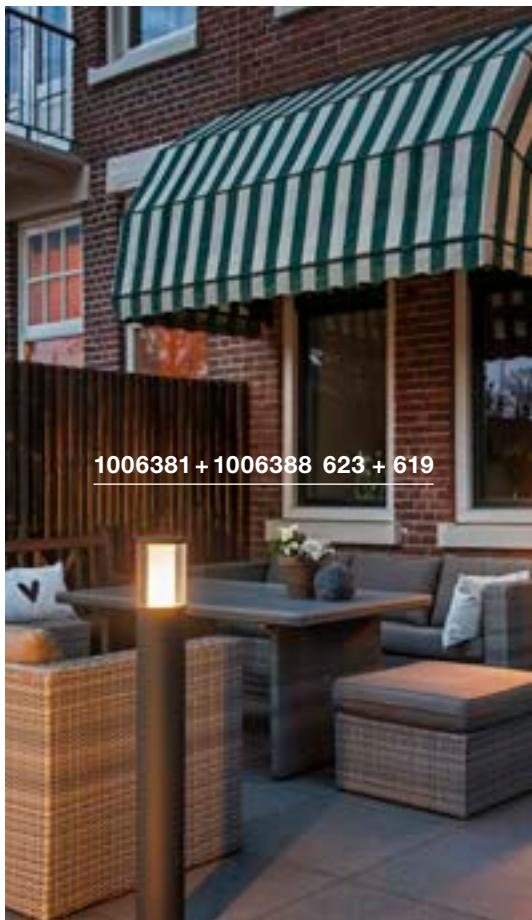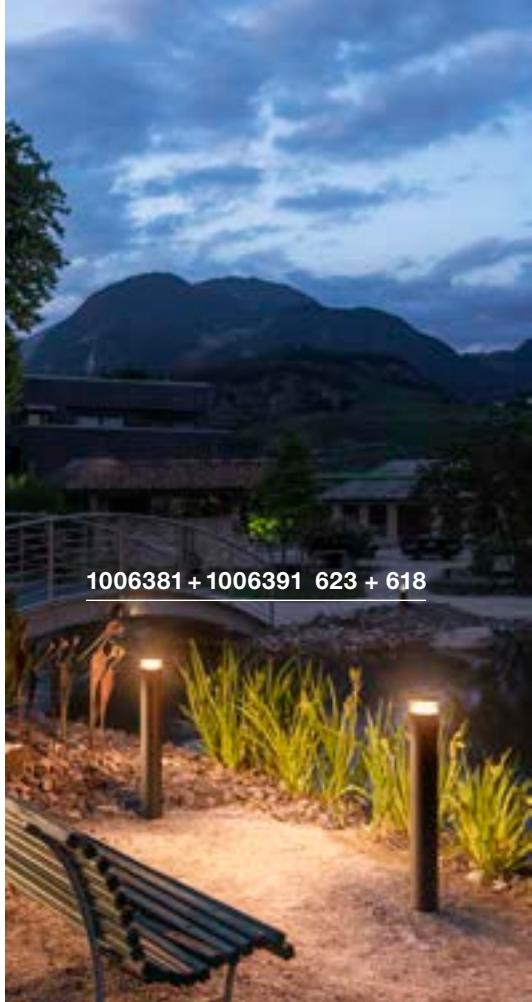

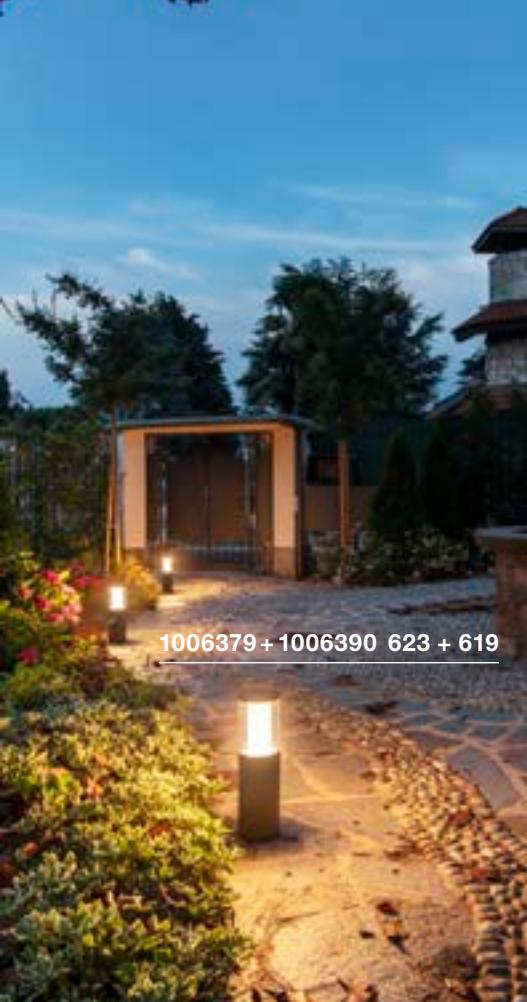




M-POL M Polehead



1006379 + 1006390 623 + 619



M-POL M Polehead, DALI




220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium



CRI
90

Down 590lm | 2700K | 660lm | 3000K

Options	Prod. no.
● anthracite	1006384



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium



CRI
90

Down 1150lm | 2700K | 1230lm | 3000K

Options	Prod. no.
● anthracite	1006390



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730





Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453

1006379 + 1006384 623 + 619



M-POL M
Polehead, Shader



220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium



Down 420lm | 2700K 460lm | 3000K



Options	Prod. no.
● anthracite	1006388



Product	Prod. no.
pole	
● anthracite	
H: 23.4 cm	1006379
● anthracite	
H: 53.4 cm	1006380
● anthracite	
H: 83.4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

1006381 + 1006388 623 + 620

M-POL M
Polehead, Shader, DALI



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium



Down 820lm | 2700K 870lm | 3000K

Options	Prod. no.
● anthracite	1006394



Product	Prod. no.
pole	
● anthracite	
H: 23.4 cm	1006379
● anthracite	
H: 53.4 cm	1006380
● anthracite	
H: 83.4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453






1006381 + 1006392 623 + 621


M-POL M Polehead, Louver



M-POL M Polehead, Louver, DALI



220-240V ~50/60Hz | 500mA
Power consumption: 9W
Total wattage: 11W
Material: aluminium



220-240V ~50/60Hz | 500mA
Power consumption: 17W
Total wattage: 19W
Material: aluminium



Down 190lm | 2700K | 210lm | 3000K



Down 350lm | 2700K | 370lm | 3000K

Options	Prod. no.
● anthracite	1006386

Options	Prod. no.
● anthracite	1006392



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730



Product	Prod. no.
pole	
● anthracite	
H: 23,4 cm	1006379
● anthracite	
H: 53,4 cm	1006380
● anthracite	
H: 83,4 cm	1006381
Ground anchor	
● Stainless steel	1006382
Connection box	
● black	228725
IP68 CONNECTION BOX, 5-pole	
● black	1006453



1006380 + 1006392 623 + 621



M-POL 30
Pole

M-POL 60
Pole

M-POL 90
Pole



Material: aluminium

Options	Prod. no.
● anthracite	1006379



Product	Prod. no.
IP68 CONNECTION BOX, 5-pole	
● black	1006453
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

Material: aluminium

Options	Prod. no.
● anthracite	1006380



Product	Prod. no.
IP68 CONNECTION BOX, 5-pole	
● black	1006453
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

Material: aluminium

Options	Prod. no.
● anthracite	1006381



Product	Prod. no.
IP68 CONNECTION BOX, 5-pole	
● black	1006453
T-connector box	
● black	228726
Connection box IP68, 3-pole	
● black	228730

DESIGN YOUR M-POL SYSTEM

The right bollard lights in a few steps – made possible with the M-POL system. It combines three sizes and eight lamp heads with five light properties and two colour temperatures. Whether in high or flat form, with shaders for less light on one side, homogeneous and diffuse radiance or glare-free thanks to integrated louvres. Whether 2700 or 3000 Kelvin, controllable as an On/Off version or DALI. Configure your chosen M-POL bollard lights and showcase every outdoor ambience in its best light.

CHOOSE YOUR PREFERRED ...

- ① bollard (30, 60, 90)
- ② Lamp head (On/Off, DALI)
- ③ Lamp head size (high, flat)
- ④ Light property (Clear, Shader, Louver)
- ⑤ Colour temperature (2700K, 3000K)



DONE!

LAMP HEADS

M-POL S

Diameter: 12.3 cm, H: 15.9 cm



Clear

Shader

Louver

180° direction

360° direction



M-POL M




Diameter: 12.3 cm, H: 25.9 cm



Clear

Shader

Louver



M-POL 30

Diameter: 12.4 cm, H: 23.4 cm

M-POL 60

Diameter: 12.4 cm, H: 53.4 cm

M-POL 90

Diameter: 12.4 cm, H: 83.4 cm

BOLLARDS






1006408 627



CONCRETO FL, round, QPAR 51



CONCRETO FL, square, QPAR51




220-240V ~50/60Hz
Material: concrete/aluminium

- IP44 safety plug



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm

Options	Prod. no.
● grey	1006408



220-240V ~50/60Hz
Material: concrete/aluminium

- IP44 contour plug



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm

Options	Prod. no.
● grey	1006409



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077







1004749 629

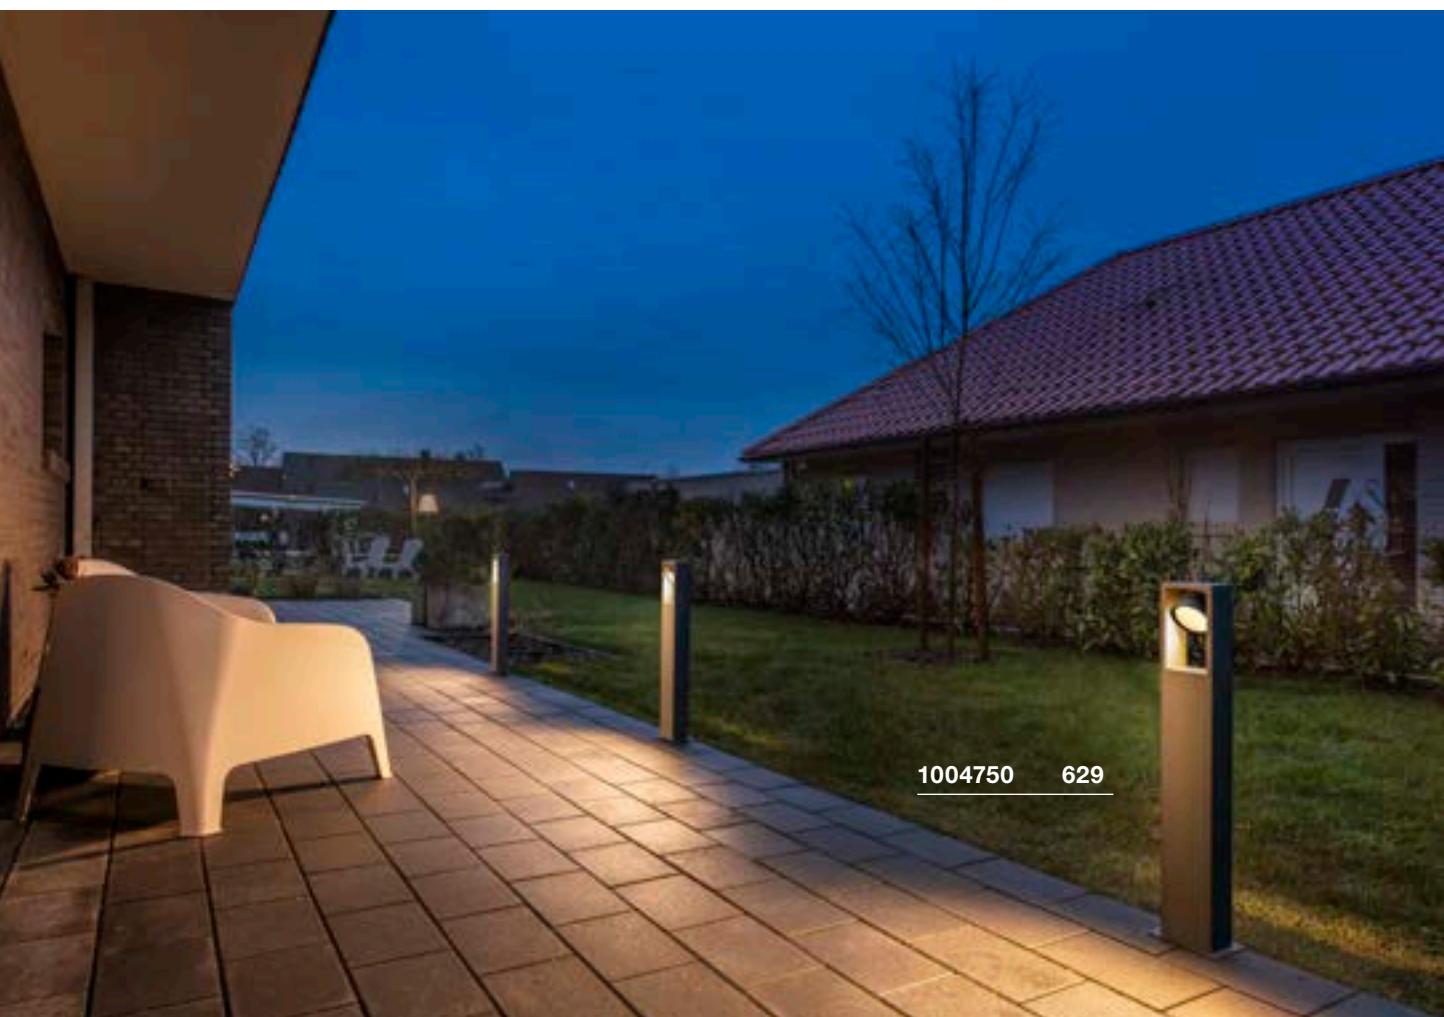

1004750 629



ESKINA FRAME 45 Pole, single




220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium

ESKINA FRAME 75 Pole, single





220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium

ESKINA FRAME 75 Pole, double



220-240V ~50/60Hz | 700mA

Total wattage: 27W

Material: aluminium



Down 1100lm | 3000K | 1200lm | 4000K



Down 1100lm | 3000K | 1200lm | 4000K

Spot 1 1100lm | 3000K | 1200lm | 4000K
Spot 2 1100lm | 3000K | 1200lm | 4000K

Options	Prod. no.
● anthracite	1004749

Options	Prod. no.
● anthracite	1004750

Options	Prod. no.
● anthracite	1004751



Product	Prod. no.
Connection box IP68, 3-pole	

● black **228730**

Product	Prod. no.
Connection box IP68, 3-pole	



● black **228730**

Product	Prod. no.
Connection box IP68, 3-pole	

● black **228730**

ESKINA FRAME 125

Pole, double



220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium





Spot 1 1100lm | 3000K | 1200lm | 4000K
Spot 2 1100lm | 3000K | 1200lm | 4000K

Options	Prod. no.
● anthracite	1005439

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

ESKINA FRAME 175

Pole, double





220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium








Spot 1 1100lm | 3000K | 1200lm | 4000K
Spot 2 1100lm | 3000K | 1200lm | 4000K

Options	Prod. no.
● anthracite	1005440

Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

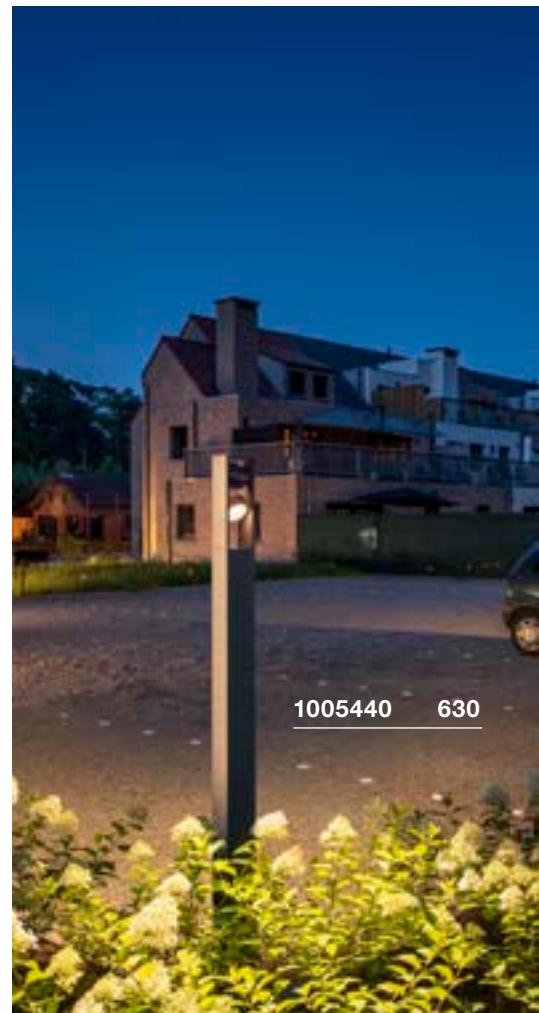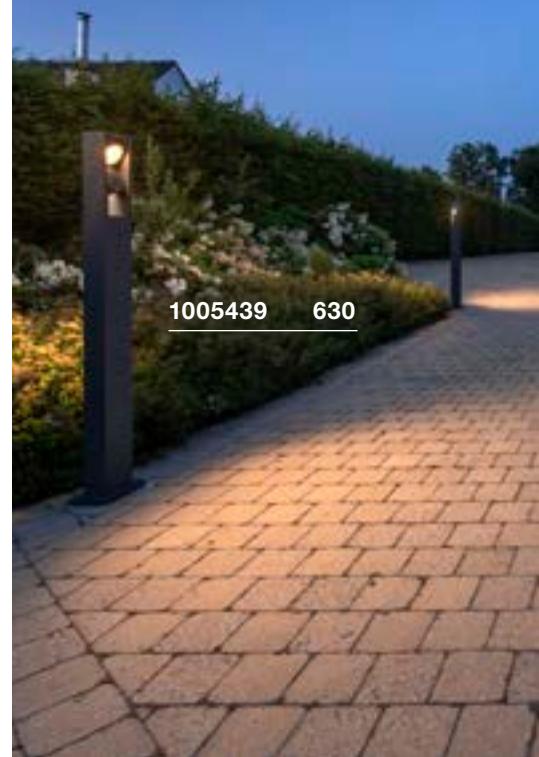

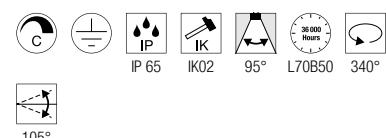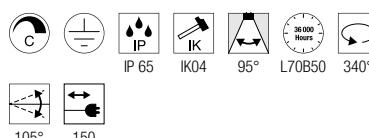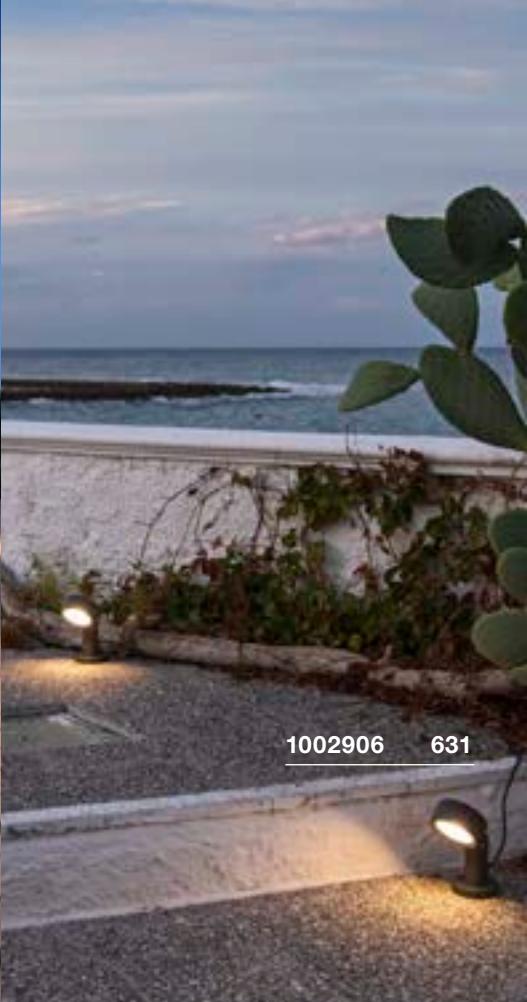ESKINA 30
PoleESKINA 80
Pole

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

- IP44 safety plug



CRI 80

Down 1000lm | 3000K | 4000K



CRI 80

Down 1000lm | 3000K | 4000K

Options	Prod. no.
● anthracite	1002906

Options	Prod. no.
● anthracite	1002907


Product	Prod. no.
Ground spike ● grey	230060




Product	Prod. no.
Ground spike ● grey	230060
Connection box IP68, 3-pole ● black	228730

232115 **633**




232125 **633**

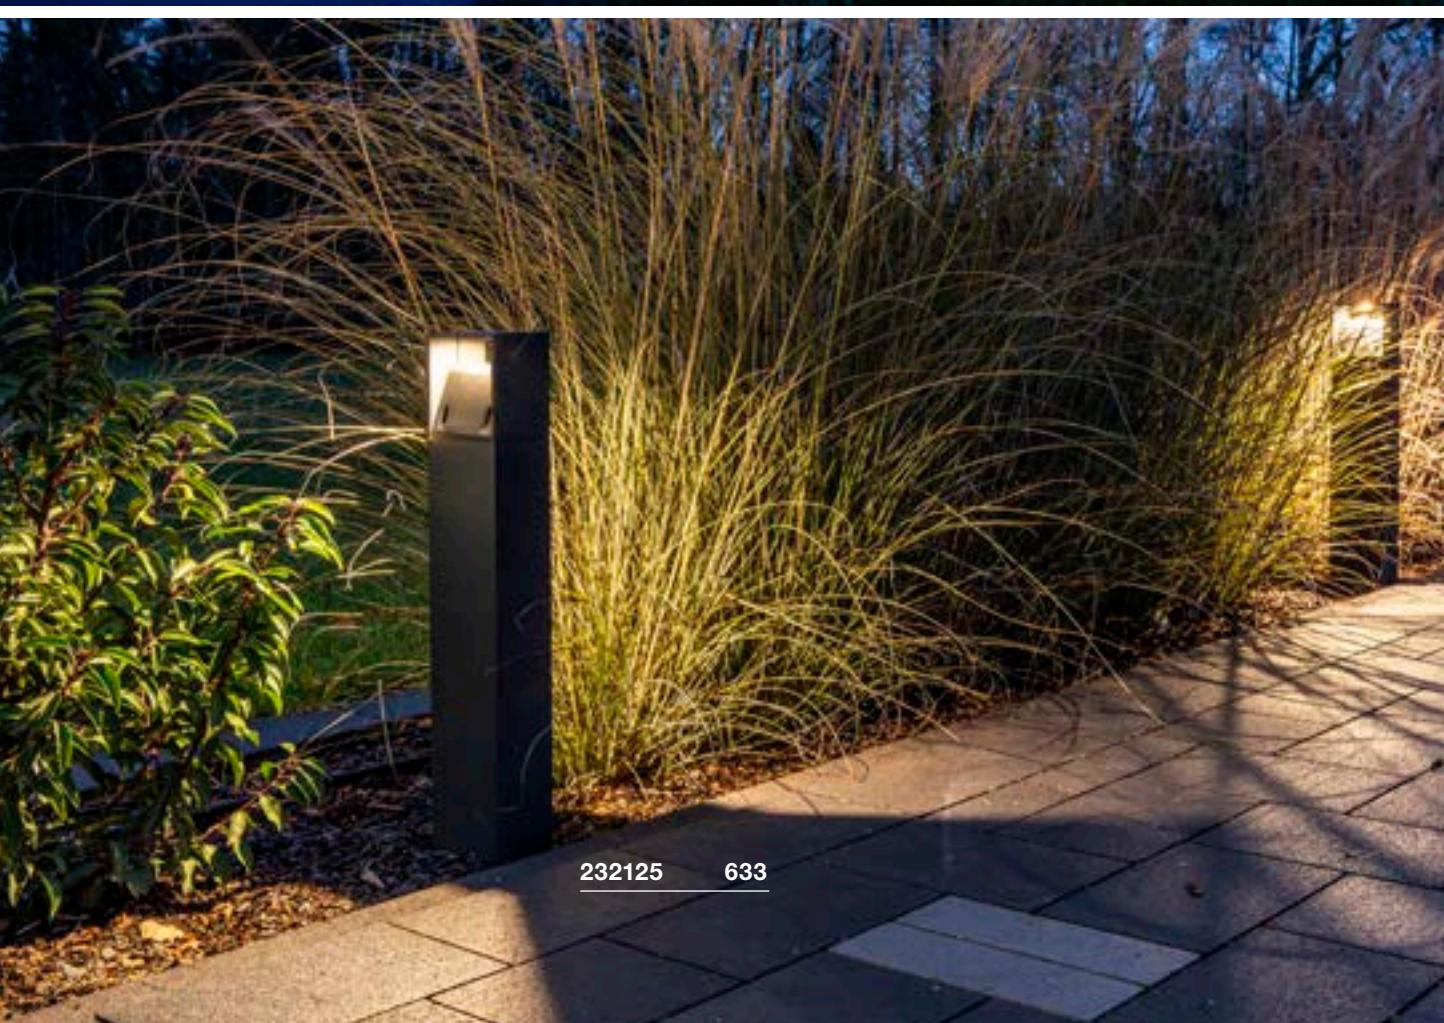

LOGS 40
PoleLOGS 70
Pole

220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

- Open cable end



220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

- Open cable end



Down 570lm | 3000K



Down 570lm | 3000K

Options	Prod. no.
● anthracite	232115

Options	Prod. no.
● anthracite	232125




Product	Prod. no.
Concrete anchor	
● grey	232119
Ground spike	
● grey	231230
Screw set	
● Stainless steel	228754
Connection box IP68, 3-pole	
● black	228730



Product	Prod. no.
Concrete anchor	
● grey	232119
Ground spike	
● grey	231230
Screw set	
● Stainless steel	228754
Connection box IP68, 3-pole	
● black	228730



1006180 635


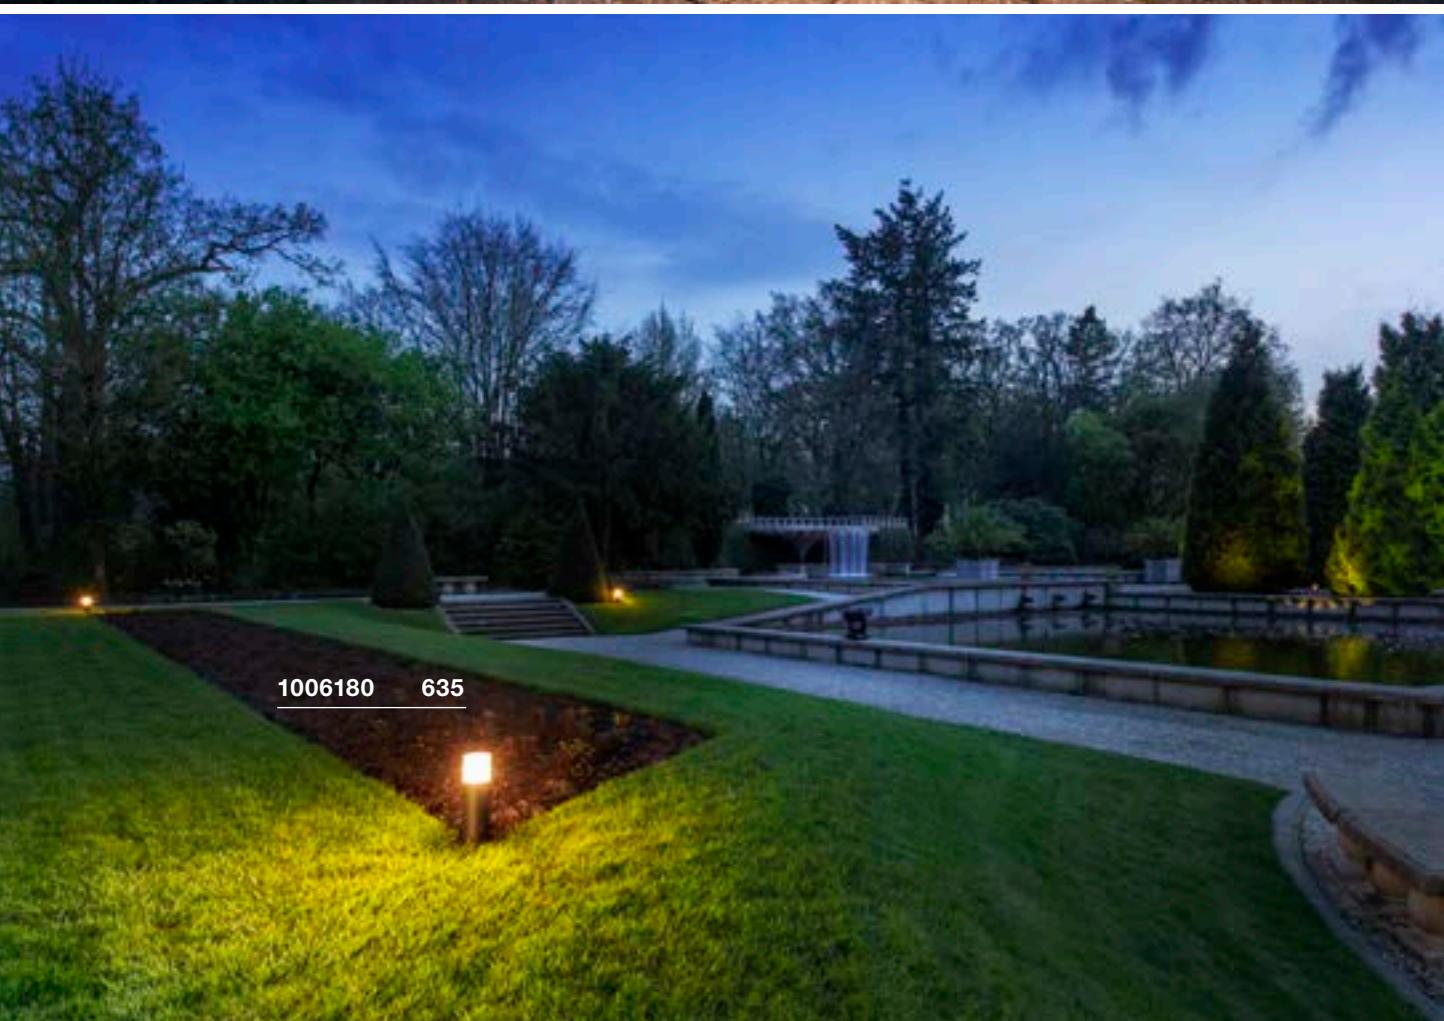


1006180 635



GRAFIT 30

Pole, Round, E27



220-240V ~50/60Hz
Material: aluminium/acrylic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006180



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h



Prod. no.: 1005289



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

GRAFIT 60

Pole, Round, E27



220-240V ~50/60Hz
Material: aluminium/acrylic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006181



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h


Prod. no.: 1005289



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

GRAFIT 90

Pole, Round, E27



220-240V ~50/60Hz
Material: aluminium/acrylic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006182



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730





231225 637



1006184 637



GRAFIT 30 Pole, E27



220-240V ~50/60Hz
Material: aluminium/plastic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	231215





LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Ground spike	
● grey	231230
Screw set	
● Stainless steel	228754
Connection box IP68, 3-pole	
● black	228730

GRAFIT 60 Pole, E27



220-240V ~50/60Hz
Material: aluminium/plastic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	231225





LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



GRAFIT 90 Pole, E27



220-240V ~50/60Hz
Material: aluminium/acrylic

- Open cable end



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006184



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Ground spike	
● grey	231230
Screw set	
● Stainless steel	228754
Connection box IP68, 3-pole	
● black	228730





A photograph of a modern garden at dusk or night. In the foreground, a low, curved brick wall made of dark red bricks runs across the frame. On top of the wall sits a tall, rectangular lantern with a black frame and a glass panel, emitting a warm glow. Behind the wall is a lush green lawn. In the background, there's a modern building with a flat roof and large windows, partially obscured by trees. The sky is a soft orange and yellow, suggesting sunset or sunrise. The overall atmosphere is peaceful and contemporary.

1005442 639



QUADRULO FL



100-277V ~50/60Hz | 480mA

Total wattage: 7W

Material: aluminium/acrylic

- IP connection box





CRI
80

Down

340lm | 3000K

Options	Prod. no.
● anthracite	1005442

RUSTY® SLOT 50
Pole



220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSI steel/polycarbonate (PC)

- Open cable end





Down 30lm | 3000K

Options	Prod. no.
● rust	233447



Product	Prod. no.
Ground spike	
● grey	231230
Connection box IP68, 3-pole	
● black	228730

RUSTY® SLOT 80
Pole



220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSI steel/polycarbonate (PC)

- Open cable end




Down 30lm | 3000K

Options	Prod. no.
● rust	233457



Product	Prod. no.
Ground spike	
● grey	231230
Connection box IP68, 3-pole	
● black	228730


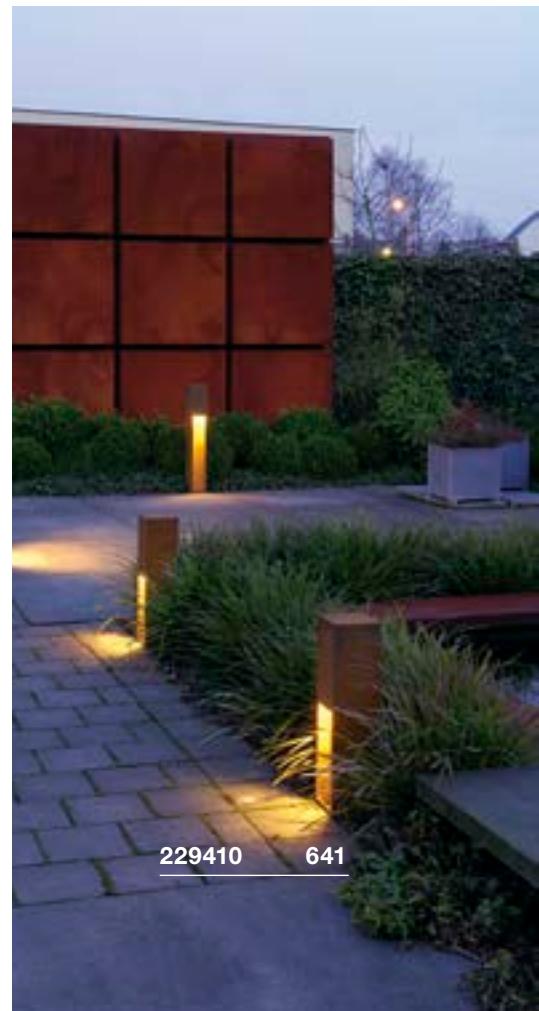





RUSTY® SLOT 50
Pole, E27

RUSTY® SLOT 80
Pole, E27

233457 640



229411 641




220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm



220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229410

Options	Prod. no.
● rust	229411



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290






Product	Prod. no.
Ground spike	
● grey	231230
Connection box IP68, 3-pole	
● black	228730

Product	Prod. no.
Ground spike	
● grey	231230
Connection box IP68, 3-pole	
● black	228730

RUSTY® PATHLIGHT
Pole, TCR-TSE

233090 642




220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Base: 1xG53 Max. diameter: 7.5 cm L: 2.7 cm



220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Down 90lm | 3000K

Options	Prod. no.
● rust	233427



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271



C,L



Product	Prod. no.
Ground spike	229422

Connection box IP68, 3-pole

● black 228730

229420 643



Product	Prod. no.
Ground spike	229422

Connection box IP68, 3-pole

● black 228730







RUSTY® 70
Pole



RUSTY® 40
Pole, E27




RUSTY® 70
Pole, E27




220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Down 90lm | 3000K



Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm



Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	233437

Options	Prod. no.
● rust	229420

Options	Prod. no.
● rust	229421



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h


Prod. no.: 1005290





Product	Prod. no.
Ground spike	
● grey	229422
Connection box IP68, 3-pole	
● black	228730



Product	Prod. no.
Ground spike	
● grey	229422
Connection box IP68, 3-pole	
● black	228730

Product	Prod. no.
Ground spike	
● grey	229422
Connection box IP68, 3-pole	
● black	228730


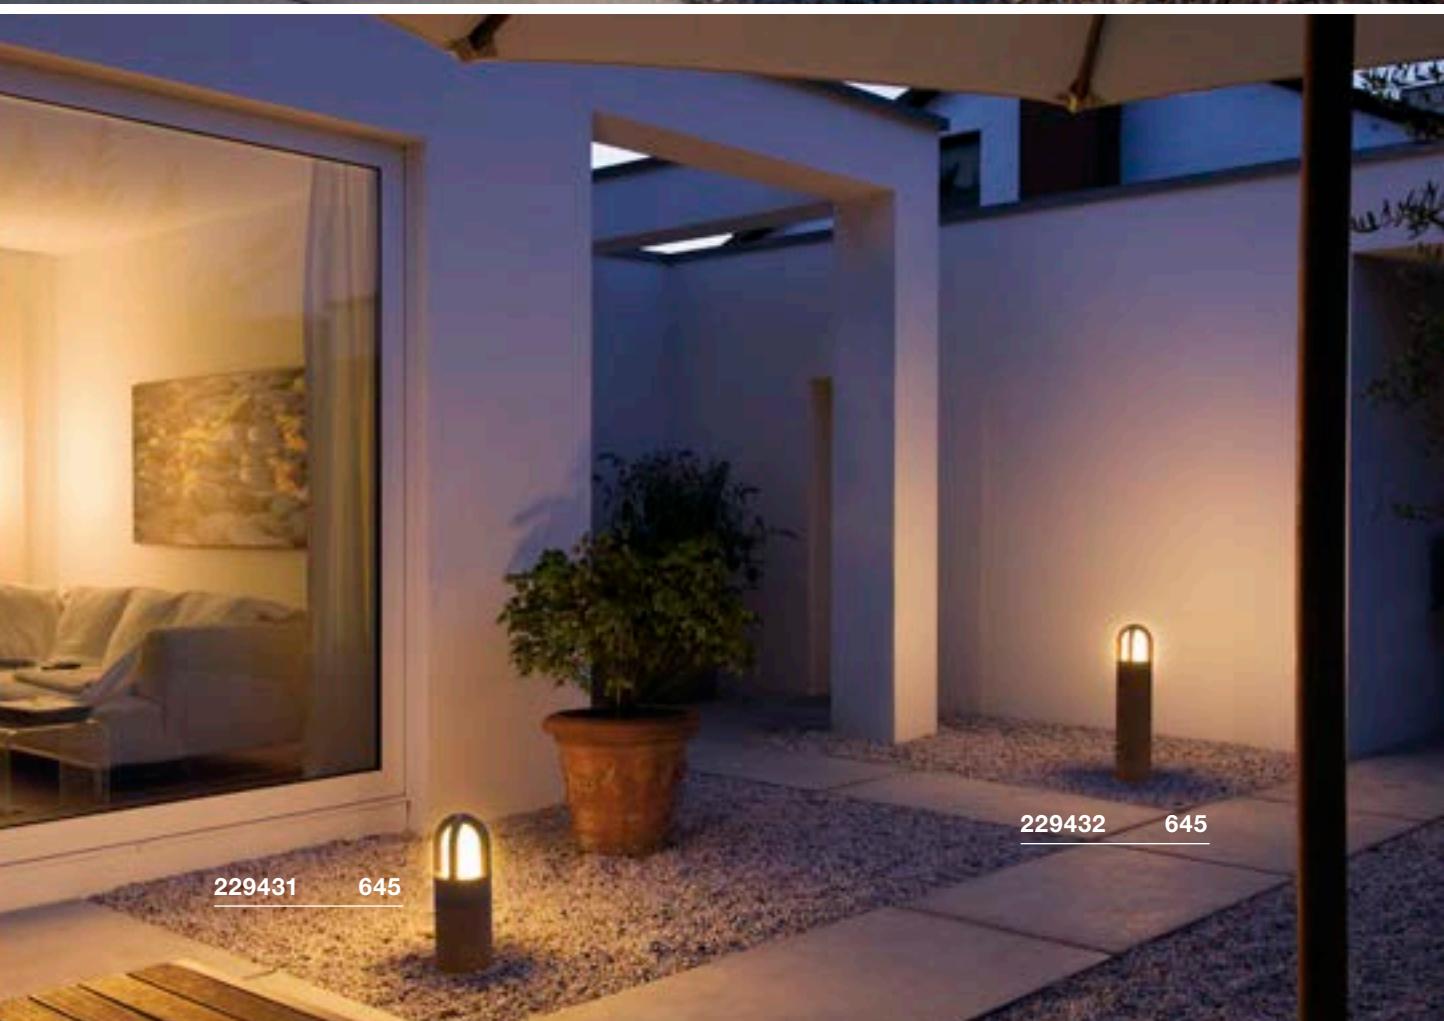



RUSTY® CONE 24
FL, E14


220-240V ~50/60Hz
Material: FeCSi steel/glass

RUSTY® CONE 40
Pole, E27


220-240V ~50/60Hz
Material: FeCSi steel/glass

RUSTY® CONE 70
Pole, E27


220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end

SOCKET INSIDE <40 W

Base: 1xE14 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229430

C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285


SOCKET INSIDE <11 W

Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229431

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289


SOCKET INSIDE <11 W

Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229432

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Ground spike	
● grey	229422



Connection box IP68, 3-pole
● black 228730



Product	Prod. no.
Ground spike	
● grey	229422

Connection box IP68, 3-pole
● black 228730

RUSTY® 40
Pole, E27



220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229020





LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290



RUSTY® 70
Pole, E27



220-240V ~50/60Hz
Material: FeCSi steel/polycarbonate (PC)

- Open cable end




Base: 1xE27 Max. diameter: 4.8 cm L: 13.9 cm

Options	Prod. no.
● rust	229021



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289

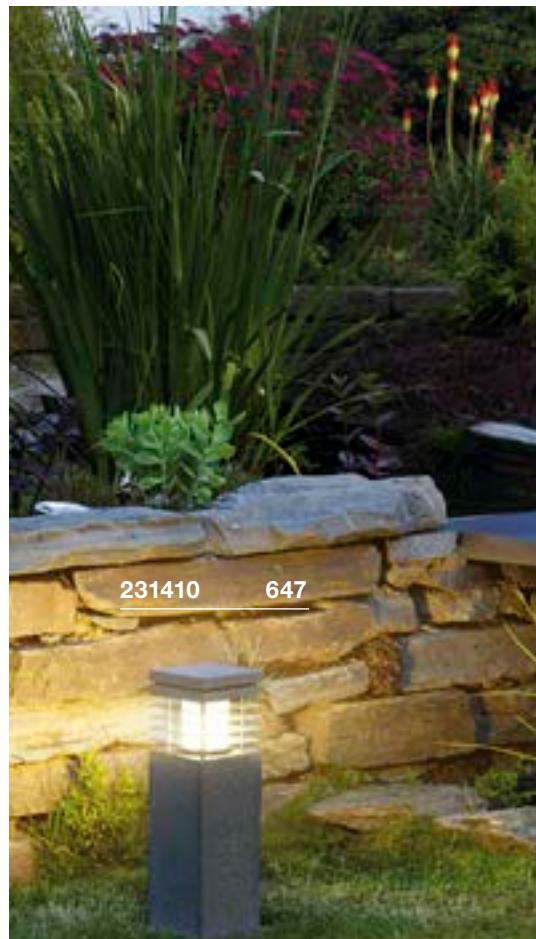

Product	Prod. no.
Ground spike	
● Stainless steel	229022

Connection box IP68, 3-pole
● black 228730



Product	Prod. no.
Ground spike	
● Stainless steel	229022

Connection box IP68, 3-pole
● black 228730



ARROCK GRANITE 40
Pole, square, E27



ARROCK GRANITE 70
Pole, square, E27



220-240V ~50/60Hz
Material: granite/stainless steel 304



Base: 1xE27 Max. diameter: 5.2 cm L: 11.5 cm


Options	Prod. no.
● grey	231410

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Ground spike	
● Stainless steel	229022
Connection box IP68, 3-pole	
● black	228730



220-240V ~50/60Hz
Material: granite/stainless steel 304



Base: 1xE27 Max. diameter: 5.2 cm L: 11.5 cm

Options	Prod. no.
● grey	231411



LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290




Product	Prod. no.
Ground spike	
● Stainless steel	229022
Connection box IP68, 3-pole	
● black	228730

ARROCK ARC
Pole, QPAR51



220-240V ~50/60Hz
Material: granite/stainless steel 304

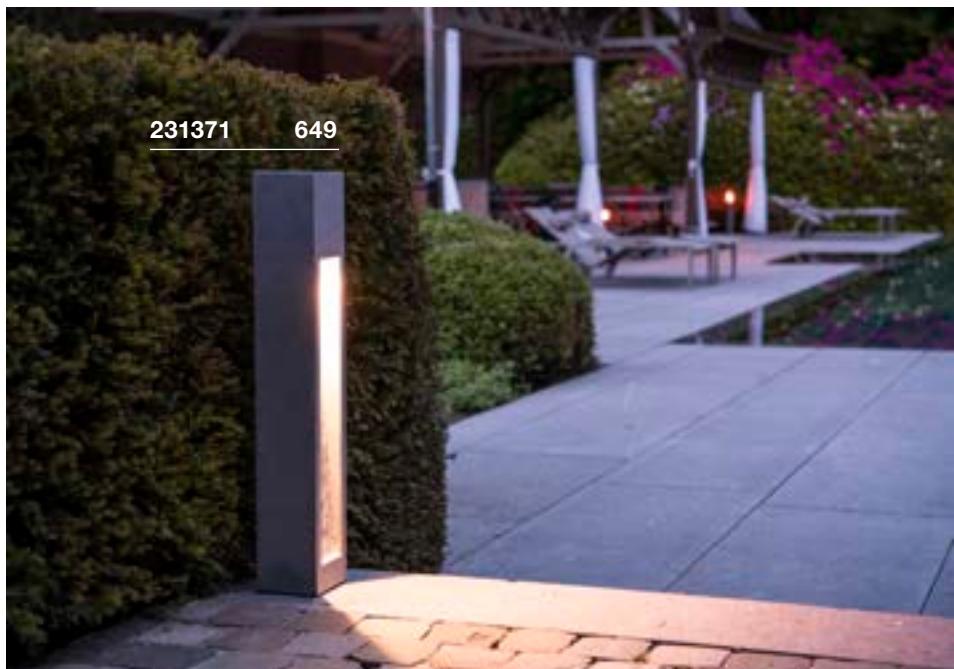

SOCKET INSIDE <35 W

Base: 1xGU10 Max. diameter: 5.1 cm L: 7.6 cm

Options	Prod. no.
● grey	231420




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005075







Product	Prod. no.
Ground spike	231233

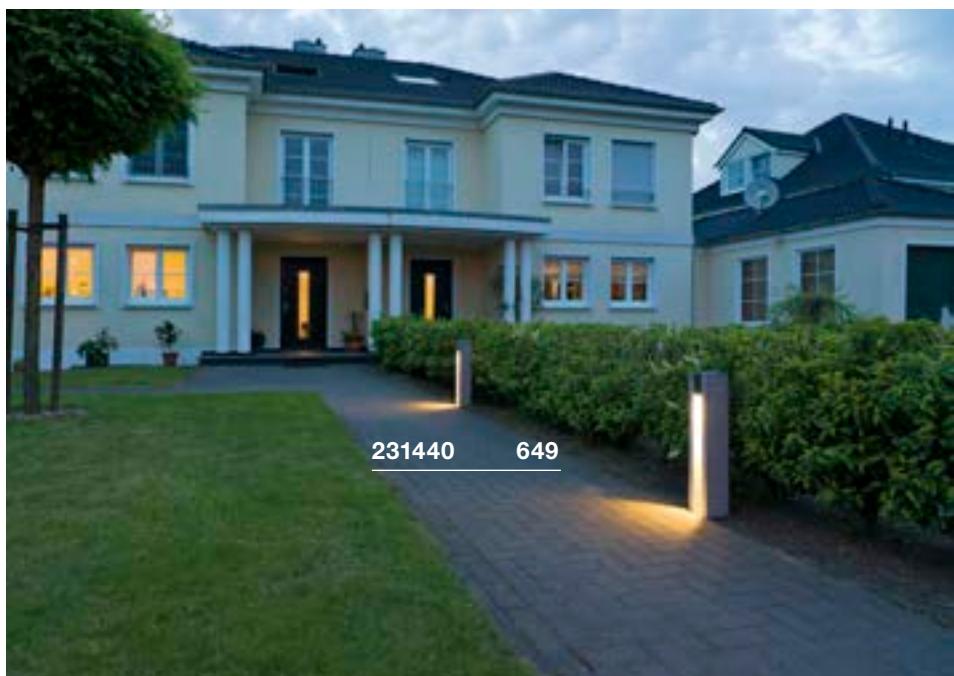



ARROCK STONE 50
Pole


ARROCK STONE 75
Pole

ARROCK SLOT
Pole, QPAR51


220-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/stainless steel 304



220-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/stainless steel 304



220-240V ~50/60Hz
Material: granite/stainless steel 304
• Open cable end



CRI 80

Down

330lm | 3000K



CRI 80

Down

330lm | 3000K



Base: 1xGU10

Options
 grey

Prod. no.
231370

Options
 grey

Prod. no.
231371

Options
 grey

Prod. no.
231440

Product
Ground spike
 grey

Prod. no.
231233

Product
Ground spike
 grey

Prod. no.
231233


Product
Ground spike
 grey
Connection box IP68, 3-pole
 black


LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005076



L-LINE OUT 30
FL, vertical



220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end



Down 800lm | 3000K | 810lm | 4000K



Options	Prod. no.
● anthracite	1003536



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730



L-LINE OUT 60 FL, vertical



220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end





Down 780lm | 3000K | 800lm | 4000K

Options	Prod. no.
● anthracite	1003535



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

L-LINE OUT 50 Pole, horizontal



220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end





Down 490lm | 3000K | 530lm | 4000K

Options	Prod. no.
● anthracite	1003537



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

L-LINE OUT 80 Pole, horizontal



220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

- The light colour must be set prior to installation
- Open cable end



Down 490lm | 3000K | 530lm | 4000K



Options	Prod. no.
● anthracite	1003538



Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

THEO PATHLIGHT

Pole, double



220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <7 W

Base: 2xGU10


Options	Prod. no.
● anthracite	1002871

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077





Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730


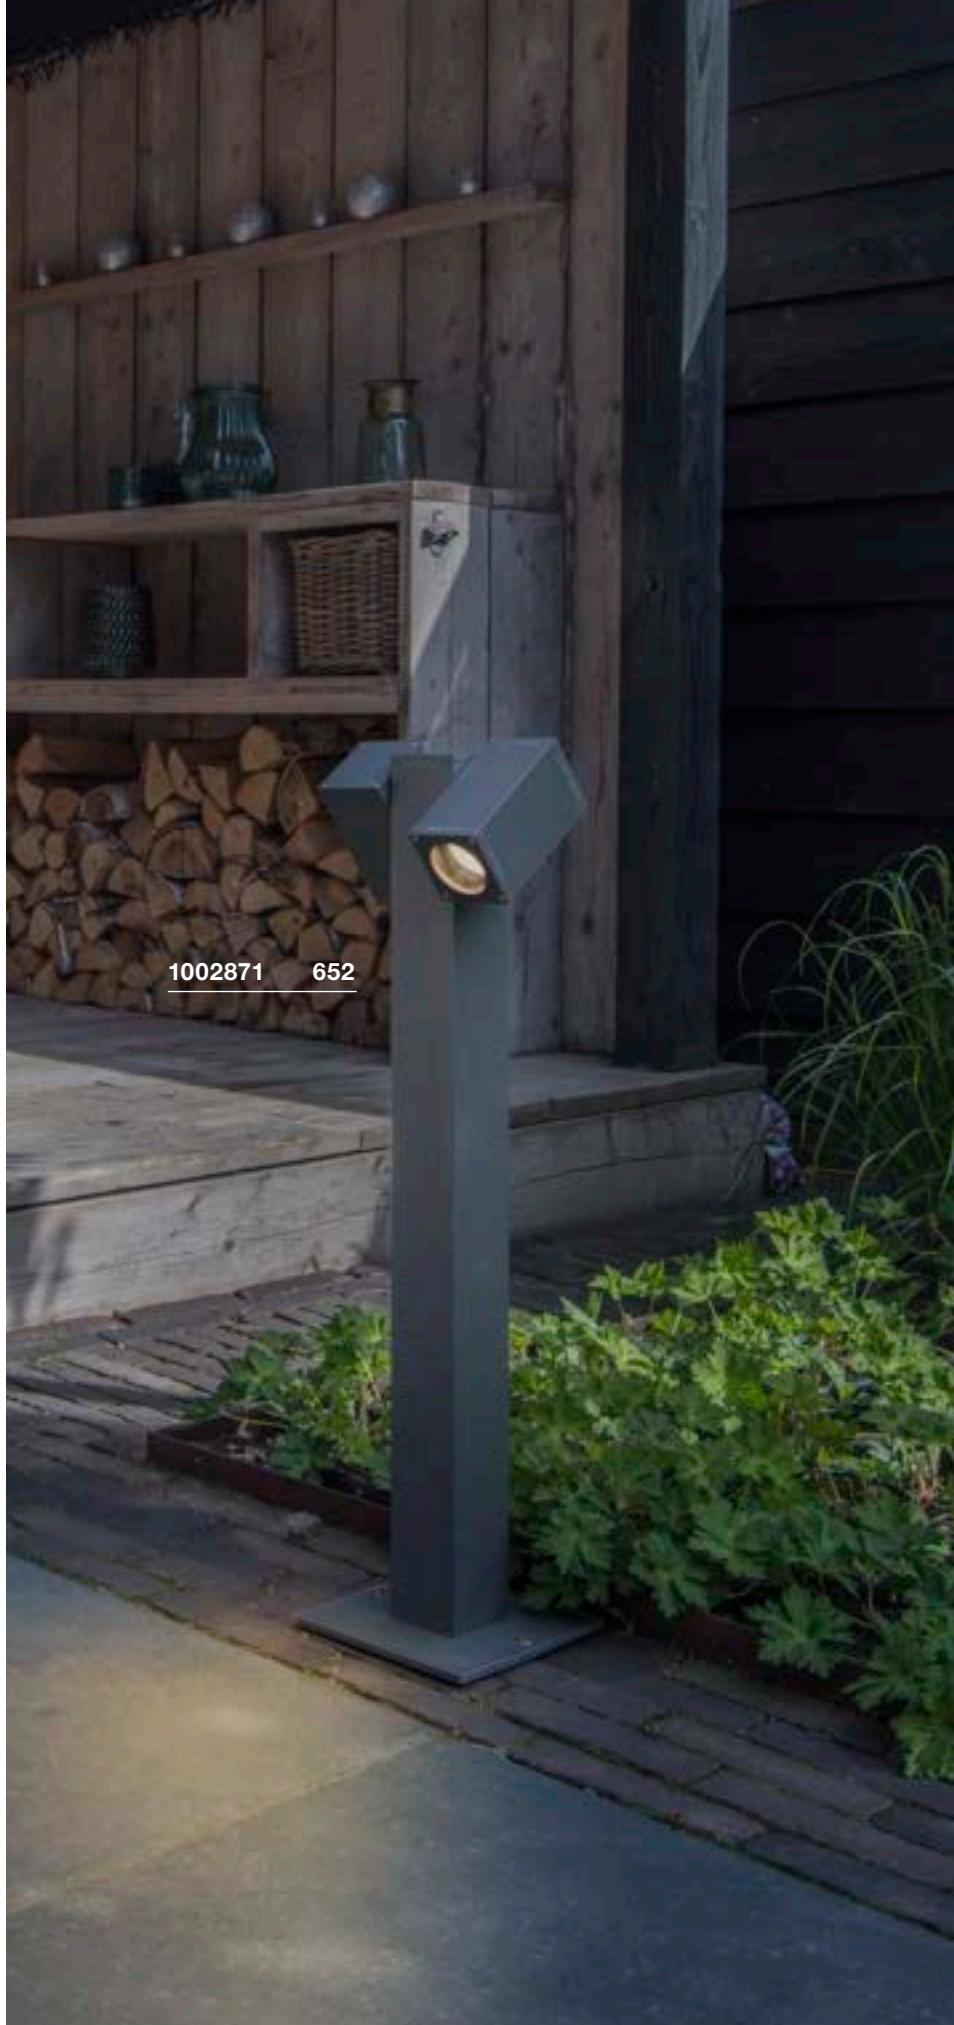




1004680 653

OVALISK 75
Pole


220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass

OVALISK 100
Pole


220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass



Down 580lm | 3000K | 630lm | 4000K



Down 580lm | 3000K | 630lm | 4000K

Options	Prod. no.
● anthracite	1004680

Options	Prod. no.
● anthracite	1004681




Product	Prod. no.
Concrete anchor	
● silver	228712
Ground spike	
● grey	228722
Connection box IP68, 3-pole	
● black	228730







1002000 **655**

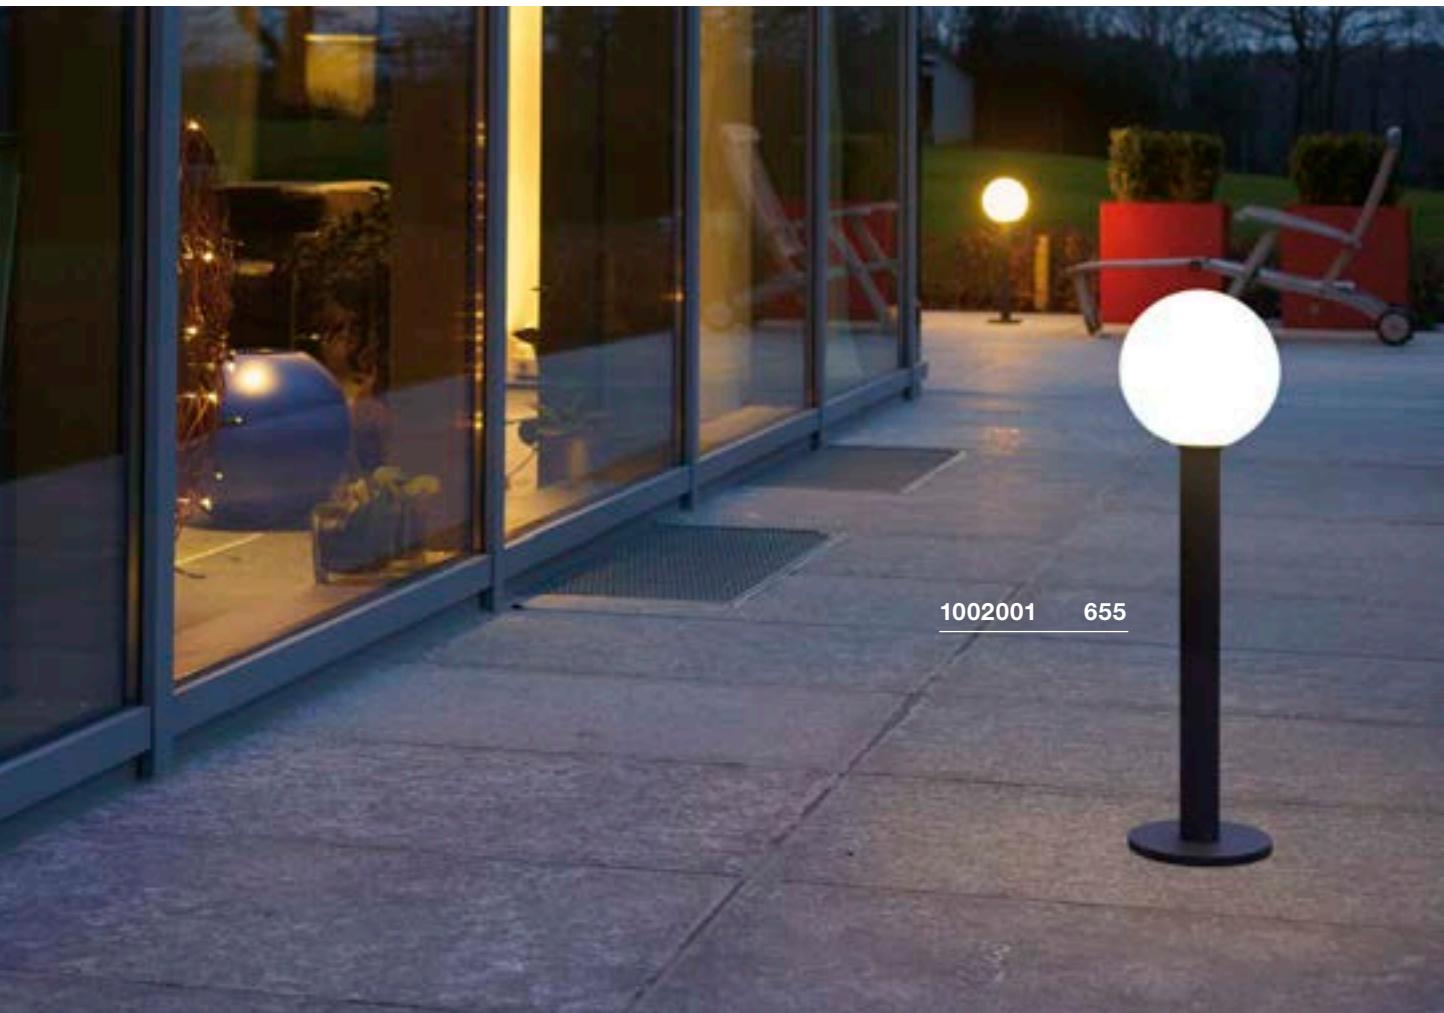

1002001 **655**



GLOO PURE 27
Pole, E27



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 18 cm

Options	Prod. no.
● anthracite	1001999



| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h


Prod. no.: 1005307



Product	Prod. no.
Ground spike	
● grey	231234

Connection box IP68, 3-pole
● black 228730

GLOO PURE 44
Pole, E27



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 18 cm

Options	Prod. no.
● anthracite	1002000



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h



Prod. no.: 1005289



Product	Prod. no.
Ground spike	
● grey	231234

Connection box IP68, 3-pole
● black 228730

GLOO PURE 70
Pole, E27



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



Base: 1xE27 Max. diameter: 4.8 cm L: 18 cm

Options	Prod. no.
● anthracite	1002001



LED E27 | 8W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no.: 1005307



Product	Prod. no.
Ground spike	
● grey	231234

Connection box IP68, 3-pole
● black 228730





227219 657

227221 657



ROTOBALL 25 FL, E27



220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 contour plug




Base: 1xE27

Options	Prod. no.
<input type="radio"/> white	227219



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 safety plug



Base: 1xE27

Max. diameter: 9.5 cm

Options	Prod. no.
<input type="radio"/> white	227220





LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



ROTOBALL 50 FL, E27



220-240V ~50/60Hz
Material: steel/polyethylene (PE)

- IP44 safety plug



Base: 1xE27

Max. diameter: 9.5 cm



Options	Prod. no.
<input type="radio"/> white	227221



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no.: 1005303



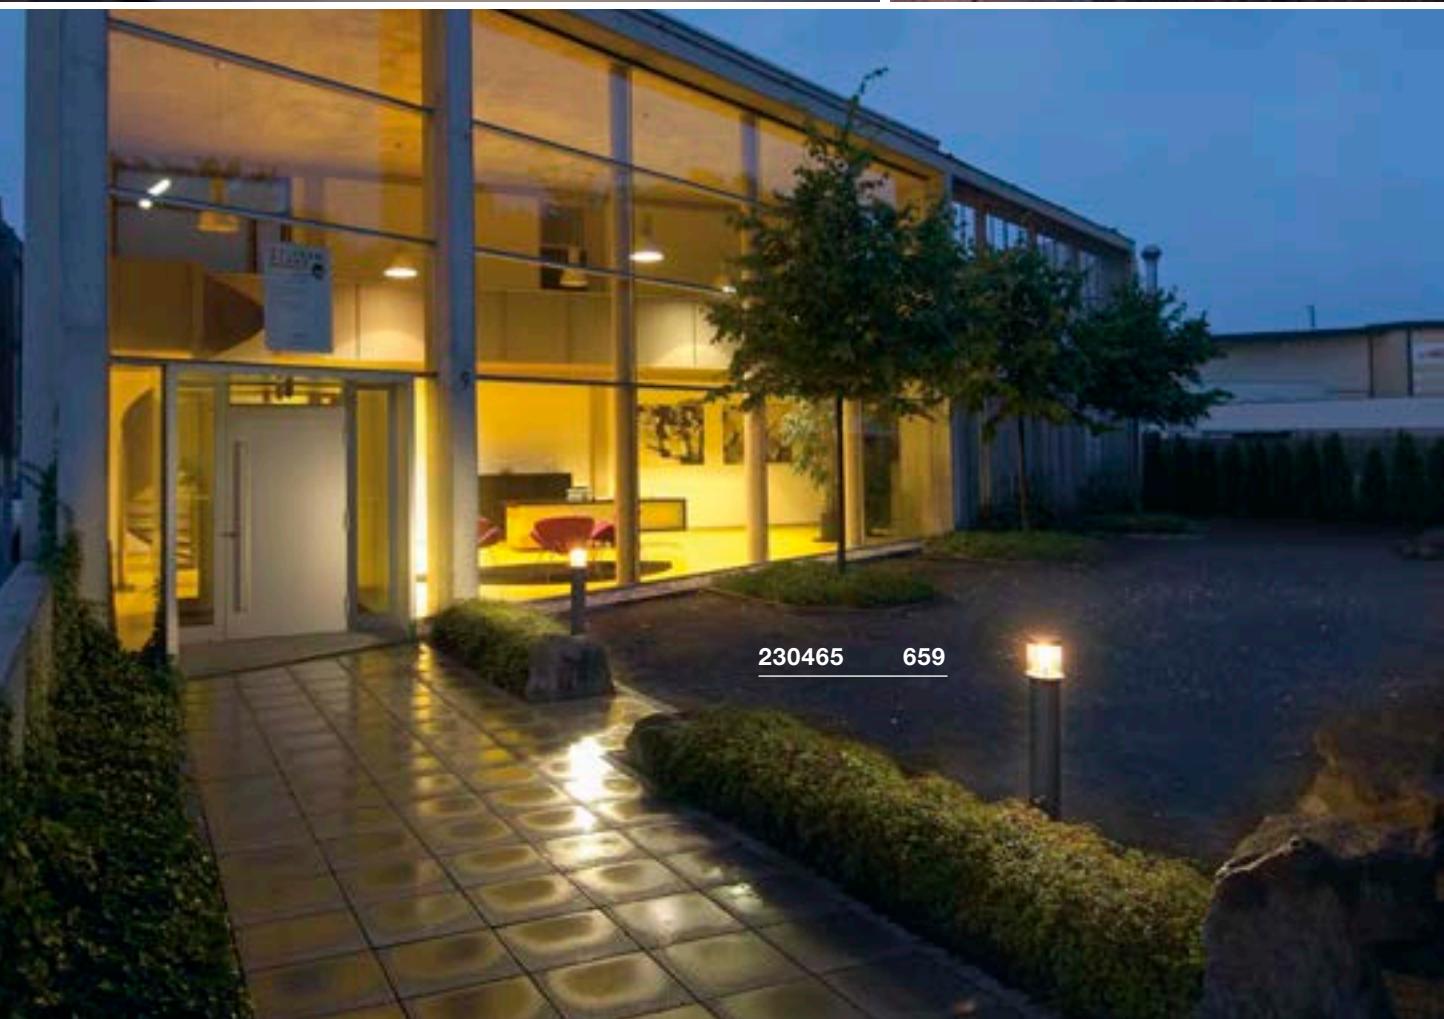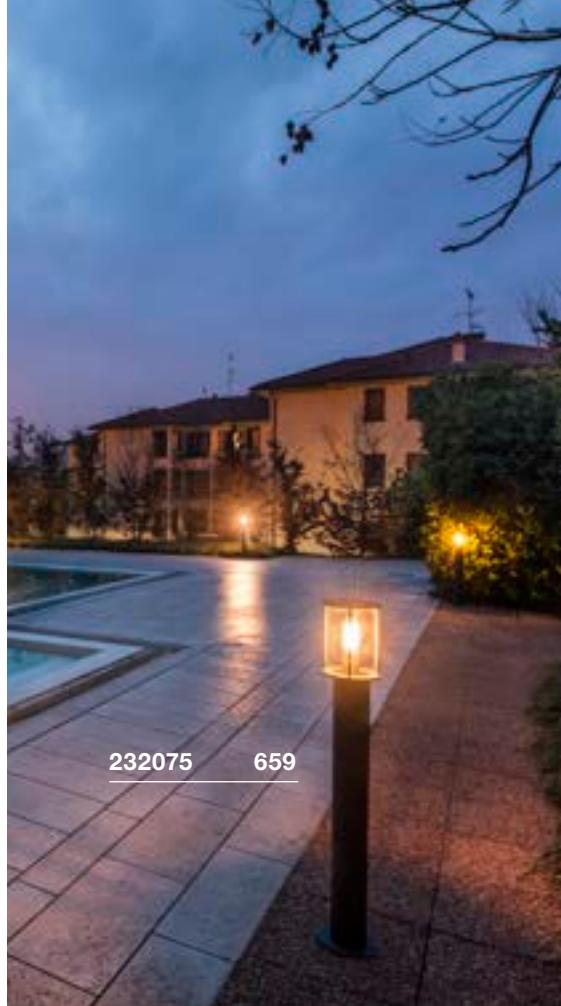



PHOTONIA
PD, E27

PHOTONIA
Pole, E27

OTOS GLAS
Pole, E27



220-240V ~50/60Hz
Material: aluminium/glass

- Suspension chain included
- IP44 safety plug



220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end



220-240V ~50/60Hz
Material: aluminium/glass

- Concrete anchor included



Base: 1xE27 Max. diameter: 9 cm L: 15 cm

Options	Prod. no.
● anthracite	232065



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005268



Base: 1xE27 Max. diameter: 9 cm L: 15 cm

Options	Prod. no.
● anthracite	232075



LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no.: 1005265



Base: 1xE27 Max. diameter: 6.5 cm L: 14.5 cm

Options	Prod. no.
● anthracite	230465



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



Product	Prod. no.
Ceiling rosette	1000398

● anthracite



Product	Prod. no.
Concrete anchor	232085

● Stainless steel

Product	Prod. no.
Connection box IP68, 3-pole	228730

● black



Product	Prod. no.
Screw set	228753

● Stainless steel



Product	Prod. no.
Connection box IP68, 3-pole	228730

● black

CUBIX
FL, QPAR51



CONE
FL, E27



220-240V ~50/60Hz
Material: aluminium/glass

• IP44 safety plug



Base: 1xGU10


Options	Prod. no.
● anthracite	132835



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077



220-240V ~50/60Hz
Material: aluminium/glass

Base: 1xE27 max. L: 15 cm


Options	Prod. no.
● anthracite	230435



LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h



Prod. no.: 1005265

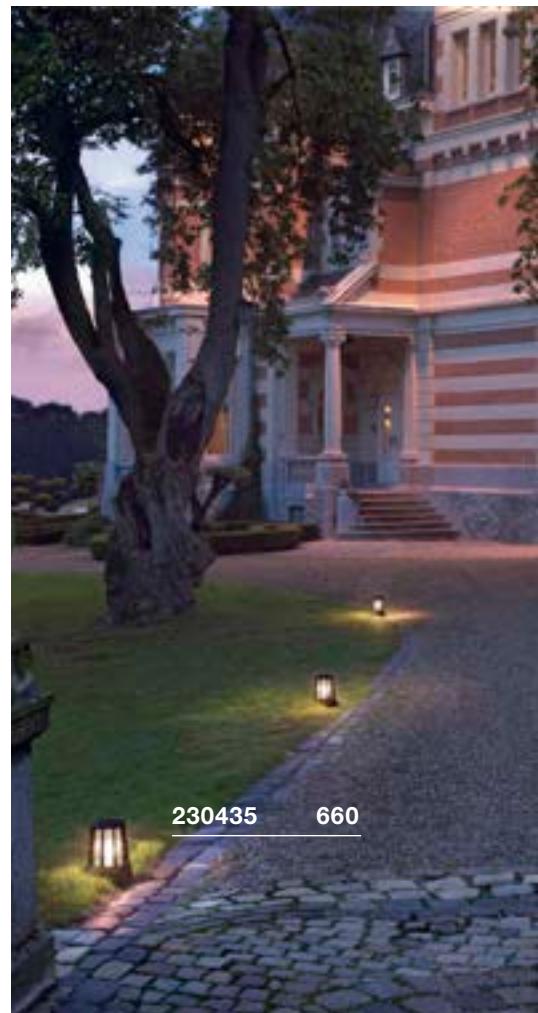



MOLAT
PD, E27



1000821 661



MOLAT
Pole, E27



1000822 661



220-240V ~50/60Hz
Material: aluminium/glass

- Suspension chain included
- IP44 safety plug



Base: 1xE27 Max. diameter: 6.5 cm L: 14.5 cm

Options	Prod. no.
● anthracite	1000821




LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: **1005268**



Product	Prod. no.
Ceiling rosette ● anthracite	1000398



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xE27 Max. diameter: 6.5 cm L: 14.5 cm

Options	Prod. no.
● anthracite	1000822





LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no.: **1005265**





Product	Prod. no.
Ground spike ● grey	2300060

LISENNE 40
Pole, E27




220-240V ~50/60Hz
Material: basalt/glass

LISENNE 70
Pole, E27



220-240V ~50/60Hz
Material: basalt/glass

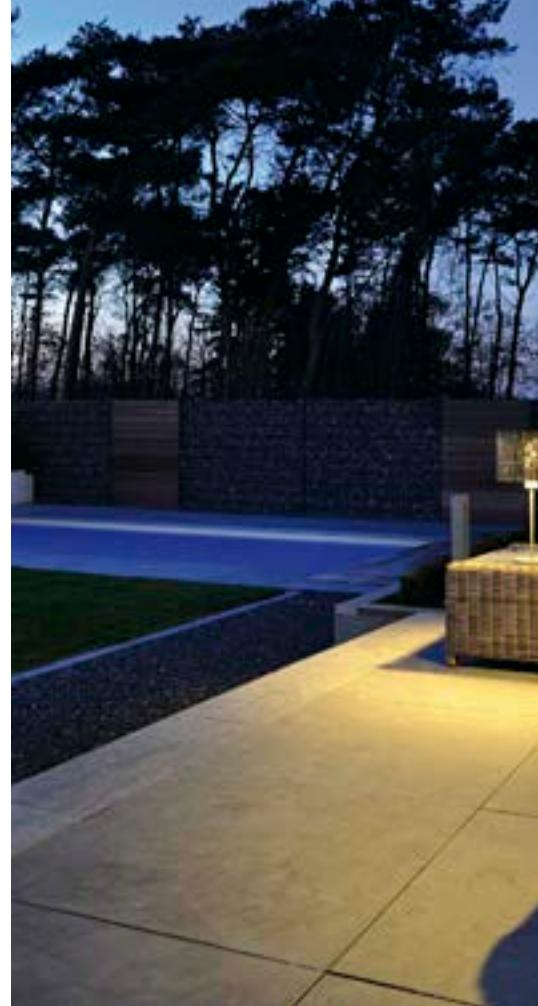

SOCKET INSIDE <23 W

Base: 1xE27 Max. diameter: 5.9 cm L: 15 cm

Options	Prod. no.
● grey	1000665



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005268

SOCKET INSIDE <23 W

Base: 1xE27 Max. diameter: 5.9 cm L: 15 cm

Options	Prod. no.
● grey	1000666



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h


Prod. no.: 1005268



Product	Prod. no.
Ground spike ● grey	229422



228965 663

ADEGAN MANILA
FL, E27ADEGAN
FL, E27

220-240V ~50/60Hz
Material: granite/stainless steel

- IP44 safety plug

SOCKET INSIDE <15 W


Base: 1xE27 Max. diameter: 4.8 cm L: 18 cm

Options	Prod. no.
● stainless steel/anthracite	1002494



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- IP44 safety plug

SOCKET INSIDE <24 W

Base: 1xE27 Max. diameter: 5.2 cm

Options	Prod. no.
● anthracite	228965



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Ground spike ● anthracite	228960



228935 665





228925 665





ALPA MUSHROOM 45
Pole, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 5.2 cm L: 16 cm

Options	Prod. no.
● anthracite	228935



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h





Prod. no.: 1005289



Product	Prod. no.
Concrete anchor	
● silver	228712
Ground spike	
● grey	228722
Connection box IP68, 3-pole	
● black	228730

ALPA MUSHROOM 75
Pole, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 5.2 cm L: 16 cm

Options	Prod. no.
● anthracite	228945



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h





Prod. no.: 1005289



Product	Prod. no.
Concrete anchor	
● silver	228712
Ground spike	
● grey	228722
Connection box IP68, 3-pole	
● black	228730

ALPA CONE 100
Pole, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- Open cable end



Base: 1xE27 Max. diameter: 5.2 cm L: 17.5 cm

Options	Prod. no.
● anthracite	228925



| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h





Prod. no.: 1005307



Product	Prod. no.
Concrete anchor	
● silver	228712
Ground spike	
● grey	228722
Connection box IP68, 3-pole	
● black	228730

APONI 90
Pole, PHASE



220-240V ~50/60Hz | 500mA
Total wattage: 6.3W
Material: aluminium

- Open cable end



Down 520lm | 3000K



Options	Prod. no.
● anthracite	1000682



Product	Prod. no.
Connection box IP68, 3-pole	

● black 228730

APONI 120
Pole, PHASE



220-240V ~50/60Hz | 500mA
Total wattage: 6.3W
Material: aluminium

- Open cable end



Down 520lm | 3000K

Options	Prod. no.
● anthracite	1000683



Product	Prod. no.
Connection box IP68, 3-pole	

● black 228730







TRUST 30 Pole



TRUST 60 Pole



Options	Prod. no.
● Stainless steel	228100

Options	Prod. no.
● Stainless steel	228110





Product	Prod. no.
Ground spike	
● black	227922
Ring-shaped grid	
● Stainless steel	228130
Connection box IP68, 3-pole	
● black	228730

Product	Prod. no.
Ground spike	
● black	227922
Ring-shaped grid	
● Stainless steel	228130
Connection box IP68, 3-pole	
● black	228730

BIG NAILS 50
POLE, E27



BIG NAILS 80
POLE, E27



220-240V ~50/60Hz
Material: stainless steel 304/
polycarbonate (PC)



Base: 1xE27 Max. diameter: 4.5 cm L: 17 cm

Options	Prod. no.
● Stainless steel	229162



LED E27 | 8W | 240°
3000K | 880lm | EEEK=E
8kWh/1000h

Prod. no.: 1005289



220-240V ~50/60Hz
Material: stainless steel 304/
polycarbonate (PC)



Base: 1xE27 Max. diameter: 4.5 cm L: 17 cm

Options	Prod. no.
● Stainless steel	229172




| 13.5W | 240°
3000K | 1520lm | EEEK=E
14kWh/1000h

Prod. no.: 1005307



Product	Prod. no.
Ground spike ● black	227922

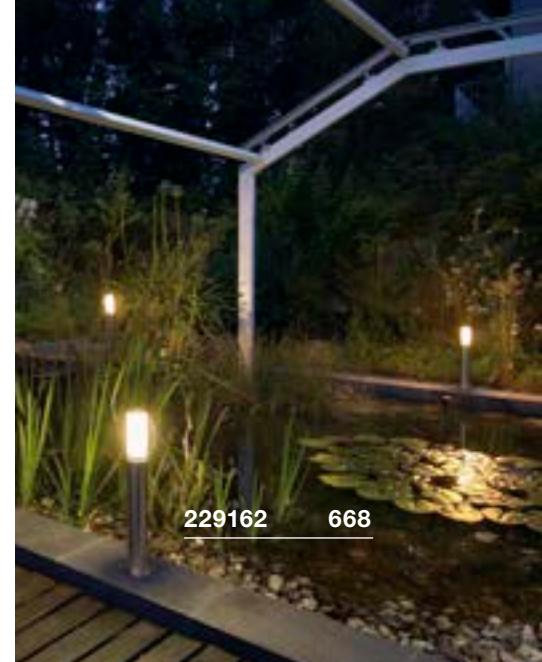

229162 668





229172 668



1001490 669



ROX ACRYL 30 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304




Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1001488



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



220-240V ~50/60Hz
Material: stainless steel 304




Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1001489



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1001490



| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no.: 1005307



Product	Prod. no.
Concrete anchor	
● Stainless steel	1001494
Ground spike	
● grey	231234
T-connector box	
● black	228726



Product	Prod. no.
Concrete anchor	
● Stainless steel	1001494
Ground spike	
● grey	231234
T-connector box	
● black	228726



Product	Prod. no.
Concrete anchor	
● Stainless steel	1001494
Ground spike	
● grey	231234
T-connector box	
● black	228726




230066 671



23006 671



VAP SLIM 30 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 5.1 cm L: 12.6 cm

Options	Prod. no.
● Stainless steel	230063




LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Concrete anchor	
● Stainless steel	230061
Ground spike	
● grey	230060

VAP SLIM 60 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 5.1 cm L: 12.6 cm

Options	Prod. no.
● Stainless steel	230066




LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290



Product	Prod. no.
Concrete anchor	
● Stainless steel	230061
Ground spike	
● grey	230060

VAP SLIM 90 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 5.1 cm L: 12.6 cm

Options	Prod. no.
● Stainless steel	230069



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289






Product	Prod. no.
Concrete anchor	
● Stainless steel	230061
Ground spike	
● grey	230060

C-POL
POLE, E27



F-POL
POLE, E27




220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)



Base: 1xE27 Max. diameter: 5.2 cm L: 17.3 cm

Options	Prod. no.
● anthracite	231475




220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)




Base: 1xE27 Max. diameter: 5.1 cm L: 14.8 cm

Options	Prod. no.
● anthracite	231595

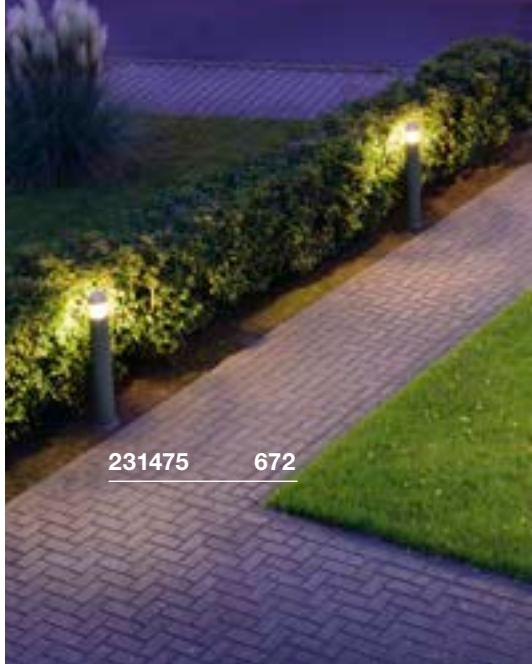

231475 672

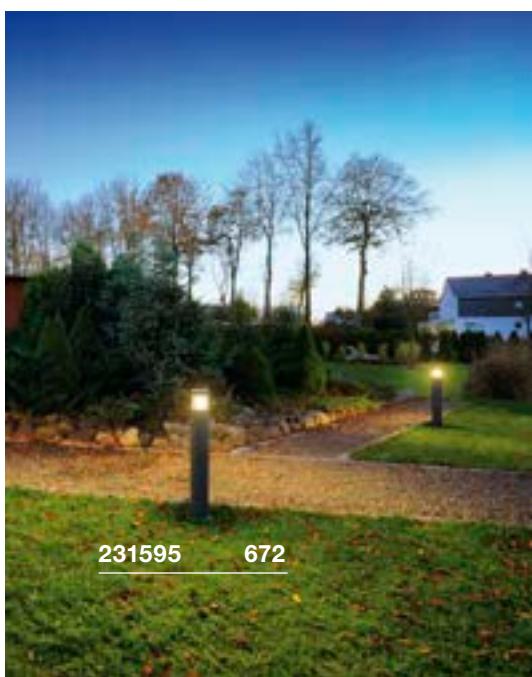

231595 672




| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no.: 1005307




| LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h


Prod. no.: 1005289

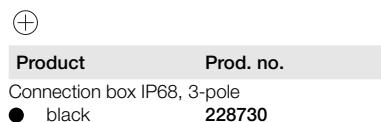

Product Prod. no.
Connection box IP68, 3-pole
● black 228730

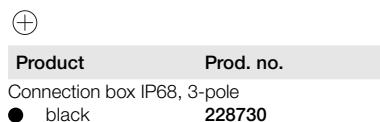



Product Prod. no.
Connection box IP68, 3-pole
● black 228730

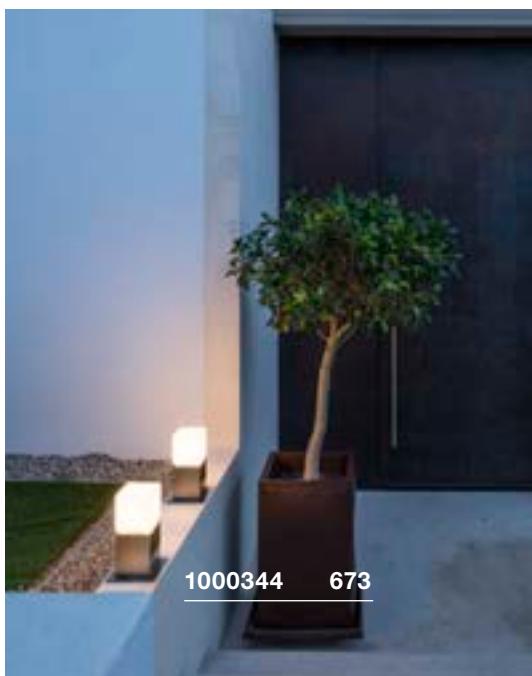

1000344 673



SQUARE POLE 30 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1000344


LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



Product	Prod. no.
Concrete anchor	
● Stainless steel	1000343
Ground spike	
● grey	231234
Connection box IP68, 3-pole	
● black	228730

SQUARE POLE 60 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1000345



| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no.: 1005307



Product	Prod. no.
Concrete anchor	
● Stainless steel	1000343
Ground spike	
● grey	231234
Connection box IP68, 3-pole	
● black	228730

SQUARE POLE 90 Pole, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 6 cm L: 15 cm

Options	Prod. no.
● Stainless steel	1000346

| 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h




Prod. no.: 1005307



Product	Prod. no.
Concrete anchor	
● Stainless steel	1000343
Ground spike	
● grey	231234
Connection box IP68, 3-pole	
● black	228730




231455 675

SLOTS 45
PoleSLOTS 65
Pole

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- Concrete anchor included



220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- Concrete anchor included



Down



200lm | 3000K



Down




200lm | 3000K

Options	Prod. no.
● anthracite	231815
● rust	231817

Options	Prod. no.
● anthracite	231455
● rust	231457

H-POL 30 Pole



100-277V ~50/60Hz | 480mA
Total wattage: 9.7W
Material: aluminium/plastic

- This product is intended for in-floor installation
- A larger recessed fixing kit is available for optional installation in the ground.
Installation dimensions
L: 14cm W: 14cm D: 16cm




Down 350lm | 3000K

Options	Prod. no.
● anthracite	232155



Product	Prod. no.
Recessed fixing kit 14x14 cm	
● black	232195

H-POL 60 Pole



100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/plastic

- This product is intended for in-floor installation.
- A larger recessed fixing kit is available for optional installation in the ground.
Installation dimensions
L: 14cm W: 14cm D: 16cm




Down 700lm | 3000K

Options	Prod. no.
● anthracite	232165



Product	Prod. no.
Recessed fixing kit 14x14 cm	
● black	232195

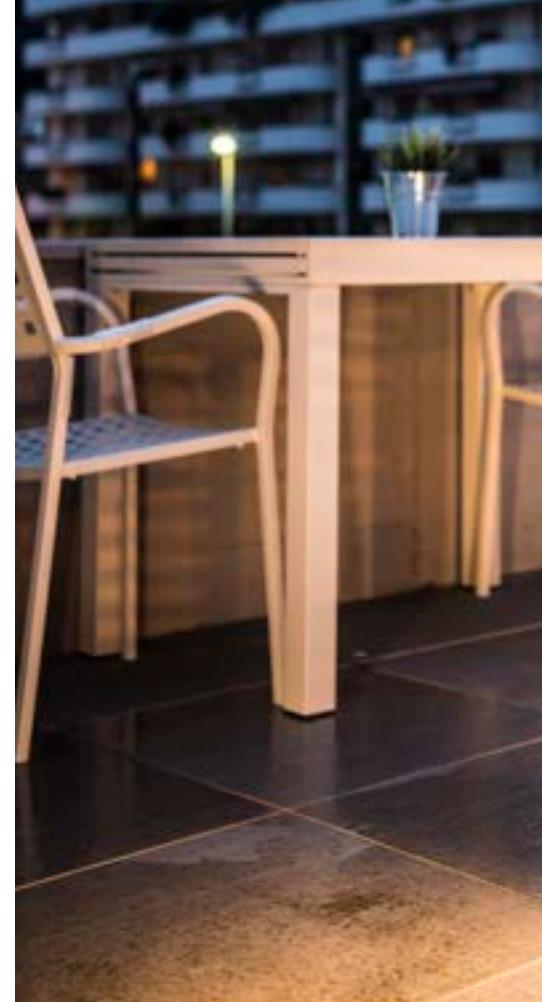

232155 **676**










H-POL TWIN 30 Pole



H-POL TWIN 60 Pole




100-277V ~50/60Hz | 500mA

Total wattage: 18W

Material: aluminium/plastic

- This product is intended for in-floor installation.
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions
L: 14cm W: 14cm D: 16cm



220-240V ~50/60Hz | 1000mA

Total wattage: 35W

Material: aluminium/plastic

- This product is intended for in-floor installation.
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions
L: 14cm W: 14cm D: 16cm



Down 350lm | 3000K




Down 700lm | 3000K

Options	Prod. no.
● anthracite	232175

Options	Prod. no.
● anthracite	232185

Product	Prod. no.
Recessed fixing kit 14x14 cm	
● black	232195

Product	Prod. no.
Recessed fixing kit 14x14 cm	
● black	232195

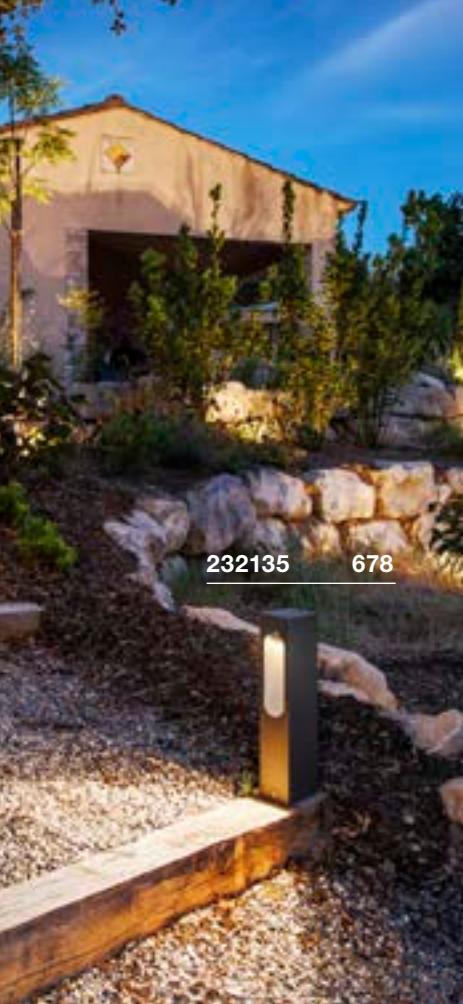


SLOTBOX 40
Pole



SLOTBOX 70
Pole



232145 678



100-277 V ~50/60 Hz | 700 mA
Total wattage: 8W
Material: aluminium


- Open cable end



Down 160lm | 3000K

Options	Prod. no.
● anthracite	232135

Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730



100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.7W
Material: aluminium

- Open cable end






Down 160lm | 3000K

Options	Prod. no.
● anthracite	232145

Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730



**FLATT 65
POLE**

1002957 679
**FLATT 100
POLE**


100-240V ~50/60Hz | 350mA

Total wattage: 10W

Material: aluminium/aluminium



100-240V ~50/60Hz | 350mA

Total wattage: 10W

Material: aluminium/aluminium

- Light colour can be selected using the switch inside the housing prior to installation



Down 400lm | 3000K 400lm | 4000K



Down 400lm | 3000K 400lm | 4000K

Options	Prod. no.
● anthracite	1002956
● brown/anthracite	1002957

Options	Prod. no.
● anthracite	1002958
● brown/anthracite	1002959






Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730



Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730


1002958 679


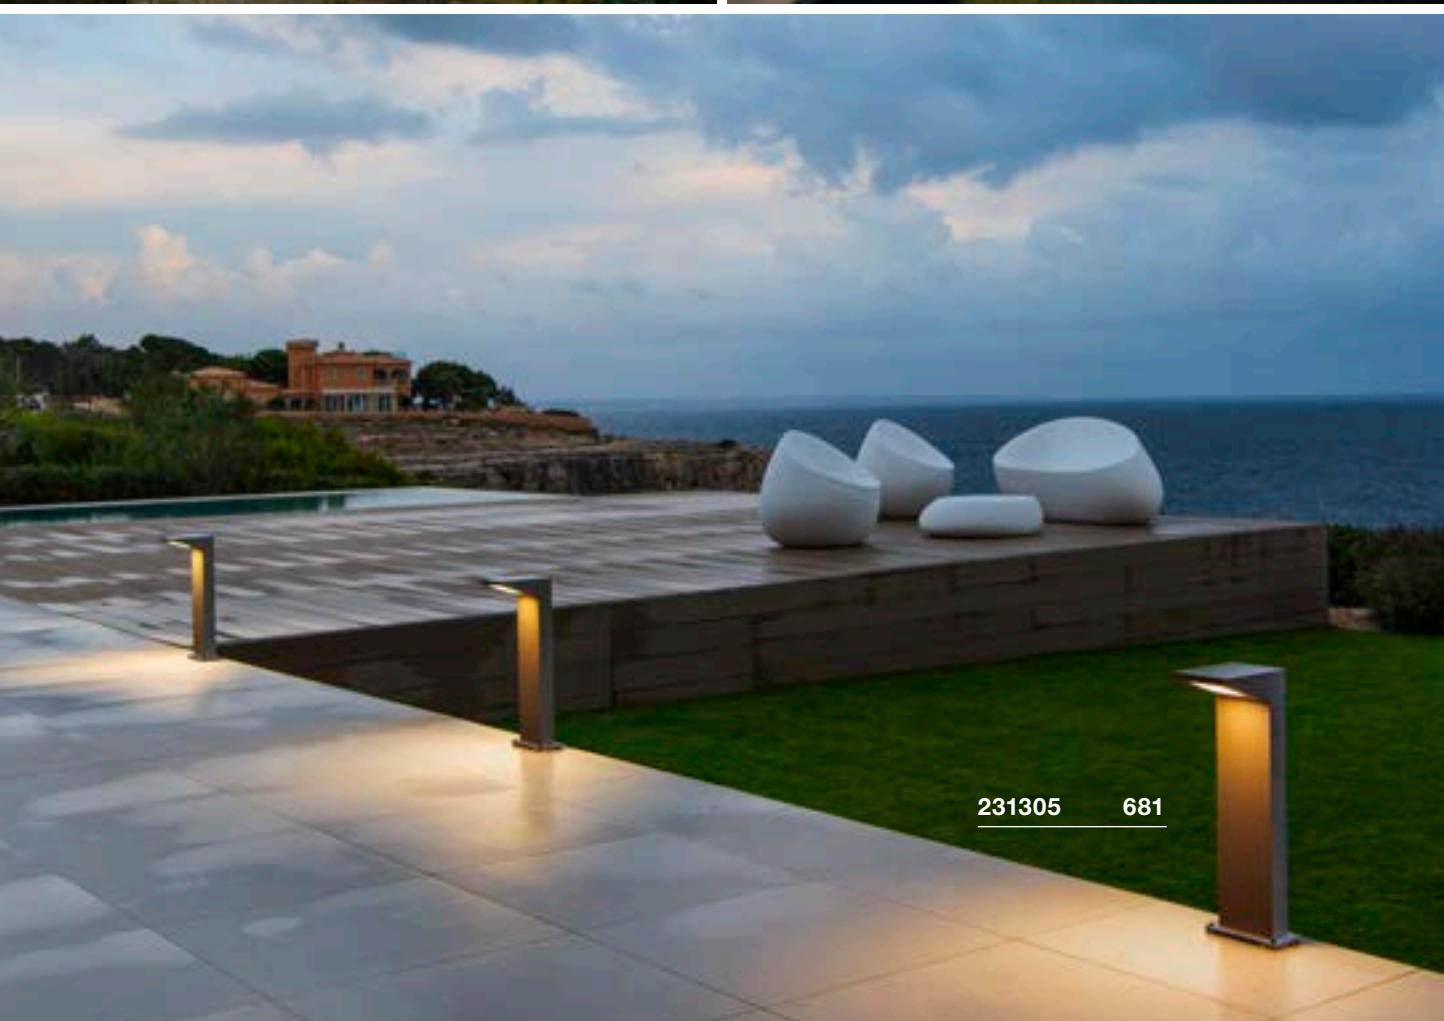



ABRIDOR 60
Pole


100-240V ~50/60Hz | 300mA

Total wattage: 12W


Material: aluminium

ABRIDOR 100
Pole


100-240V ~50/60Hz | 300mA

Total wattage: 12W

Material: aluminium

IPERI 50
Pole


220-240V ~50/60Hz

Total wattage: 4.5W

Material: aluminium/plastic

CRI
80

Down 950lm | 3000K | 980lm | 4000K

CRI
80

Down 950lm | 3000K | 980lm | 4000K

CRI
80

Down 400lm | 4000K

Options	Prod. no.
● anthracite	1002991


Options	Prod. no.
● anthracite	1002992

Options	Prod. no.
● anthracite	231305



Product	Prod. no.
Ground spike	231231

QUADRASYL 75 Pole, TCR-TSE



220-240V ~50/60Hz
Material: aluminium

- Concrete anchor included
- Open cable end

SOCKET **<11**
INSIDE W

Base: 1xG53 Max. diameter: 7.5 cm L: 2.7 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	232295
<input type="radio"/> grey	232294



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h



Prod. no.: 1005271



Product	Prod. no.
T-connector box	
<input checked="" type="radio"/> black	228726




232295 682



QUAD POLE
Pole



BOOKAT
Pole

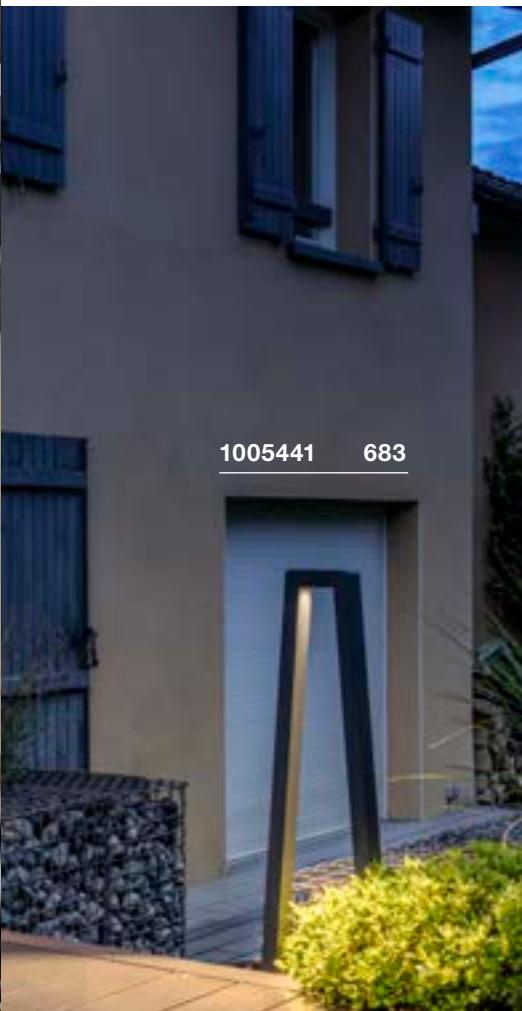CRI
80

Down

1550lm | 3000K

CRI
80

Down

1240lm | 3000K

1300lm | 4000K



Options	Prod. no.
● anthracite	1003001

Options	Prod. no.
● anthracite	1005441



Product	Prod. no.
Connection box IP68, 3-pole	
● black	228730

RASCALI 45
Pole



220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium



Down

360lm | 3000K





Down

360lm | 3000K

Options	Prod. no.
● anthracite	1000799

Options	Prod. no.
● anthracite	1000801

RASCALI 65
Pole



220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

1000799 684



1000801 684




231505 685



MYRA SPOT
Double, GU10




SITRA 360
Pole, TCR-TSE



220-240V ~50/60Hz
Material: aluminium

- The height of the light can be increased by a maximum of 2 extension rods.
- Open cable end



220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE	
<4.5 W	

Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

SOCKET INSIDE	
<9 W	

Base: 2xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
● anthracite	233185

	LED GU10 51mm 6W 38° 2700K 450lm EEK=F 6kWh/1000h	
	Prod. no.: 1005075	

Product	Prod. no.
Concrete anchor	
● silver	228712
Screw set	
● Stainless steel	228752
Pedestal	
● anthracite	233145
Extension rod 30cm	
● anthracite	233165

Options	Prod. no.
● anthracite	231505

	LED GX53 6.1W 120° 3000K 490lm EEK=G 6kWh/1000h	
	Prod. no.: 1005271	

Product	Prod. no.
Ground spike	
● grey	230060





1001962 697



LED
SYNA PLANT | 689



LED
SYNA GARDEN | 689



LED
SYNA | 689



LED
FLOODI S | 691



LED
FLOODI M | 691



LED
FLOODI L | 691



LED
GALEN 60 | 692



LED
GALEN 120 | 692



LED
FLAC BEAM® | 693



SOCKET
SAMRINA | 693



SOCKET
NAUTILUS 10 | 694



SOCKET
BIG NAUTILUS | 694



SOCKET
NAUTILUS 10 | 695



LED
NAUTILUS 10 | 696



SOCKET
NAUTILUS | 697



SOCKET
NAUTILUS 10 SPOT LED | 697



LED
DASAR® PROJECTOR | 698



LED
DASAR® 920 | 698



LED
HELIA SPOT S | 699



LED
HELIA SPOT L | 699



SOCKET
THEO BRACKET | 701



LED
LED SPIKE | 701




SOCKET
SITRA 360 SPIKE | 703



SOCKET
SITRA 360 SPIKE | 703





227505 **689**

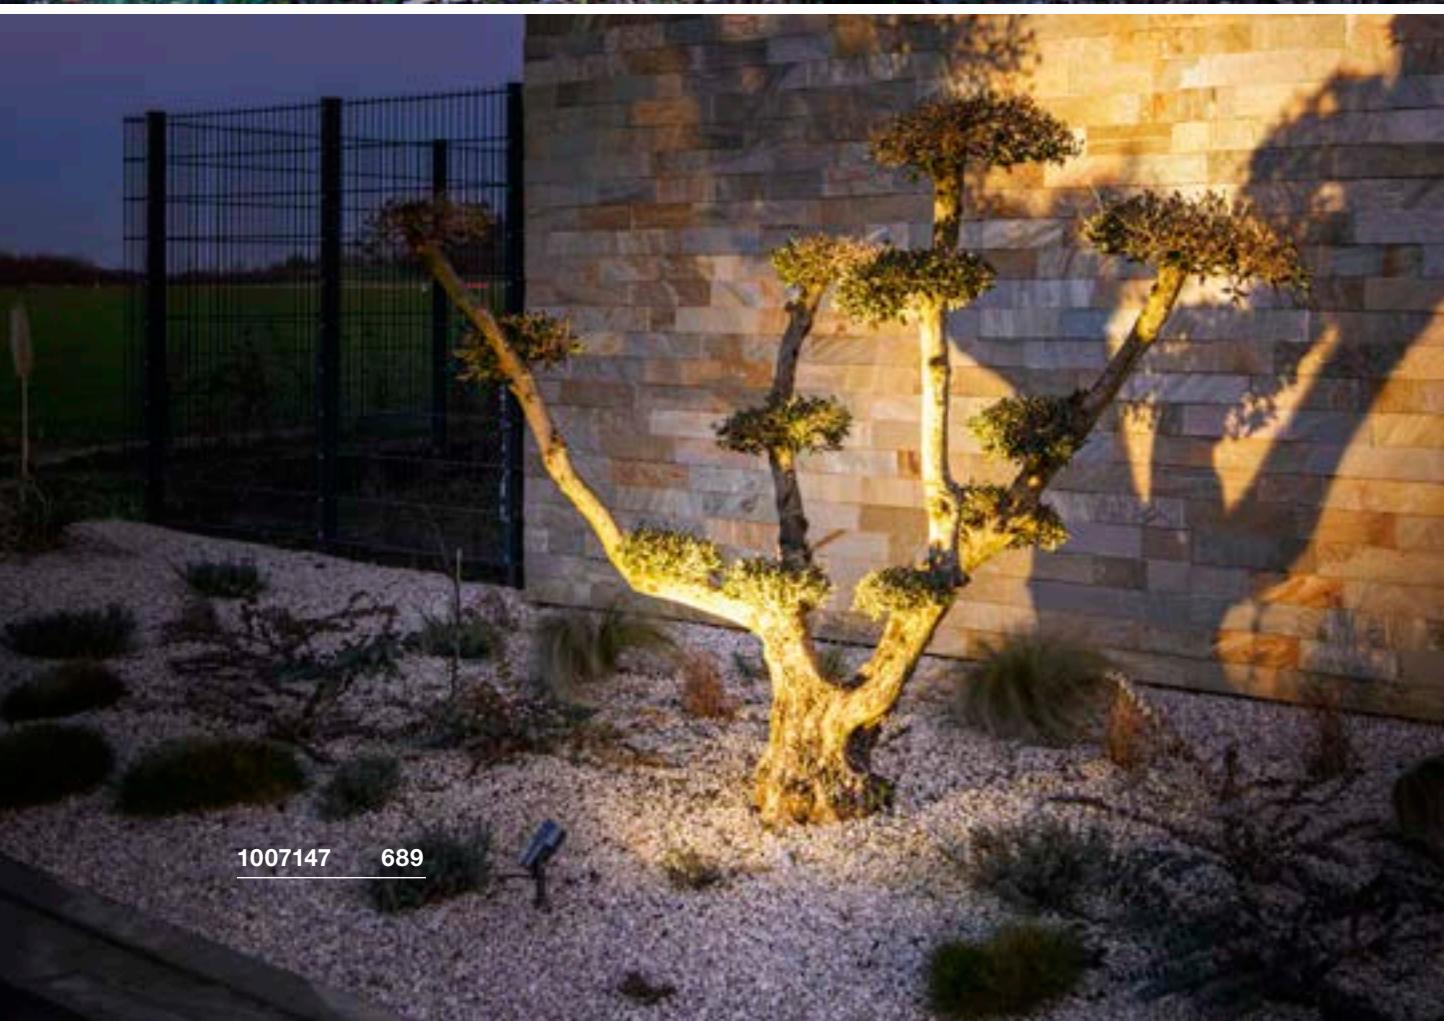

1007147 **689**



SYNA PLANT SP





220-240V ~50/60Hz | 250mA

Total wattage: 6W

Material: aluminium

- IP44 safety plug

SYNA GARDEN SP





220-240V ~50/60Hz | 250mA

Total wattage: 6W

Material: aluminium

- IP44 safety plug

SYNA SP



220-240V ~50/60Hz

Total wattage: 9W

Material: aluminium/acrylic

- IP44 safety plug



Down



540lm | 3000K



Down



540lm | 3000K



Down



470lm | 3000K

Options	Prod. no.
● black	1007146

Options	Prod. no.
● black	1007147

Options	Prod. no.
● anthracite	227505





A photograph of a residential street at dusk or night. On the right, a large two-story house made of light-colored brick has its garage door illuminated from within, casting a warm glow. A small, dark dog stands on the paved driveway in front of the garage. To the left, a row of smaller, modern houses with white facades and dark-framed windows are visible. A set of concrete steps leads up to the entrance of one of these houses. The sky is a deep blue, suggesting it's either nighttime or the photo was taken during twilight.

1006193 691



FLOODI S SP



220-240V ~50/60Hz
Total wattage: 9.3W
Material: aluminium



Down

1040lm | 3000K



Down

2980lm | 3000K



Down

5150lm | 3000K

Options	Prod. no.
● anthracite	1006191

Options	Prod. no.
● anthracite	1006192

Options	Prod. no.
● anthracite	1006193



Product	Prod. no.
Sensor ● black	1006326





Product	Prod. no.
Sensor ● black	1006326



Product	Prod. no.
Sensor ● black	1006326

FLOODI M SP



220-240V ~50/60Hz
Total wattage: 30W
Material: aluminium



Down

2980lm | 3000K



Down

5150lm | 3000K

Options	Prod. no.
● anthracite	1006192

Options	Prod. no.
● anthracite	1006193





Product	Prod. no.
Sensor ● black	1006326



Product	Prod. no.
Sensor ● black	1006326

FLOODI L SP



220-240V ~50/60Hz
Total wattage: 48W
Material: aluminium



Down

5150lm | 3000K

Options	Prod. no.
● anthracite	1006193

Options	Prod. no.
● anthracite	1006193



Product	Prod. no.
Sensor ● black	1006326





Product	Prod. no.
Sensor ● black	1006326

GALEN 60 SP



GALEN 120 SP



220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: aluminium/glass



220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: aluminium/glass



Down 1570lm | 3000K | 1570lm | 4000K

Options	Prod. no.
● anthracite	1003447



Down 3000lm | 3000K | 3100lm | 4000K

Options	Prod. no.
● anthracite	1003448




Product	Prod. no.
5m connection cable with open cable end	
● black	231960
Connection cable 1.0m	
● black	231961

Product	Prod. no.
5m connection cable with open cable end	
● black	231960
Connection cable 1.0m	
● black	231961







FLAC BEAM® SP

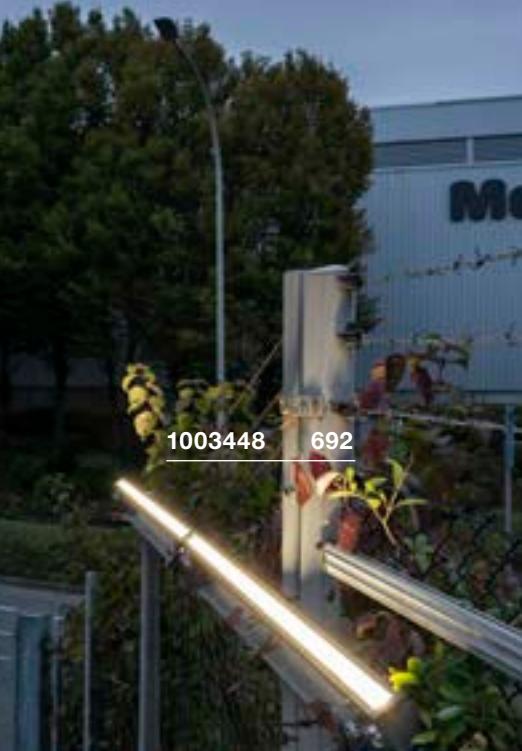


SAMRINA SP, single, GU10



220-240V ~50/60Hz
Total wattage: 27W
Material: aluminium/glass

- IP44 safety plug



220-240V ~50/60Hz
Material: plastic/glass

- Contains recycled material
- IP44 safety plug



Down 1600lm | 3000K



Base: GU10 Max. diameter: 6 cm L: 6 cm

Options	Prod. no.
● grey	231072

Options	Prod. no.
● black	1004757



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h




Prod. no.: 1005077



NAUTILUS 10
SP, Round, QPAR51



BIG NAUTILUS
SP, Round, QPAR51



220-240V ~50/60Hz
Material: aluminium

- IP44 safety plug

SOCKET INSIDE <35 W

Base: 1xGU10

max. L: 5.7 cm

SOCKET INSIDE <11 W

Base: GU10

Max. diameter: 5.1 cm | L: 8.3 cm

Options	Prod. no.
● grey	227418



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077





Options	Prod. no.
● black	227410
● rust	1001964
● green	1001965




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077

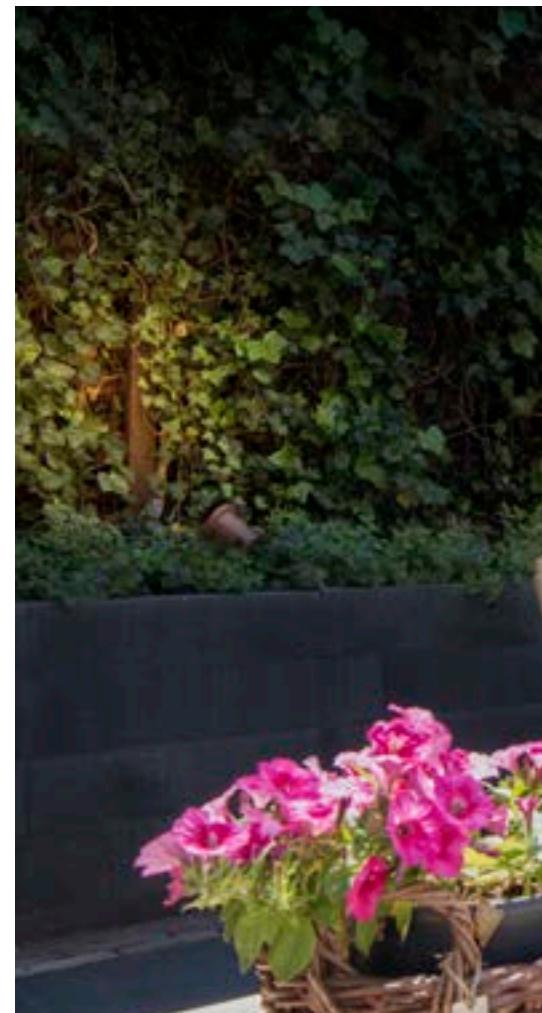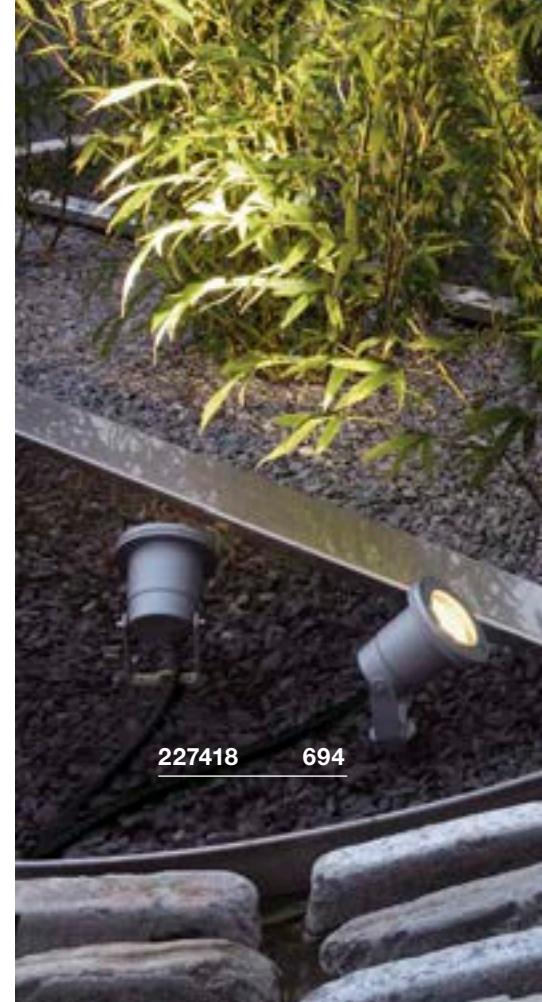



NAUTILUS 10 SP, Round, QPAR51



220-240V ~50/60Hz
Material: stainless steel 316

- IP44 safety plug

SOCKET INSIDE <25 W

Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● Stainless steel	229740




1001964 694

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



NAUTILUS 10
SP, square



100-277 V ~50/60 Hz | 700 mA

Total wattage: 8.5W

Material: aluminium/glass

- IP44 safety plug






Down

660lm | 3000K

Options	Prod. no.
● anthracite	231035



**NAUTILUS
SP, QR-C51**

**NAUTILUS 10 SPOT
SP, QPAR51**

**NAUTILUS 10 SPOT LED
SP**



12V ~50Hz
Material: stainless steel 304/glass

- Open cable end



220-240V ~50/60Hz
Material: stainless steel 316

- Open cable end



220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

- IP44 safety plug



Base: 1xGX5.3



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm



Down

520lm | 3000K

Options	Prod. no.
● Stainless steel	229090

Options	Prod. no.
● Stainless steel	229741

Options	Prod. no.
● Stainless steel	1001962

LED GU5.3 | 5.8W | 36°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no.: 1001574



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077






Product	Prod. no.
Connection box IP68, 3-pole ● black	228730

Product	Prod. no.
Plastic ground spike ● black	900011
Mounting plate ● Stainless steel	1001963

DASAR® PROJECTOR SP, 12/24V



DASAR® 920 SP, 230V



12-24V DC
Total wattage: 6.5W
Material: stainless steel 316/glass

- Open cable end



Down 520lm | 3000K

Options	Prod. no.
● Stainless steel	233570



Product	Prod. no.
Stainless steel 316 ground spike	
● Stainless steel	233580
Plastic ground spike	
● black	900011
LED power supply 15W 12V	
○ white	1005444
LED power supply 15 W 24V	
○ white	1005445
Stainless steel 316 mounting plate	
● Stainless steel	233582

220-240V ~50/60Hz | 400mA
Total wattage: 4.6W
Material: stainless steel 316/glass

- IP44 safety plug




Down 300lm | 3000K

Options	Prod. no.
● Stainless steel	233571





Product	Prod. no.
Stainless steel 316 ground spike	
● Stainless steel	233580
Plastic ground spike	
● black	900011
Stainless steel 316 mounting plate	
● Stainless steel	233582

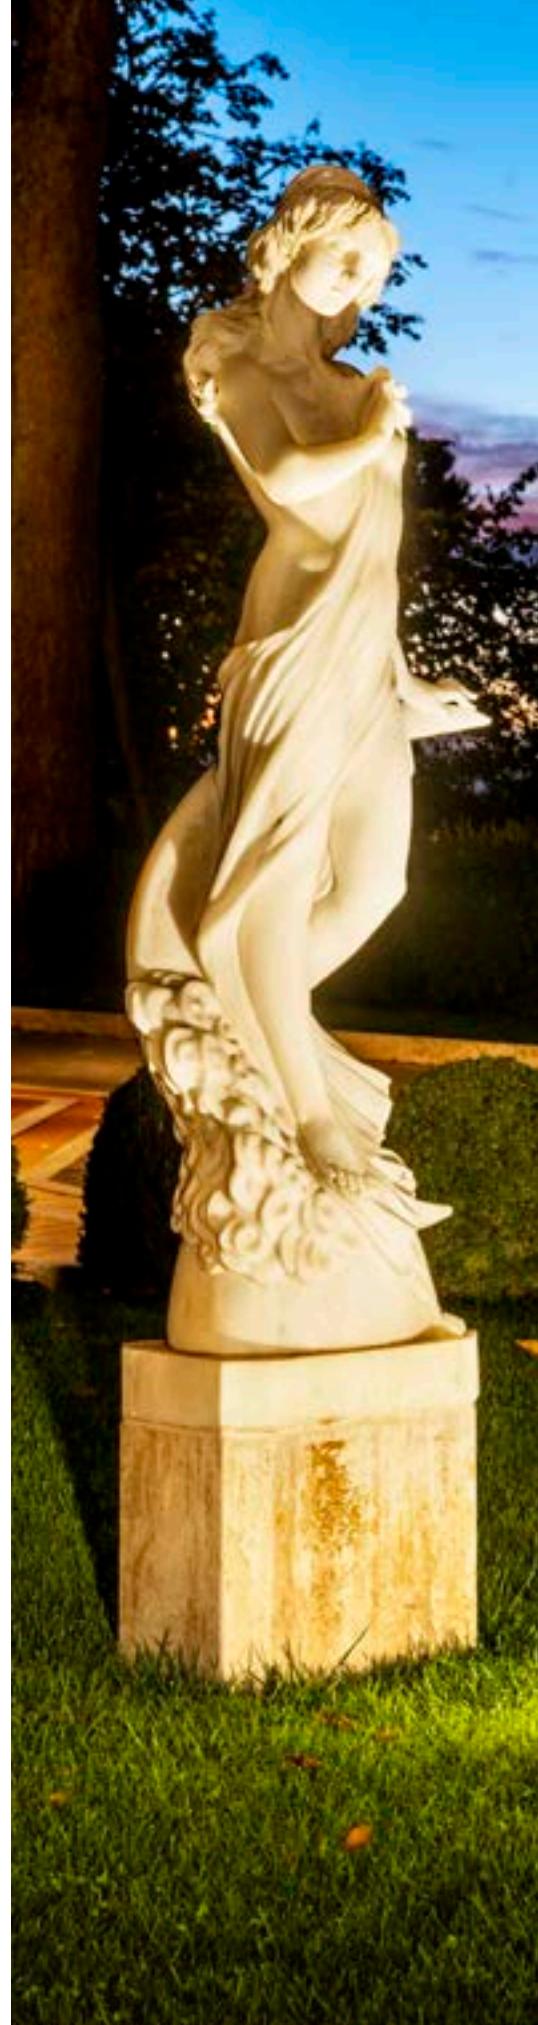



HELIA SPOT S
SP, single

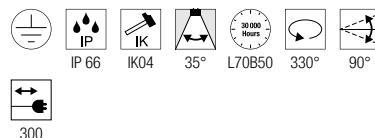

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium

- IP44 safety plug



CRI 80

Down 440lm | 3000K



Options	Prod. no.
● anthracite	1000735



Product	Prod. no.
Ground spike	
● Stainless steel	1000736

233570 **698**

HELIA SPOT L
SP, single, PHASE

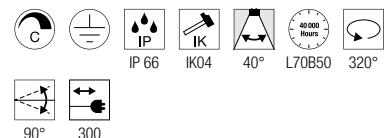

220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass

- IP44 safety plug



CRI 80

Down 1340lm | 3000K


Options	Prod. no.
● anthracite	228555



Product	Prod. no.
Ground spike	
● Stainless steel	228560



1004652 701

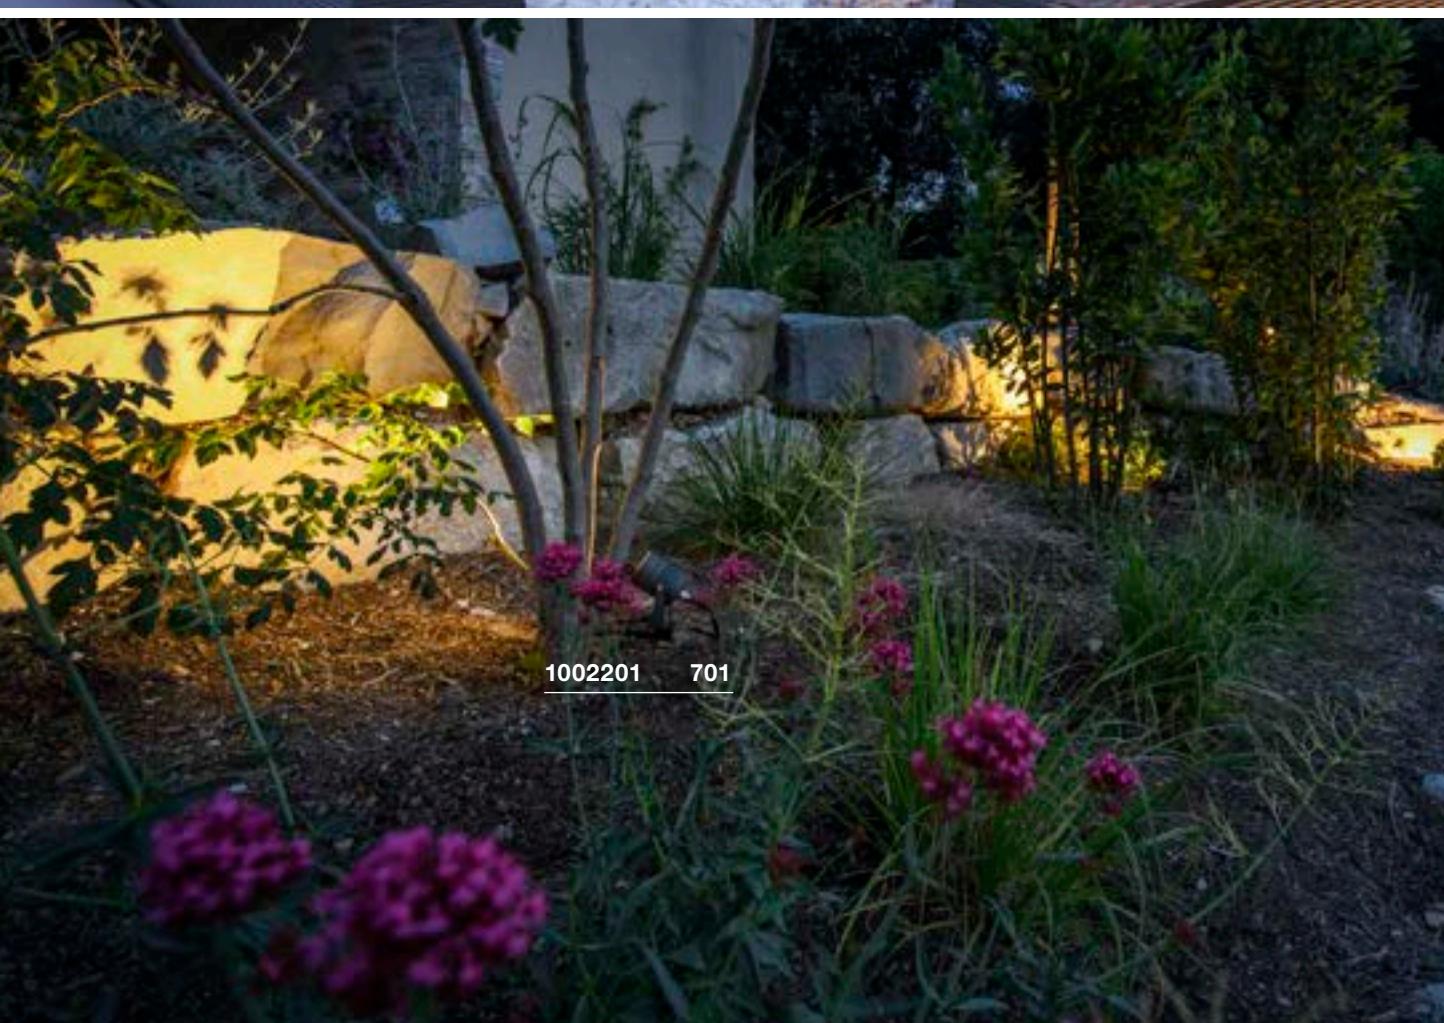




1002201 701



THEO BRACKET SP




LED SPIKE SP



220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug



100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

- IP44 safety plug



Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm



CRI
80

400lm | 3000K

Options	Prod. no.
● anthracite	1004652


Options	Prod. no.
● anthracite	1002201
● rust	1002203



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077



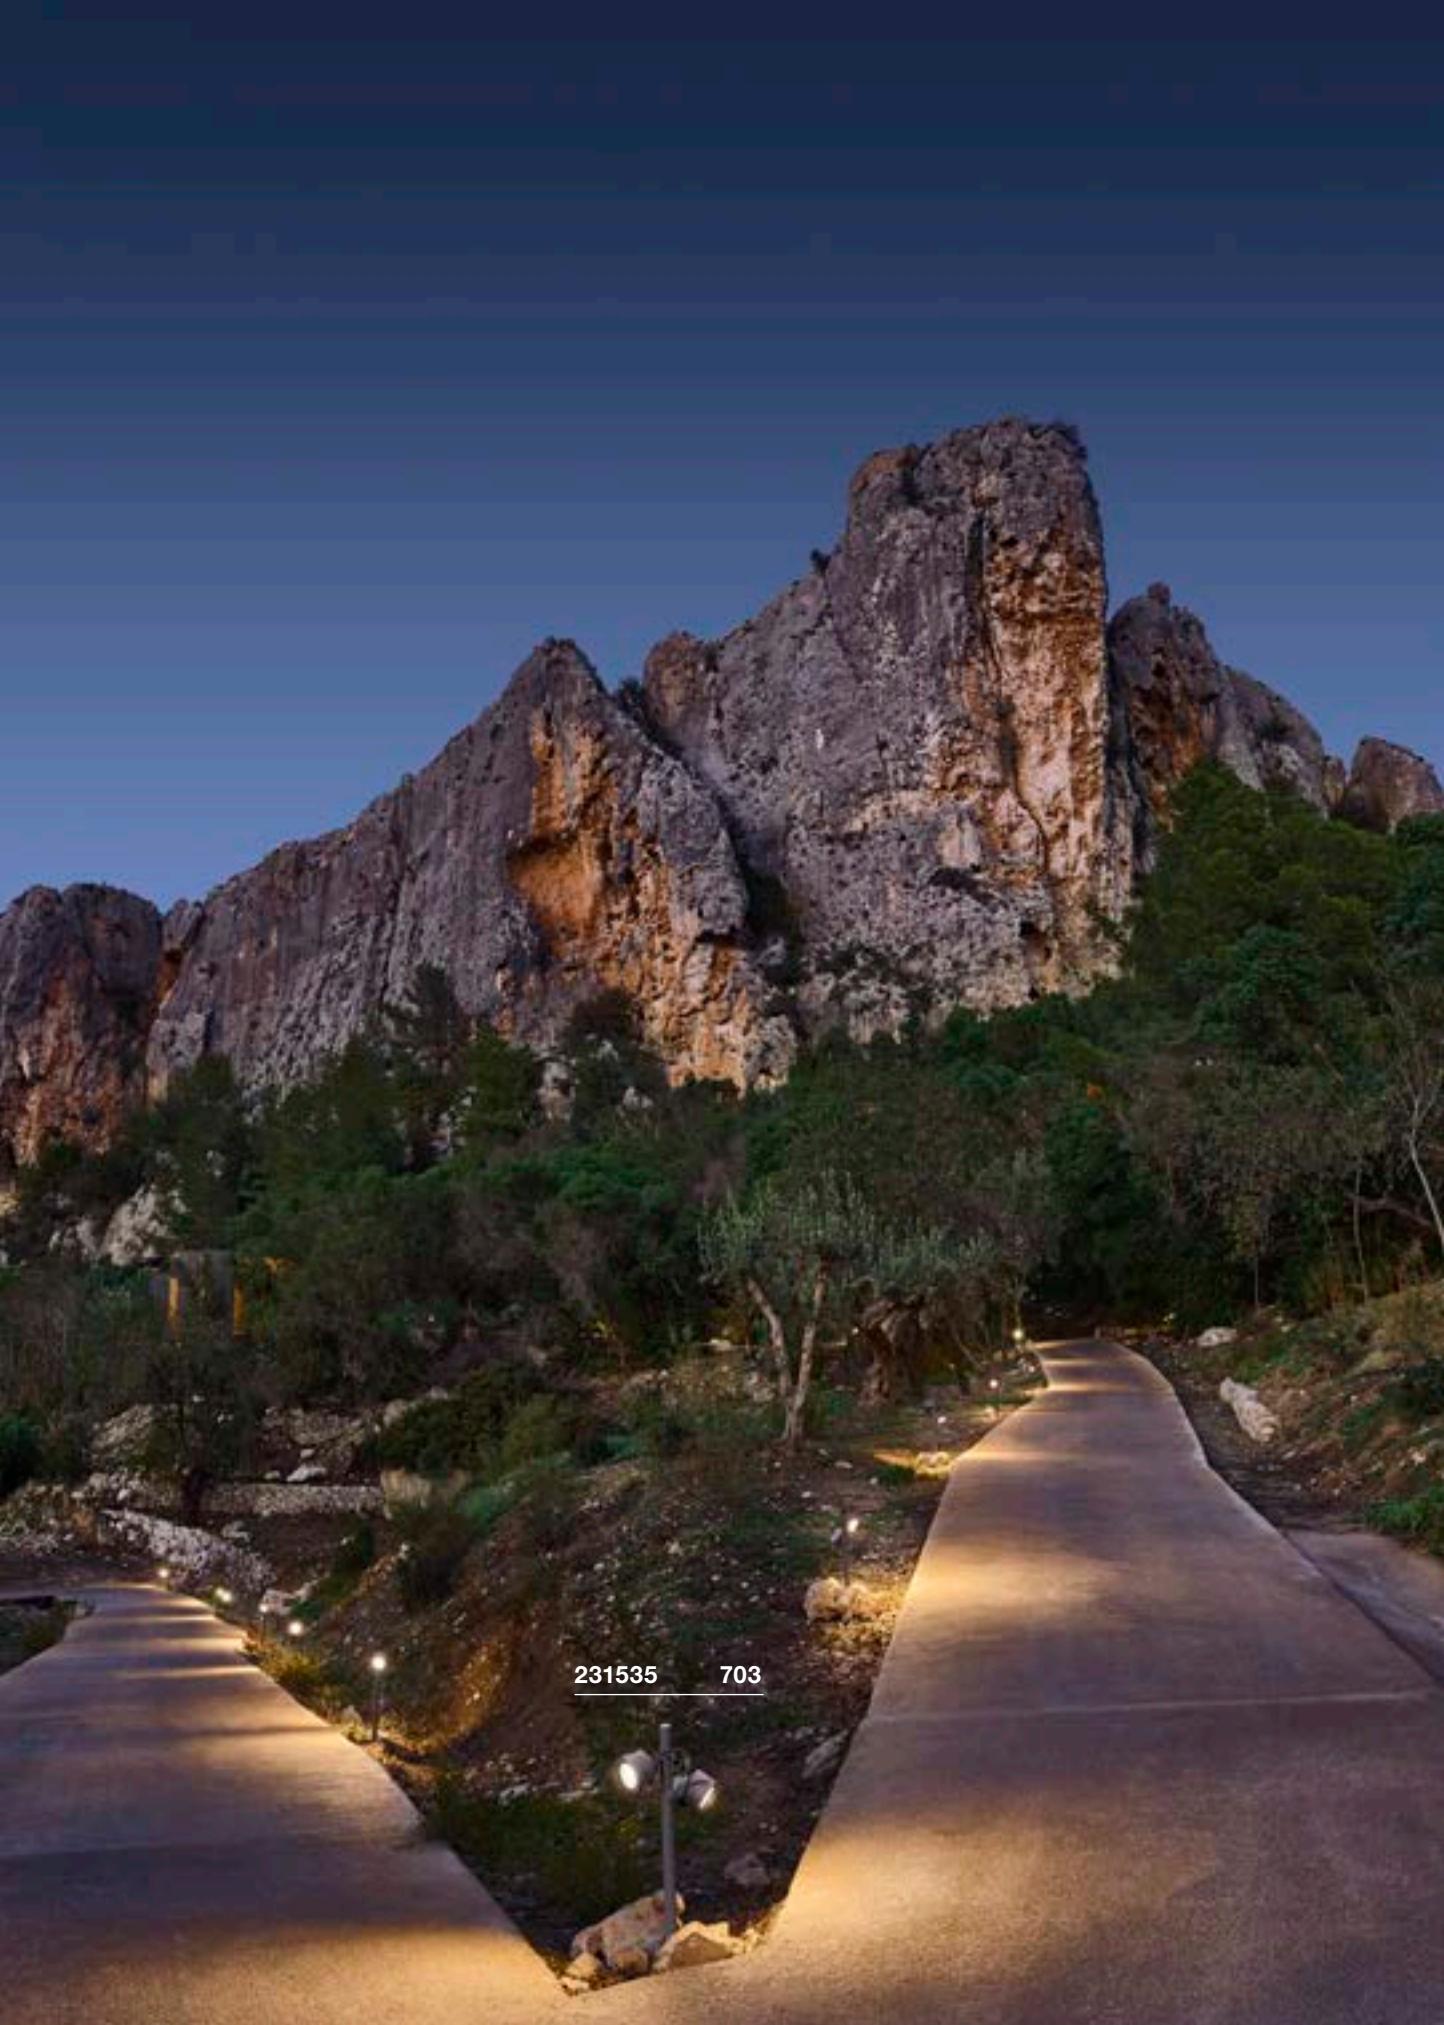

231535




703



SITRA 360 SPIKE
SP, single, TCR-TSE




SITRA 360 SPIKE
SP, double, TCR-TSE



220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug



220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug



Base: 1xG53 Max. diameter: 7.5 cm L: 3.5 cm



Base: 2xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
● anthracite	231525

Options	Prod. no.
● anthracite	231535



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271





234515

735



SOCKET PHOTONI 709	LED LID II 711	LED LID II 711	LED LID I 713	LED LID I 713	LED I-RING 714
LED OVAL 14 715	LED OVAL 18 715	LED CONCRETO M 717	LED CONCRETO L 717	LED VANO WING 719	LED VANO WING 719
LED MANA BASE 720	LED RUSTY® MANA 720	LED RUSTY® MANA 720	LED MANA OUT 721	LED MANA OUT 721	LED ENOLA OCULUS 723
LED ENOLA OCULUS 723	LED ENOLA OCULUS S 725	LED ENOLA OCULUS M 725	LED ENOLA ROUND L 725	LED ENOLA ROUND S UP/DOWN 727	LED ENOLA ROUND M UP/DOWN 727
LED ENOLA ROUND L UP/DOWN 727	LED ENOLA SQUARE S 729	LED ENOLA SQUARE M 729	LED ENOLA SQUARE L 729	LED ENOLA SQUARE S UP/DOWN 730	LED ENOLA SQUARE M UP/DOWN 730
LED ENOLA SQUARE L UP/DOWN 730	SOCKET THEO UP/DOWN 735	LED BIG THEO BEAM UP/FLOOD DOWN 735	SOCKET BIG THEO UP/DOWN 735	LED BIG THEO FLOOD UP/DOWN 736	SOCKET THEO 736
SOCKET BIG THEO 737	LED BIG THEO 737	LED SITRA S 739	LED SITRA S 739	LED SITRA M 741	LED SITRA L 741

 NEW

					
SOCKET SITRA CUBE 741	SOCKET GRAFIT 742	SOCKET GRAFIT 742	SOCKET GRAFIT 743	SOCKET GRAFIT 743	LED QUADRULO 744
					
SOCKET QUADRULO SENSOR 745	SOCKET QUADRULO 745	SOCKET MERIDIAN 746	SOCKET MERIDIAN BOX 746	SOCKET MERIDIAN BOX SENSOR 747	SOCKET MERIDIAN BOX 747
					
LED ESKINA FRAME 749	LED ESKINA FRAME 749	LED ESKINA FRAME 749	LED BOOKAT 751	LED BIG QUAD 752	LED QUAD 752
					
LED QUAD UP/DOWN 15 753	LED BIG QUAD UP/DOWN 755	LED BIG QUAD 755	LED RUSTY® UP/DOWN 756	LED RUSTY® UP/DOWN 756	LED OVALISK SENSOR 757
					
LED OVALISK 757	LED PEMA® 758	LED PEMA® 759	LED PEMA® 759	SOCKET PEMA® 759	LED FLATT SENSOR 760
					
LED FLATT 760	SOCKET ASTINA 761	SOCKET ASTINA STEEL 761	LED ANGOLUX SENSOR 762	LED ANGOLUX 762	LED VILUA S 763
					
LED VILUA L 763	LED VILUA 763	SOCKET MYRA UP/DOWN 764	LED SITRA UP/DOWN 765	SOCKET SITRA UP/DOWN 765	SOCKET ROX 767



SOCKET ROX UP/DOWN 767	LED DELWA 767	LED SLOTS 768	SOCKET WALLYX 768	LED DOWNUNDER OUT 769	LED DOWNUNDER OUT 769
LED ABRIDOR SENSOR 770	LED ABRIDOR 770	LED ORDI SENSOR 771	LED ORDI 771	SOCKET BOX-L 773	LED BOX-L 773
SOCKET BOX UP/DOWN 773	LED LOGS 775	LED OUT-BEAM UP / FLOOD DOWN 775	LED L-LINE OUT 775	SOCKET PHOTONIA 777	SOCKET MOLAT 777
SOCKET GLOO PURE 777	SOCKET F-POL 778	SOCKET SQUARE 779	SOCKET KERAS ELT 779	SOCKET SITRA 779	LED RASCALI 780
LED IPERI 780	SOCKET QUADRASYL 781	SOCKET SQUARE TURN 781	LED TODAY PRO 783	LED ESKINA D 783	SOCKET MYRA DISPLAY 783
LED LED SPOT 785	SOCKET NAUTILUS 785	SOCKET MYRA 785			





1007585 709



PHOTONI
WL, E27

NEW



220-240V ~50/60Hz
Material: aluminium

- sea-air-resistant

SOCKET INSIDE 13 W

Base: 1xE27 Max. diameter: 6 cm L: 11.6 cm

Options	Prod. no.
● black	1007585
● rust	1007581




LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289





1007281 711

LID II
WLLID II
WL, up/down

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium



Down 800lm | 2700K 800lm | 3000K



Up 750lm | 2700K 750lm | 3000K
Down 750lm | 2700K 750lm | 3000K

Options	Prod. no.
● anthracite	1007282 ●

Options	Prod. no.
● anthracite	1007281 ●

1007667

713





LID I
WL, single






NEW

LID I
WL, double




NEW



220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium



Down 900lm | 2700K 1050lm | 3000K



220-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium



Spot 1 850lm | 2700K 1000lm | 3000K
Spot 2 850lm | 2700K 1000lm | 3000K

Options

- anthracite

Prod. no.

1007667

Options

- anthracite



Prod. no.

1007668

I-RING
WL



1007236 714



100-240V ~50/60Hz | 350mA

Total wattage: 9.2W

Material: aluminium



Down

670lm | 3000K

Options
● anthracite



Prod. no.
1007236 ●

OVAL 14
WL, up/down

NEW

OVAL 18
WL, up/down

NEW



220-240V ~50/60Hz | 145mA
 Total wattage: 5.7W
 Material: aluminium/polycarbonate (PC)

CRI
80

Up	280lm	2700K	280lm	3000K
Down	280lm	2700K	280lm	3000K



220-240V ~50/60Hz | 275mA
 Total wattage: 9.3W
 Material: aluminium/polycarbonate (PC)

CRI
80




Up	430lm	2700K	430lm	3000K
Down	430lm	2700K	430lm	3000K

Options	Prod. no.
<input checked="" type="radio"/> black	1007142
<input type="radio"/> white	1007143


Options	Prod. no.
<input checked="" type="radio"/> black	1007144
<input type="radio"/> white	1007145

1006405 **717**



CONCRETO M
WLCONCRETO L
WL

220-240V ~50/60Hz | 700mA
 Total wattage: 8.5W
 Material: concrete/aluminium



220-240V ~50/60Hz | 700mA
 Total wattage: 12W
 Material: concrete/aluminium



Down

270lm | 3000K



Down

470lm | 3000K

Options	Prod. no.
● grey	1006404 ●




Options	Prod. no.
● grey	1006405 ●

JAS DOMINICAS


MONASTERIO SANTA CATALINA DE SIENA



1006268 719

VANO WING
SP, DALIVANO WING
SP, DALI

220-240V ~50/60Hz | 500mA
 Total wattage: 25W
 Material: aluminium/glass



220-240V ~50/60Hz | 1050mA
 Total wattage: 49W
 Material: aluminium/glass



Down

1400lm | 3000K



Down

3140lm | 3000K

Options	Prod. no.
● grey	1006268

Options	Prod. no.
● grey	1006270

MANA BASE WL, round, PHASE





RUSTY® MANA shade, square

NEW



L: 28 cm W: 28 cm H: 1.5 cm
Material: FeCSi steel

Options	Prod. no.
● rust	1006317



220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)



CRI
90

Down 800lm | 2700K | 820lm | 3000K

RUSTY® MANA shade, round

NEW




H: 1.5 cm Diameter: 28 cm
Material: FeCSi steel

Options	Prod. no.
● anthracite	1006319

Options	Prod. no.
● rust	1006318

1006319 + 1006317 720

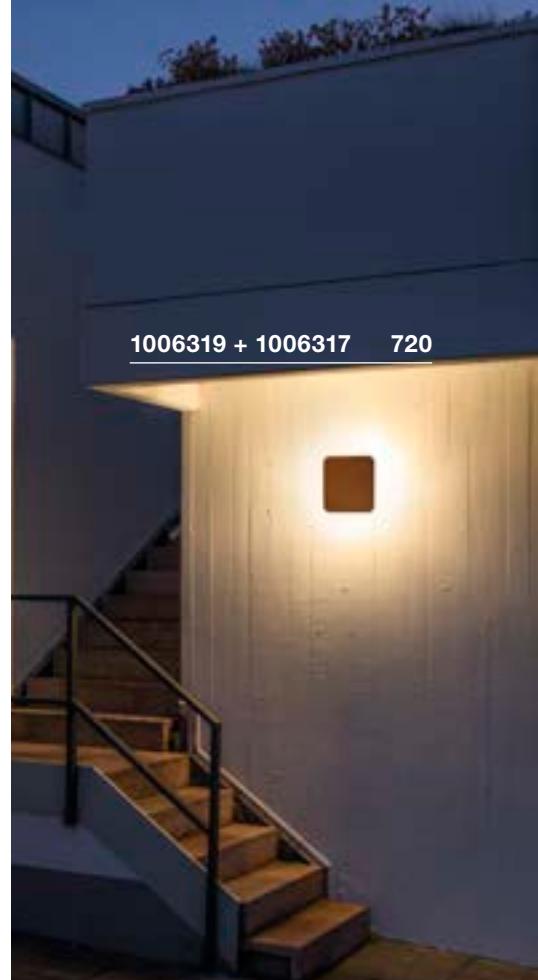

1003470 721









1002902

721

MANA OUT
WL, PHASEMANA OUT
WL, Set

NEW



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/aluminium

220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/concrete


Up 325lm | 3000K
Down 325lm | 3000KUp 325lm | 3000K
Down 325lm | 3000K

Options	Prod. no.
anthracite	1002900
rust	1002902

Options	Prod. no.
grey	1003470

1006328 723



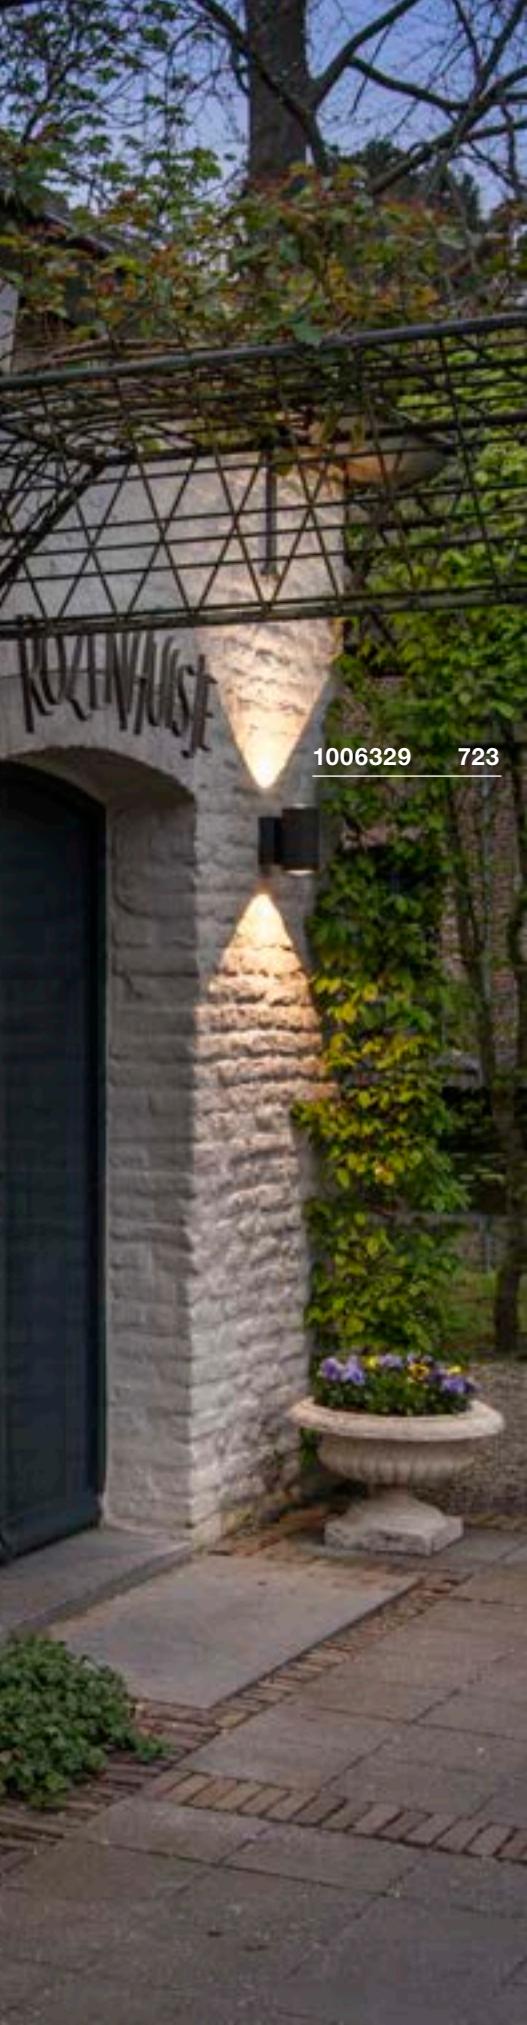




1006329 723

ENOLA OCULUS
WL, single

NEW

ENOLA OCULUS
WL, up/down


NEW



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass



220-240V ~50/60Hz | 500mA

Total wattage: 20W

Material: aluminium/glass



Down 1000lm | 3000K | 1100lm | 4000K

Up 940lm | 3000K | 1060lm | 4000K
Down 940lm | 3000K | 1060lm | 4000K

Options	Prod. no.
● anthracite	1006328

Options	Prod. no.
● anthracite	1006329



Product	Prod. no.
Spacer	
● anthracite	1002853





Product	Prod. no.
Spacer	
● anthracite	1002853

1003440 725





ENOLA ROUND S WL, single





100-240V ~50/60Hz | 500mA

Total wattage: 6W

Material: aluminium/glass

ENOLA ROUND M WL, single




220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

ENOLA ROUND L WL, single



220-240V ~50/60Hz | 900mA

Total wattage: 36W

Material: aluminium/glass



Down 450lm | 3000K | 500lm | 4000K



Down 860lm | 3000K | 980lm | 4000K



Down 3300lm | 3000K | 3700lm | 4000K

Options	Prod. no.
● anthracite	1003422

Options	Prod. no.
● anthracite	1003423

Options	Prod. no.
● anthracite	1003440



Product	Prod. no.
Spacer	
● anthracite	1002853



Product	Prod. no.
Spacer	
● anthracite	1002853
Lens 19°	
● black/chrome	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207



Product	Prod. no.
Spacer	
● anthracite	1002853



1003441 727







ENOLA ROUND S UP/DOWN WL



ENOLA ROUND M UP/DOWN WL



ENOLA ROUND L UP/DOWN WL



220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/glass

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass



Up	310lm	3000K	350lm	4000K
Down	310lm	3000K	350lm	4000K



Up	830lm	3000K	950lm	4000K
Down	830lm	3000K	950lm	4000K



Up	2700lm	3000K	3000lm	4000K
Down	2700lm	3000K	3000lm	4000K

Options	Prod. no.
● anthracite	1003424

Options	Prod. no.
● anthracite	1003425

Options	Prod. no.
● anthracite	1003441

Product	Prod. no.
Spacer	
● anthracite	1002853
Reflector 60°	
● chrome	1005262


Product	Prod. no.
Spacer	
● anthracite	1002853
Lens 19°	
● black/chrome	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207

Product	Prod. no.
Spacer	
● anthracite	1002853
Reflector 60°	
● chrome	1005263





ENOLA SQUARE S WL, single




100-240V ~50/60Hz | 500mA

Total wattage: 6W

Material: aluminium/glass

ENOLA SQUARE M WL, single





220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

ENOLA SQUARE L WL, single



220-240V ~50/60Hz | 900mA

Total wattage: 36W

Material: aluminium/glass



Down 450lm | 3000K | 500lm | 4000K



Down 860lm | 3000K | 980lm | 4000K



Down 3300lm | 3000K | 3700lm | 4000K

Options	Prod. no.
● anthracite	1003416

Options	Prod. no.
● anthracite	1003417

Options	Prod. no.
● anthracite	1003437



Product	Prod. no.
Spacer	
● anthracite	1002853





Product	Prod. no.
Spacer	
● anthracite	1002853
Lens 19°	
● black/chrome	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207



Product	Prod. no.
Spacer	
● anthracite	1002853



ENOLA SQUARE S UP/DOWN WL



10

220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass



ENOLA SQUARE M UP/DOWN WL

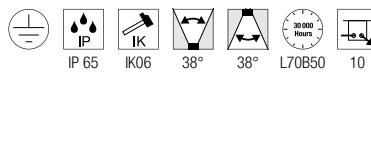

10

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/glass

ENOLA SQUARE L UP/DOWN WL

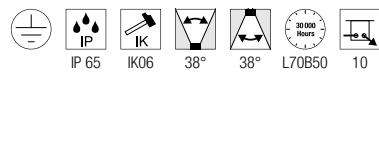

10

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass



Up	310lm 3000K	350lm 4000K
Down	310lm 3000K	350lm 4000K

Options	Prod. no.
● anthracite	1003418



Up	830lm 3000K	950lm 4000K
Down	830lm 3000K	950lm 4000K

Options	Prod. no.
● anthracite	1003419



Up	2700lm 3000K	3000lm 4000K
Down	2700lm 3000K	3000lm 4000K

Options	Prod. no.
● anthracite	1003438



Product	Prod. no.
Spacer	
● anthracite	1002853
Reflector 60°	
● chrome	1005262



Product	Prod. no.
Spacer	
● anthracite	1002853
Lens 19°	
● black/chrome	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207



Product	Prod. no.
Spacer	
● anthracite	1002853
Reflector 60°	
● chrome	1005263



ENOLA S, M, L
Reflector, 56°



S | H: 1.85 cm Diameter: 4.5 cm
 M | H: 4.00 cm Diameter: 7.5 cm
 L | H: 6.96 cm Diameter: 11 cm
 Material: polycarbonate (PC)



ENOLA M
Lens, 19°



H: 3.8 cm
 Diameter: 7.5 cm
 Material: steel/polycarbonate (PC)



ENOLA M
Asymmetrical lens



H: 3 cm
 Diameter: 7.5 cm
 Material: steel/polycarbonate (PC)



Options	Prod. no.
● chrome S	1005262
● chrome M	1005207
● chrome L	1005263

Options	Prod. no.
● black/chrome	1005205

Options	Prod. no.
● black/chrome	1005206




EASY TO INSTALL

1

WALL MOUNTING.


Screw the mounting plate into the wall with the fixing screw.



2

SIMPLY PLUG TOGETHER.

Connect the power supply plug connection to the LED lights.

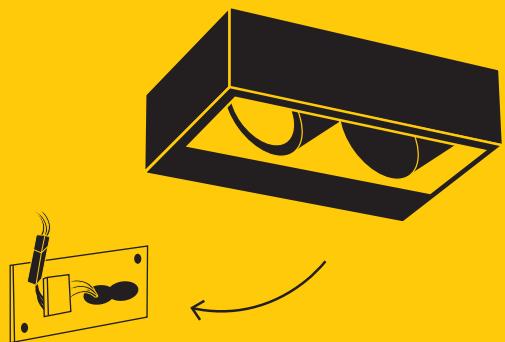

3

SIMPLE AND SECURE ASSEMBLY.

Hook the light into the useful guiding groove on the mounting plate and screw the light body to the mounting plate.



DONE!

Because efficiency always pays off, SLV lights are easy, quick and safe to install. On account of the fixed mounting plates, detachable lamp heads, spring clamps, through wiring, cable entries and various other features, they offer crucial benefits: in that they save you time, effort, and expense.

MOUNTABLE LAMP HEADS.

With our ENOLA® family, the lamp head can be separated from the mounting plate attached to the wall. This way, after mounting using the integrated nib and establishing the electrical connection using the plug connection, both hands remain free to securely screw on the lights.



PRACTICAL SPRING CLAMPS.

The cube-shaped SITRA CUBE wall lights offer wonderful modern simplicity. This means they are also fast and simple to install: Simply directly connect the connection cable (no tools required) and connect the mounting plate coupling to the light connector – done!



FEED-THROUGH WIRING.

Our QUADRULO wall and ceiling lights show how simply through-wiring functions in practice. Two cable entries in a figure of 8 configuration are provided in the light's baseplate. The spring clamp also has two connection options. This means that multiple lights can be quickly and simply installed simultaneously.



229532 **735**



234515 **735**








**THEO UP/DOWN
WL, QPAR51**




**BIG THEO BEAM UP/
FLOOD DOWN
WL**




**BIG THEO UP/DOWN
WL, QPAR111**



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz | 500mA
Total wattage: 29W
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass



Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> anthracite	229535
<input type="radio"/> white	229531
<input checked="" type="radio"/> grey	229532



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077



Up
Down

130lm
2000lm | 3000K
3000K



Base: 2xGU10

Options	Prod. no.
<input checked="" type="radio"/> anthracite	234515

Options	Prod. no.
<input checked="" type="radio"/> anthracite	229575
<input checked="" type="radio"/> grey	229574



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h





Prod. no.: 1005278

BIG THEO FLOOD UP/DOWN
WL



THEO
WL, QPAR51



220-240V ~50/60Hz | 1000mA

Total wattage: 42W

Material: aluminium/glass



220-240V ~50/60Hz

Material: aluminium/glass



Up
Down

2000lm | 3000K
2000lm | 3000K



Base: 1xGU10


Options	Prod. no.
● anthracite	234505

Options	Prod. no.
● anthracite	229525
● grey	229524



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h




Prod. no.: 1005077

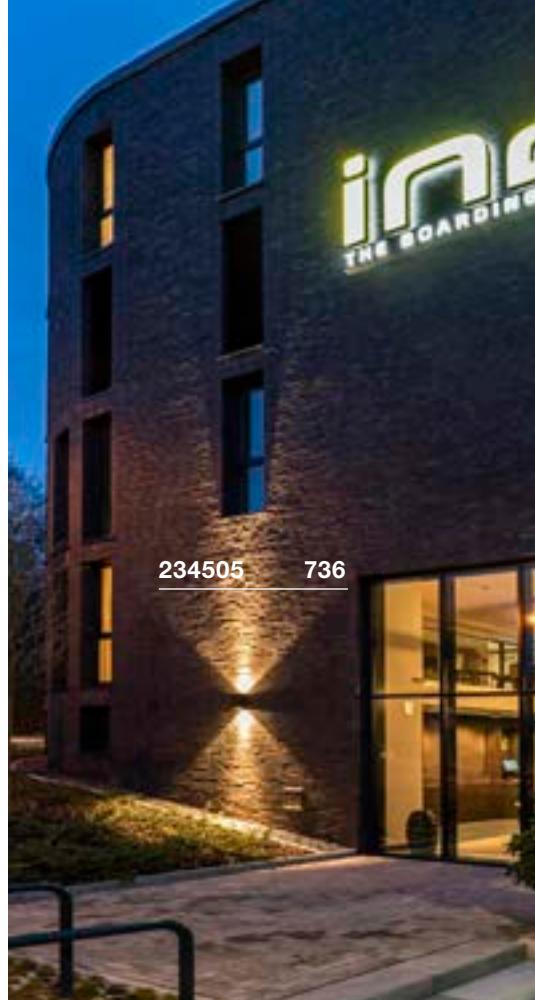




**BIG THEO
WL, QPAR111**

**BIG THEO
WL**



220-240V ~50/60Hz
Material: aluminium/glass



100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass



Base: 1xGU10



Down 2000lm | 3000K

Options	Prod. no.
● anthracite	229565
● grey	229564

Options	Prod. no.
● anthracite	234525



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278





1002032 739





SITRA S
WL, single, square





100-277V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium

SITRA S
WL, single, square



220-240V ~50/60Hz | 500mA

Total wattage: 6.2W

Material: aluminium/glass



Up	550lm 3000K	635lm 4000K
Down	550lm 3000K	635lm 4000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1002032
<input type="radio"/> white	1002033
<input checked="" type="radio"/> rust	1002034




Up	580lm 3000K	620lm 4000K
----	---------------	---------------

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1005148
<input type="radio"/> white	1005149
<input checked="" type="radio"/> rust	1005150




232531 741

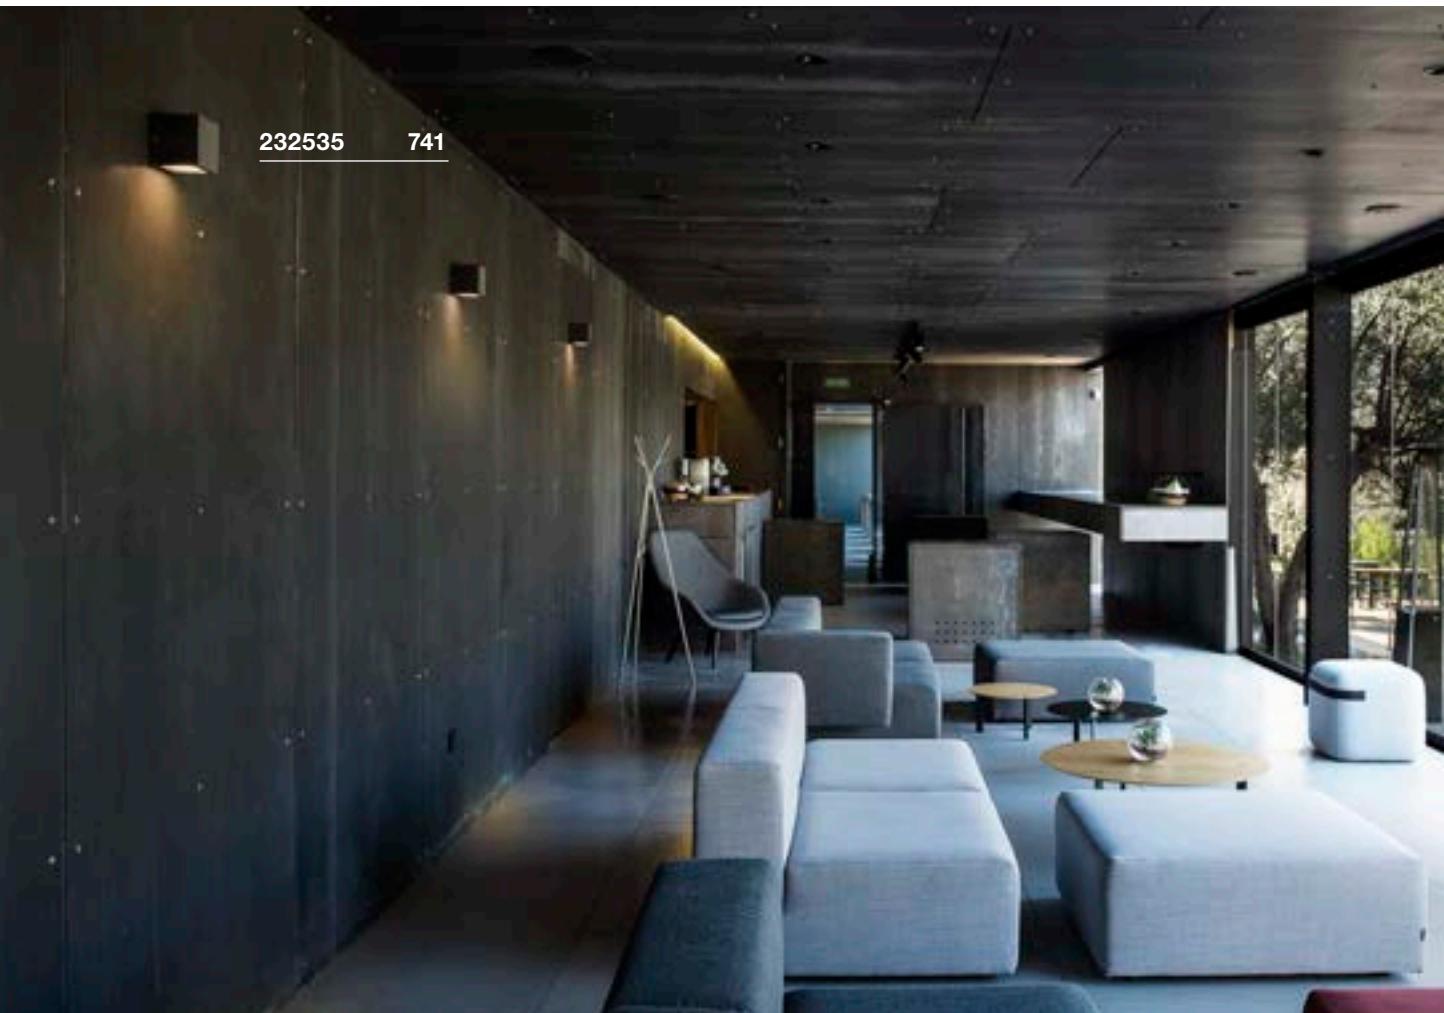

232535 741



SITRA M WL, up/down, square




220-240V ~50/60Hz | 350mA

Total wattage: 14W

Material: aluminium

SITRA L WL, up/down, square




220-240V ~50/60Hz | 600mA

Total wattage: 24W

Material: aluminium

SITRA CUBE WL, TCR-TSE



220-240V ~50/60Hz

Material: aluminium/glass



Up	850lm 3000K	940lm 4000K
Down	850lm 3000K	940lm 4000K



Up	1400lm 3000K	1530lm 4000K
Down	1400lm 3000K	1530lm 4000K



Base: 2xG53 Max. diameter: 7.5 cm L: 2.7 cm


Options	Prod. no.
<input checked="" type="radio"/> anthracite 1700 / 1880lm	1005151
<input type="radio"/> white 1700 / 1880lm	1005153
<input checked="" type="radio"/> rust 1600 / 1700lm	1005154

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1005155
<input type="radio"/> white	1005156
<input checked="" type="radio"/> rust	1005157

Options	Prod. no.
<input checked="" type="radio"/> anthracite	232535
<input type="radio"/> white	232531
<input checked="" type="radio"/> rust	232537

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000hProd. no.: **1005271**

GRAFIT
WL, round, sensor, E27



220-240V ~50/60Hz
Material: aluminium/acrylic



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006179




LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



GRAFIT
WL, round, E27



220-240V ~50/60Hz
Material: aluminium/acrylic





Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006178






A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303

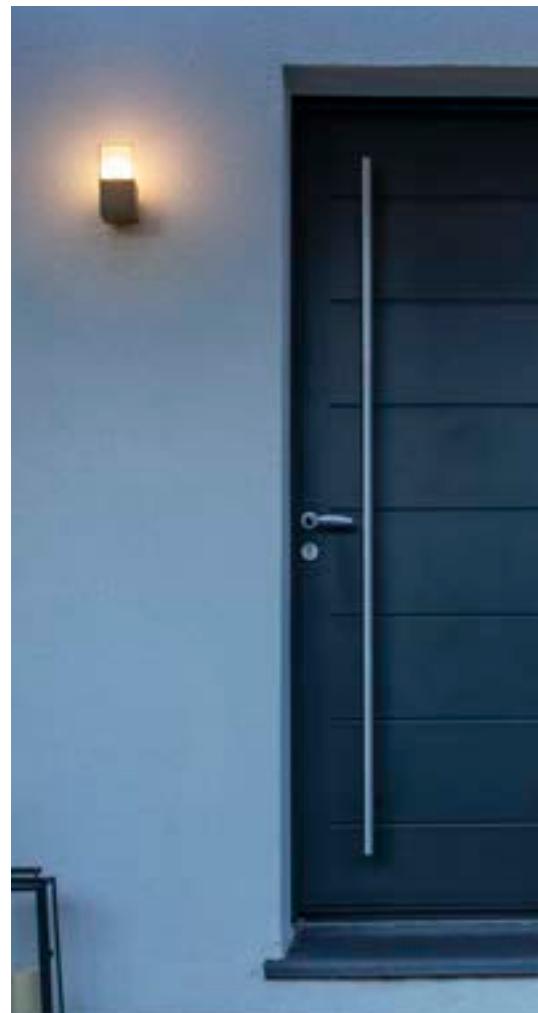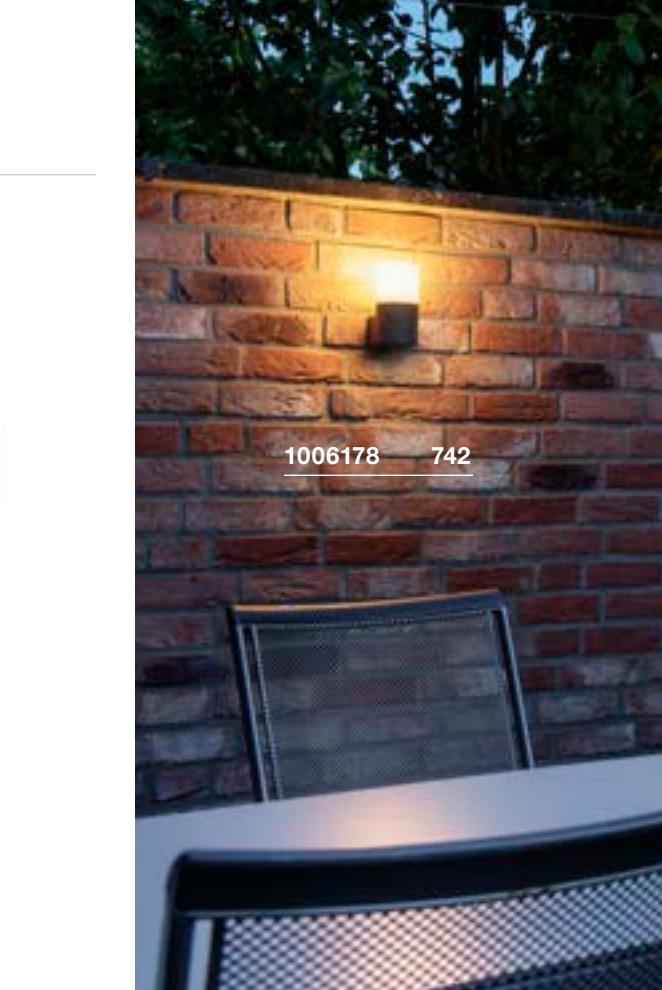




GRAFIT
WL, square, sensor, E27

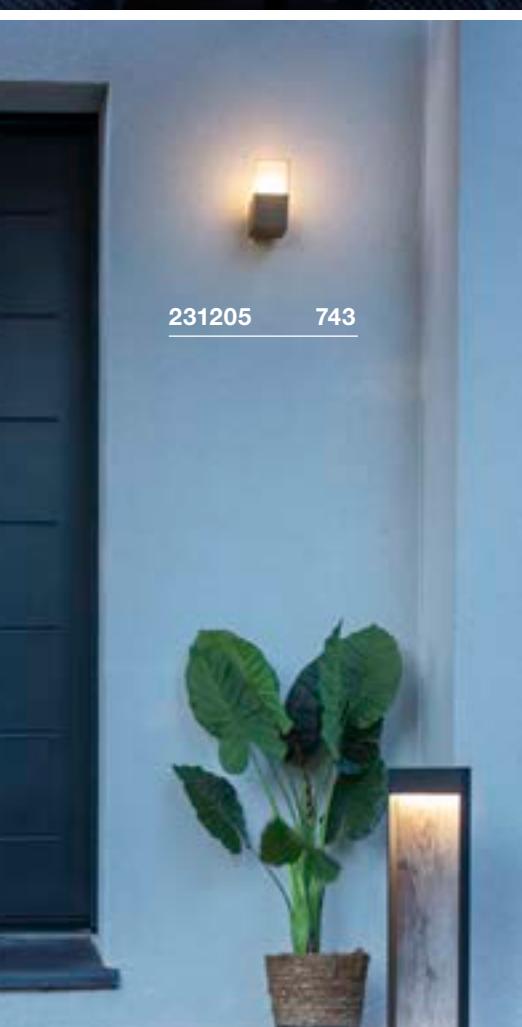

231205 **743**



220-240V ~50/60Hz
Material: aluminium/acrylic



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm

Options	Prod. no.
● anthracite	1006183



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



220-240V ~50/60Hz
Material: aluminium/plastic



Base: 1xE27 Max. diameter: 6 cm L: 11.5 cm



Options	Prod. no.
● anthracite	231205



QUADRULO
WL



1007207 744



100-277V ~50/60Hz | 350mA

Total wattage: 7.4W

Material: aluminium/polyvinyl chloride (PVC)







Down

270lm | 3000K
280lm

Options	Prod. no.
<input checked="" type="radio"/> anthracite 270lm	1005201
<input checked="" type="radio"/> anthracite/wood 280lm	1007207 ●



1002402 745

QUADRULO SENSOR
WL, E27QUADRULO
WL, E27220-240V ~50/60Hz
Material: aluminium/glass220-240V ~50/60Hz
Material: aluminium/glass

1002403 745

SOCKET
INSIDE <15
W

Base: 1xE27 Max. diameter: 8 cm L: 18 cm

Options	Prod. no.
● anthracite	1002402

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no.: 1005265

SOCKET
INSIDE <15
W

Base: 1xE27 Max. diameter: 8 cm L: 18 cm

Options	Prod. no.
● anthracite	1002403

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h




Prod. no.: 1005265



MERIDIAN
WL, E27



MERIDIAN BOX
WL, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

**SOCKET
INSIDE** <25 W


Base: 1xE27 Max. diameter: 7 cm L: 17.5 cm

Options	Prod. no.
● anthracite	230445
● grey	230444



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

**SOCKET
INSIDE** <25 W

Base: 1xE27 Max. diameter: 7 cm L: 17.5 cm

Options	Prod. no.
● anthracite	230045
● grey	230044



| 13.5W | 240°
4000K | 1600lm | EEK=E
14kWh/1000h

Prod. no.: 1005308





230445 746

MERIDIAN BOX SENSOR
WL, E27MERIDIAN BOX
WL, E27

230655 747


220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.



Base: 1xE27 Max. diameter: 7 cm L: 17.5 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	230085
<input type="radio"/> grey	230084

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- The ambient brightness and operating time can be adjusted.



Base: 1xE27 Max. diameter: 7 cm L: 17.5 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	230655
<input type="radio"/> rust	230657

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h


Prod. no.: 1005265



1004748 749





1006314 749

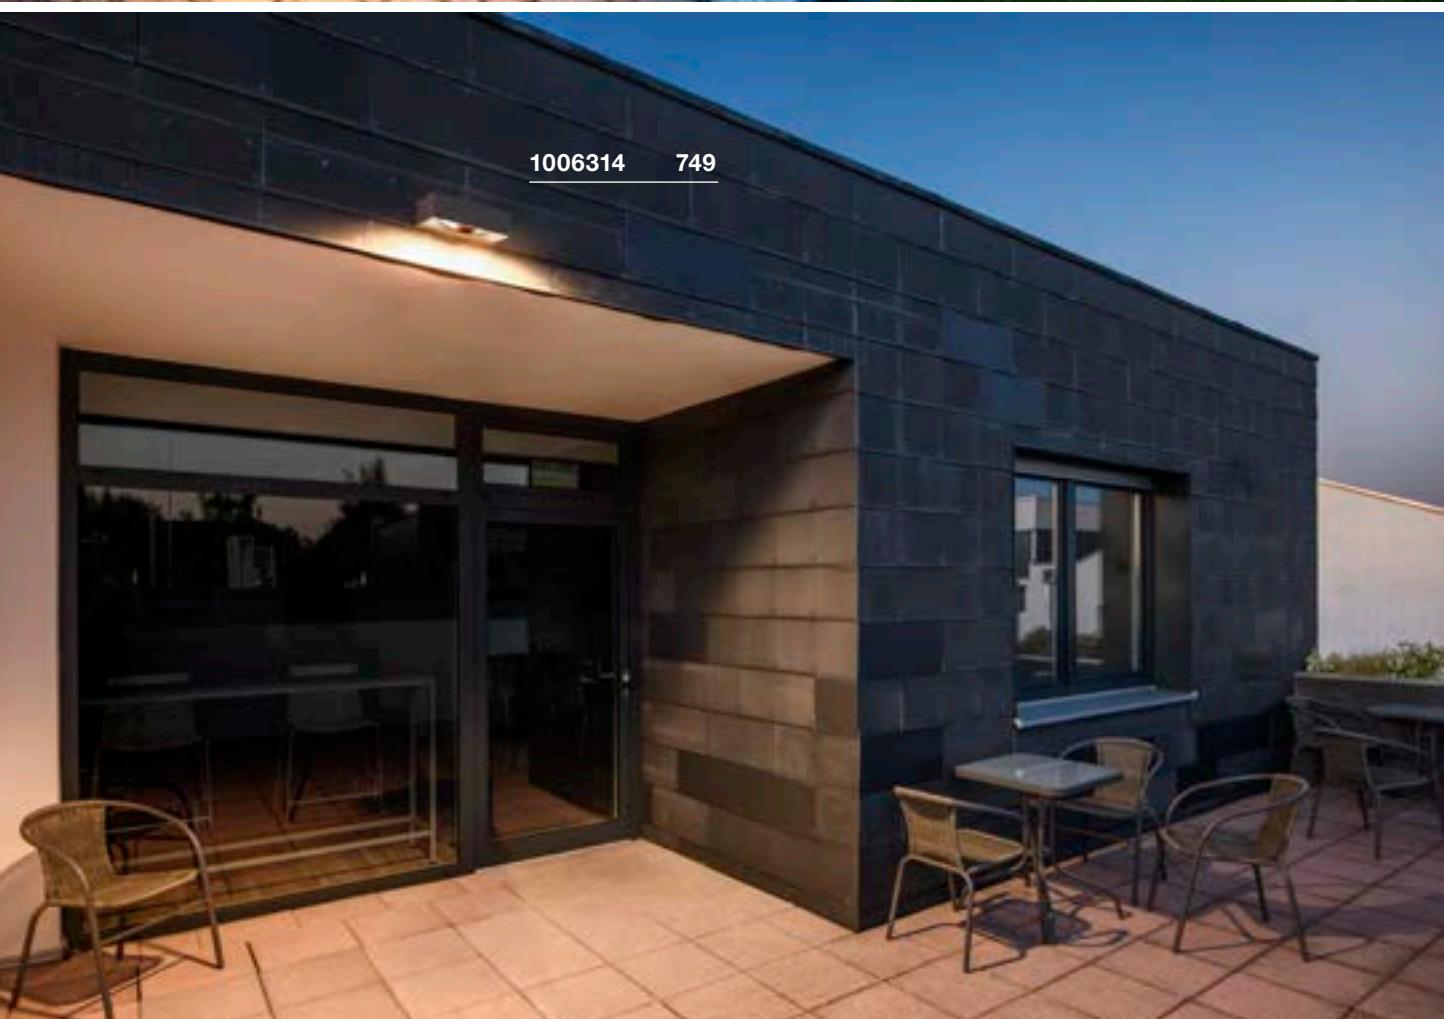



ESKINA FRAME WL





220-240V ~50/60Hz | 350mA

Total wattage: 15W

Material: aluminium

ESKINA FRAME WL, double





220-240V ~50/60Hz | 700mA

Total wattage: 27W

Material: aluminium

ESKINA FRAME WL, double



220-240V ~50/60Hz | 700mA

Total wattage: 27W

Material: aluminium



Down 1100lm | 3000K | 1200lm | 4000K



Spot 1 1100lm | 3000K | 1200lm | 4000K

Spot 2 1100lm | 3000K | 1200lm | 4000K



Spot 1 1100lm | 3000K | 1200lm | 4000K

Spot 2 1100lm | 3000K | 1200lm | 4000K

Options	Prod. no.
● anthracite	1004747

Options	Prod. no.
● anthracite	1004748


Options	Prod. no.
● anthracite	1006314

1005443 751






BOOKAT WL



1005441 683



100-277 V ~50/60 Hz | 700 mA

Total wattage: 15W

Material: aluminium




CRI
80

Down 920lm | 3000K 990lm | 4000K

Options	Prod. no.
● anthracite	1005443

BIG QUAD WL





100-240V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass



Down 260lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	232435

QUAD WL



200-240V ~50/60Hz | 700mA
Total wattage: 4.6W
Material: aluminium/glass





Down 80lm | 3000K
100lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite 80lm	232465
<input type="radio"/> white 100lm	232461





QUAD UP/DOWN 15 WL




100-277V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/glass




Up 260lm | 3000K
Down 260lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite 520lm	232445
<input type="radio"/> white 580lm	232441

1005126 755

BIG QUAD UP/DOWN
WL

220-240V ~50/60Hz | 500mA
 Total wattage: 8.2W
 Material: aluminium/glass

CRI
80Up
Down320lm | 3000K
320lm | 3000K

100-240V ~50/60Hz | 350mA
 Total wattage: 4.5W
 Material: aluminium/glass

CRI
80

Down


290lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1005126
<input type="radio"/> white	1005125

Options	Prod. no.
<input type="radio"/> white	232431

BIG QUAD
WL

RUSTY® UP/DOWN
WL, square



220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium



Up 259lm | 3000K
Down 285lm | 3000K | 260lm | 4000K
288lm | 4000K




220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium




Up 249lm | 3000K
Down 267lm | 3000K | 254lm | 4000K
271lm | 4000K

Options	Prod. no.
rust/anthracite	1004650

RUSTY® UP/DOWN
WL, round



220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium



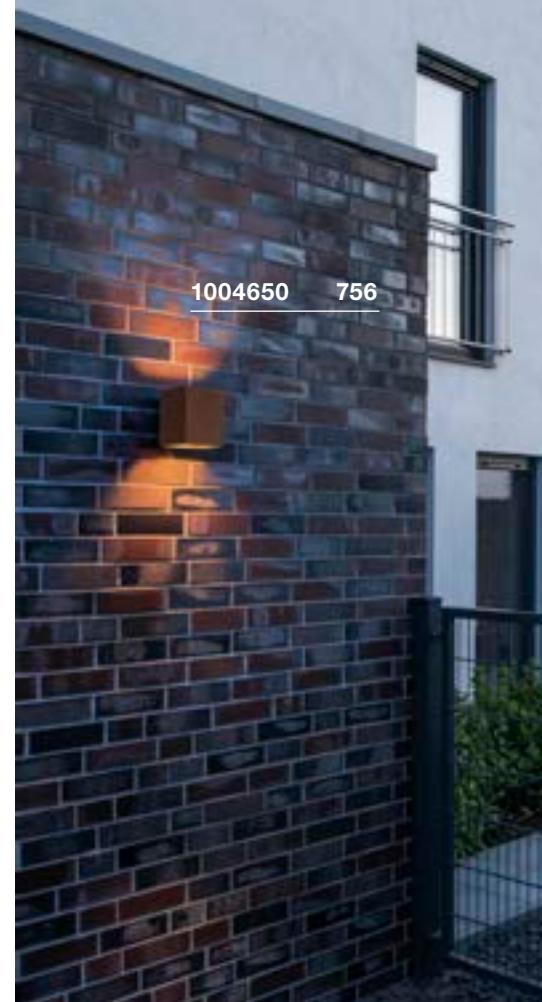





OVALISK SENSOR WL



OVALISK WL



220-240V ~50/60Hz | 500mA
Total wattage: 9.6W
Material: aluminium/glass



220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass



Down 580lm | 3000K | 630lm | 4000K



Down 580lm | 3000K | 630lm | 4000K

Options	Prod. no.
● anthracite	1004679

Options	Prod. no.
● anthracite	1004678





1004679 757



231015 758



1003453 759



220-240V ~50/60Hz

Total wattage: 3.8W

Material: aluminium/polycarbonate (PC)


- Protection rating IP55 only when mounted with light emission downwards.



Down




170lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	231015
<input type="radio"/> white	231010
<input checked="" type="radio"/> grey	231012

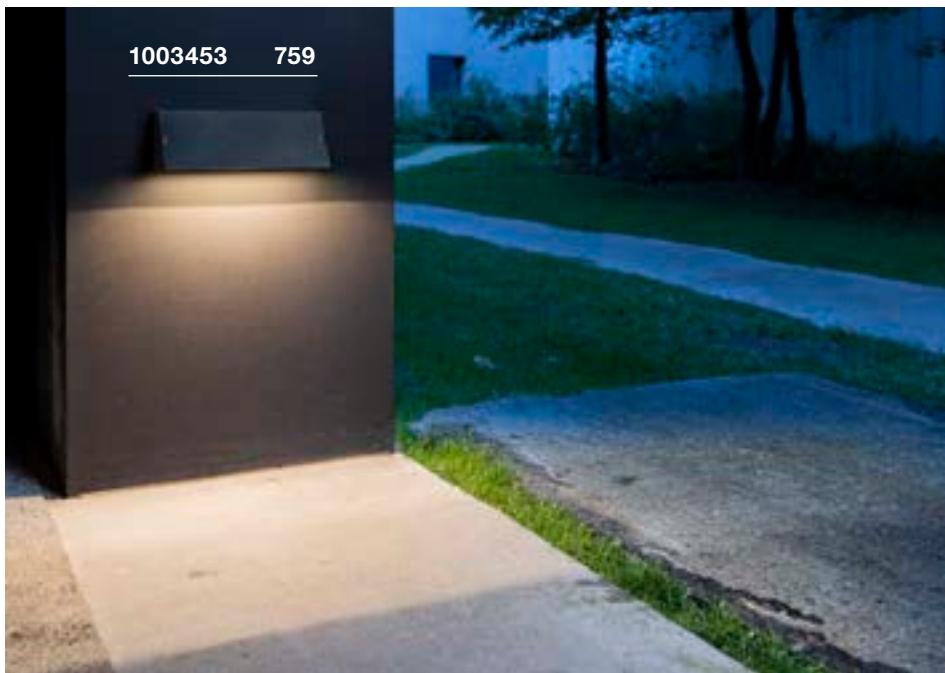

230034 759




PEMA®
WLPEMA®
WLPEMA®
WL, E27

220-240V ~50/60Hz
Total wattage: 7.7W
Material: aluminium/glass



100-277V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass



Down

640lm | 3000K



Down 1340lm | 3000K | 1420lm | 4000K



Base: 1xE27 Max. diameter: 4.5 cm L: 21 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1002069
<input type="radio"/> white	1002070

Options	Prod. no.
<input checked="" type="radio"/> black	1003453
<input type="radio"/> grey	1003454

Options	Prod. no.
<input checked="" type="radio"/> black	230030
<input type="radio"/> grey	230034



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h





Prod. no.: 1005289



FLATT SENSOR WL



FLATT WL




100-240V ~50/60Hz | 300mA
Total wattage: 13W
Material: aluminium/aluminium



Down 500lm | 3000K 550lm | 4000K

Options	Prod. no.
● anthracite 500 / 530lm	1002954
● anthracite/brown 500 / 550lm	1002955




100-240V ~50/60Hz | 300mA
Total wattage: 13W
Material: aluminium/aluminium



Down 500lm | 3000K 530lm | 4000K

Options	Prod. no.
● anthracite 500 / 530lm	1002952
● anthracite/brown 500 / 550lm	1002953



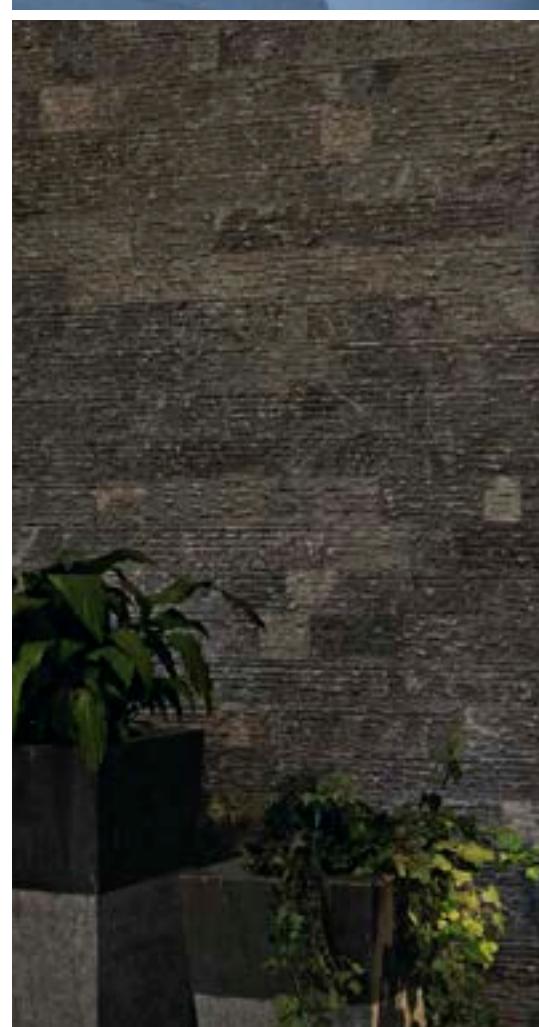




1002955 760



228775 761

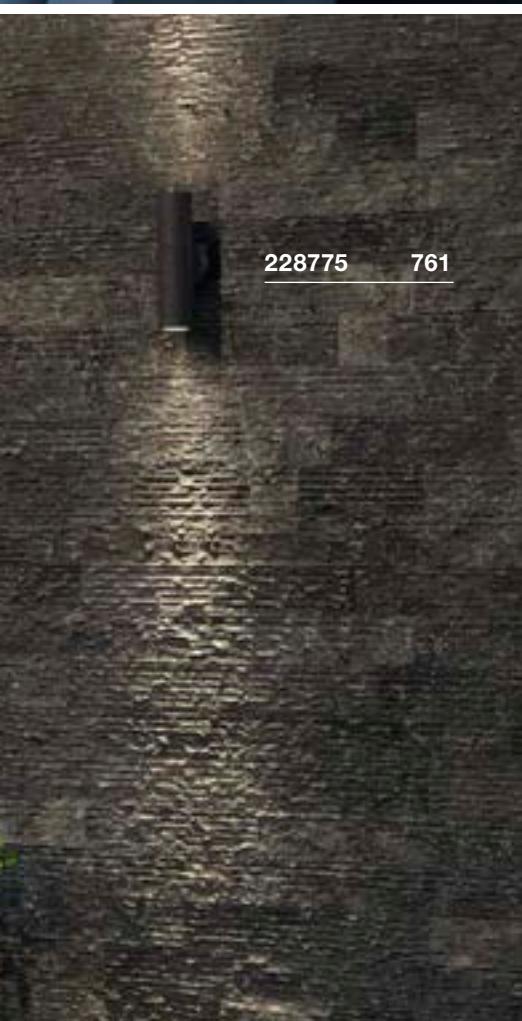ASTINA
WL, QPAR51220-240V ~50/60Hz
Material: aluminium/glassASTINA STEEL
WL, QPAR51220-240V ~50/60Hz
Material: stainless steel 304

<11 W

Base: 2xGU10 max. L: 9 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	228775
<input type="radio"/> white	228771
<input type="radio"/> aluminium	228776

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075



<35 W

Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	233302




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075

ANGOLUX SENSOR WL



ANGOLUX WL



100-240V ~50/60Hz | 240mA

Total wattage: 9.8W

Material: aluminium

- Detection angle 120°, max. detection distance 9m, sensitivity setting
- IP44 protection rating only when mounted with light emission downwards.



CRI
80

Down

750lm | 3000K



CRI
80


Down

550lm | 3000K


Options	Prod. no.
<input checked="" type="radio"/> anthracite	1001969
<input type="radio"/> white	1001970


Options	Prod. no.
<input checked="" type="radio"/> anthracite	231355
<input type="radio"/> white	231351

1001969 **762**

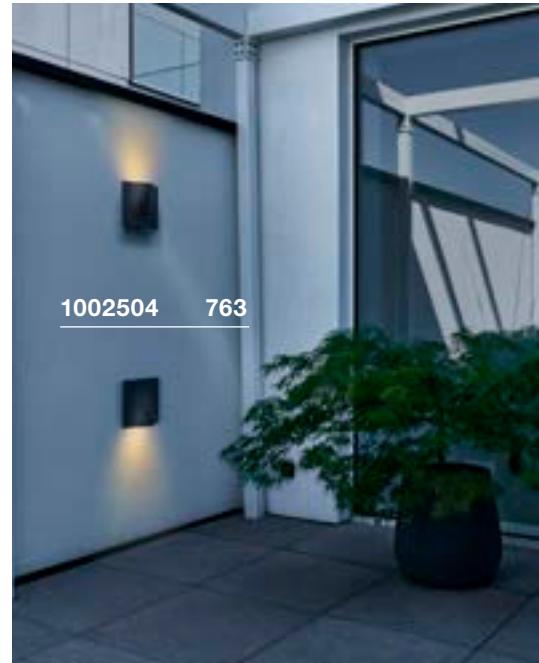


1002504 **763**


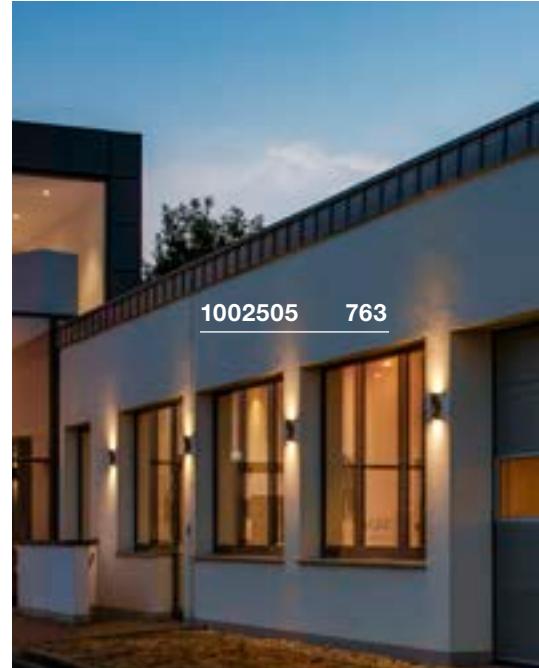


VILUA S
WL

100-277 V ~50/60 Hz | 700 mA
Total wattage: 9W
Material: aluminium/glass

VILUA L
WL

100-277V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/glass

VILUA
UP/DOWN, WL

100-277 V ~50/60 Hz | 700 mA
Total wattage: 16W
Material: aluminium/glass



Down

405lm | 3000K



Down

940lm | 3000K



Up

400lm | 3000K
400lm | 3000K

Options

Prod. no.

- anthracite

Options	Prod. no.
● anthracite	1002503

Options

Prod. no.

- anthracite

Options	Prod. no.
● anthracite	1002504



Options

Prod. no.

- anthracite

Options	Prod. no.
● anthracite	1002505

MYRA UP/DOWN WL, QPAR51



220-240V ~50/60Hz
Material: aluminium/glass

SOCKET INSIDE <35 W

Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● anthracite	233115
● grey	233114




LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077



Product	Prod. no.
Surface-mounting frames	
● anthracite	233215
● grey	233214

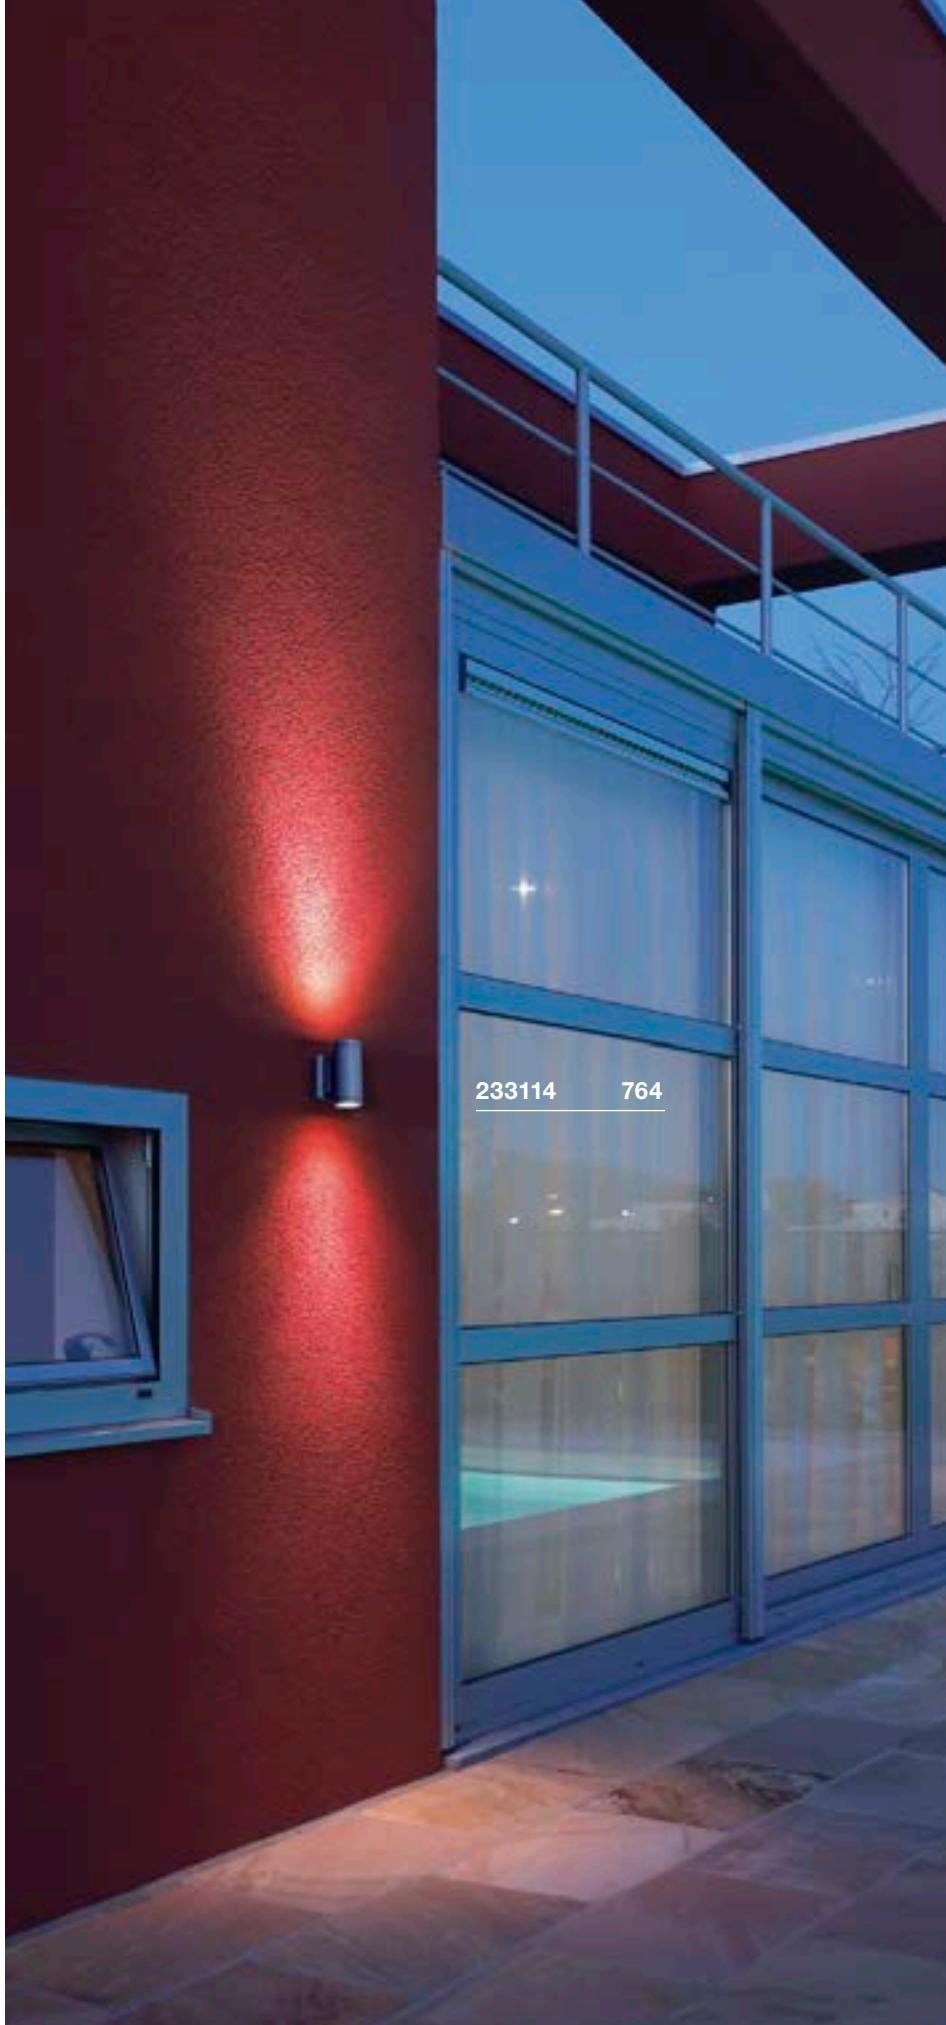




SITRA UP/DOWN WL

SITRA UP/DOWN WL, TCR-TSE


230362 **765**



220-240V ~50/60Hz
Total wattage: 18W
Material: aluminium/glass



Up 488lm | 3000K
Down 488lm | 3000K



220-240V ~50/60Hz
Material: aluminium/glass



Base: 2xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
● anthracite	1002018

Options	Prod. no.
● anthracite	230365



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: **1005271**






1000334 767



ROX
WL, QPAR111





220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass

DELWA
WL



220-240V ~50/60Hz | 700mA
Total wattage: 10W
Material: aluminium/glass



Base: 1xGU10



Base: 2xGU10



Down 840lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> aluminium	1000333

Options	Prod. no.
<input checked="" type="radio"/> aluminium	1000334

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1000342
<input type="radio"/> white	1000340



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278





QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278



SLOTS
WL





220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium/glass



Down 140lm | 3000K

Options	Prod. no.
● anthracite	231805
● rust	231807

WALLYX
WL, QPAR51



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xGU10 max. L: 7.6 cm

Options	Prod. no.
● anthracite	227195



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005077

227195 768









DOWNUNDER OUT WL, round



DOWNUNDER OUT WL, square



100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium



100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium



Down 150lm | 3000K | 160lm | 4000K



Down 150lm | 3000K | 160lm | 4000K




Options	Prod. no.
● anthracite	1002868

Options	Prod. no.
● anthracite	1002869


ABRIDOR SENSOR WL



ABRIDOR WL



100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium



100-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: aluminium



Down 950lm | 3000K | 980lm | 4000K







Down 950lm | 3000K | 980lm | 4000K

Options	Prod. no.
● anthracite	1002990

Options	Prod. no.
● anthracite	1002989

1002990 770

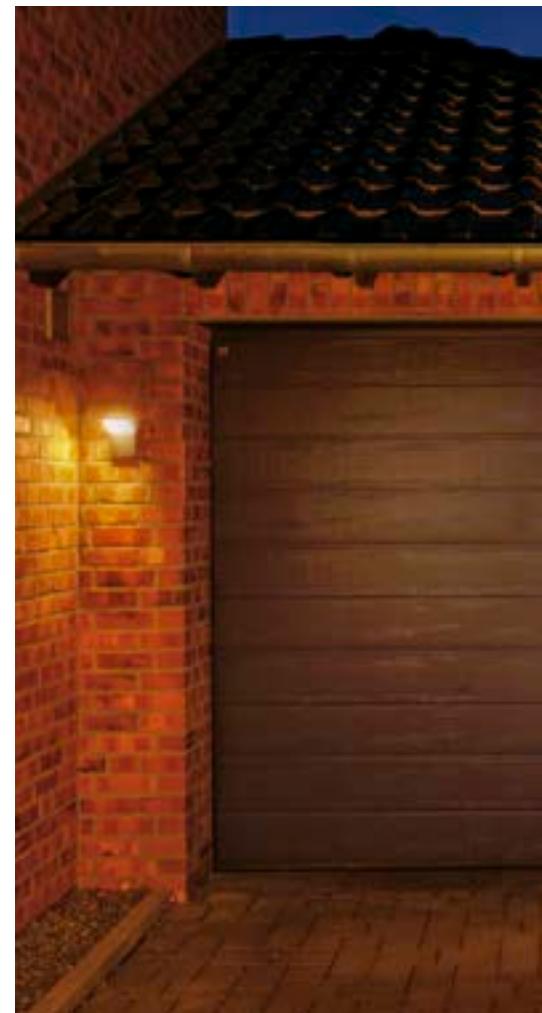


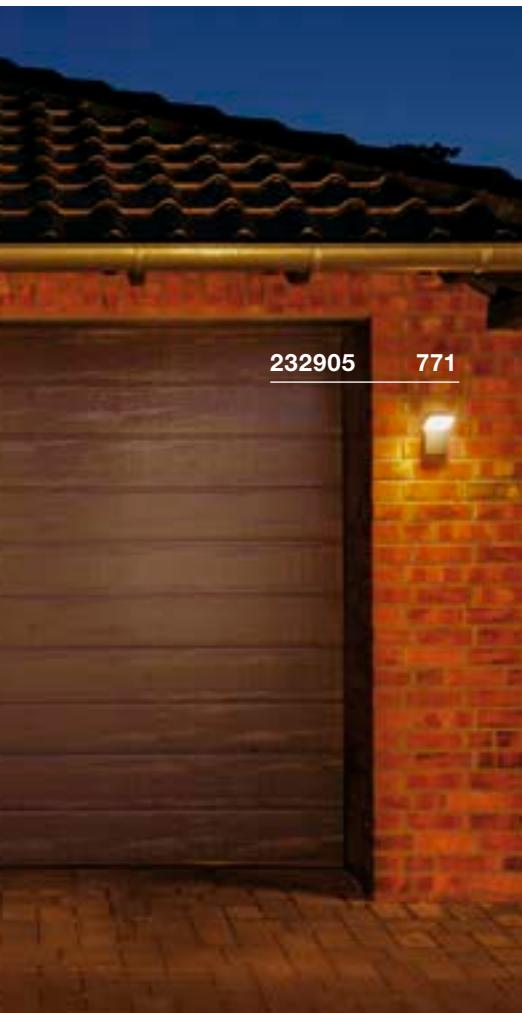ORDI SENSOR
WLORDI
WL

220-240V ~50/60Hz | 110mA

Total wattage: 9W

Material: aluminium



220-240V ~50/60Hz | 110mA

Total wattage: 9W

Material: aluminium



Down

740lm | 3000K







Down

740lm | 3000K


Options	Prod. no.
● anthracite	232915

Options	Prod. no.
● anthracite	232905

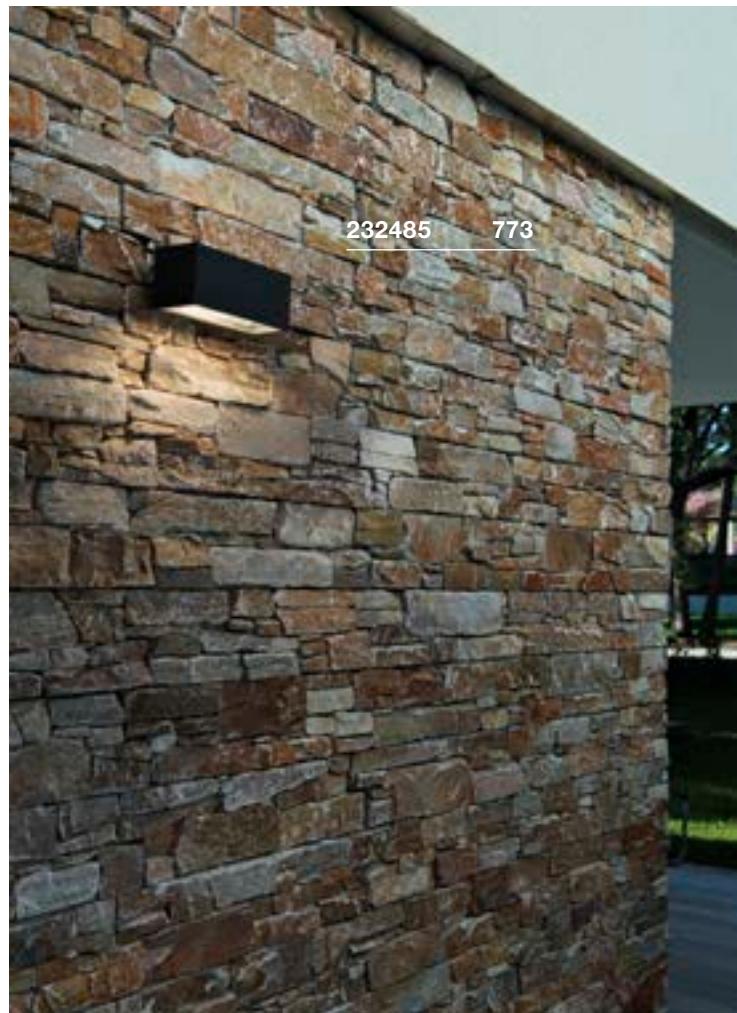


BOX-L
WL, E27BOX-L
WLBOX UP/DOWN
WL, QT-DE12

220-240V ~50/60Hz
Material: aluminium/acrylic



100-277V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/acrylic



220-240V ~50/60Hz
Material: aluminium

SOCKET INSIDE <18 W
Base: 1xE27 Max. diameter: 6 cm L: 17.5 cm

LED INSIDE CRI 90
Down 600lm | 3000K

SOCKET INSIDE <80 W
Base: 1xR7s 78mm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	232495
<input type="radio"/> white	232491
<input checked="" type="radio"/> rust	232497

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1002035

Options	Prod. no.
<input checked="" type="radio"/> anthracite	232485

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h
Prod. no.: 1005289



LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h
Prod. no.: 1005287




232101





775



1003539

775

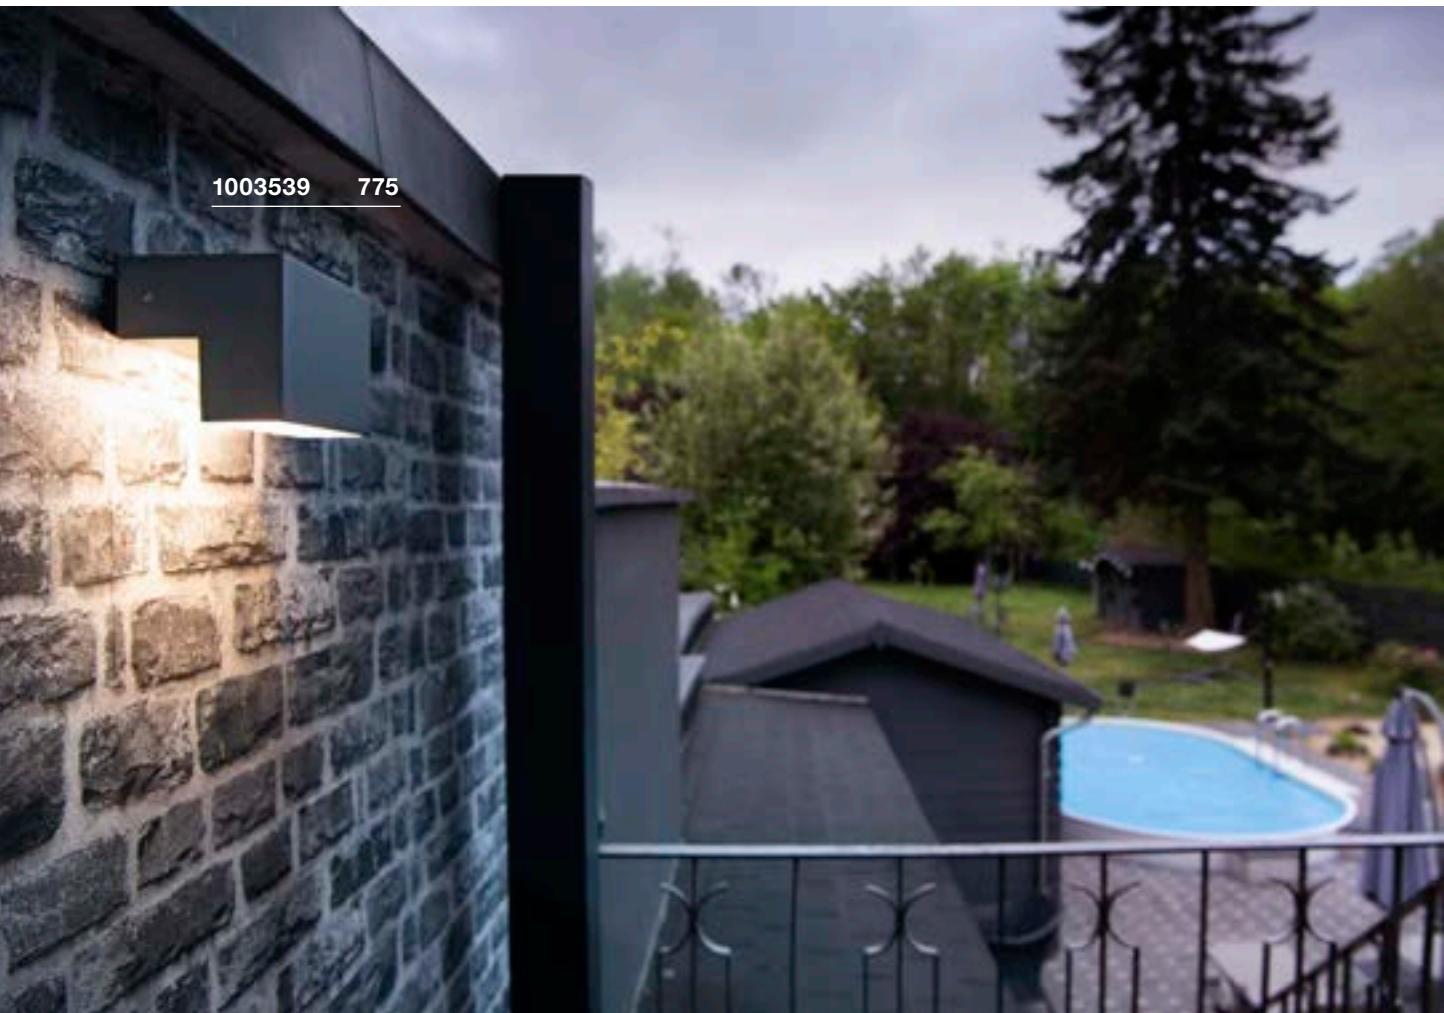


LOGS
WLOUT-BEAM UP /
FLOOD DOWN
WLL-LINE OUT
WL

220-240V ~50/60Hz | 500mA

Total wattage: 9.5W


Material: aluminium



220-240V ~50/60Hz | 500mA

Total wattage: 18W

Material: aluminium/glass



220-240V ~50/60Hz | 350mA

Total wattage: 7W

Material: aluminium/polycarbonate (PC)

Down 520lm | 3000K
800lm | 3000KUp 50lm | 3000K
Down 690lm | 3000K

Down 500lm | 3000K | 570lm | 4000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite 520lm	232105
<input type="radio"/> white 800lm	232101

Options	Prod. no.
<input checked="" type="radio"/> anthracite	229665
<input type="radio"/> grey	229664

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1003539



232045

777






PHOTONIA
WL, E27





220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass

GLOO PURE
WL, E27



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xE27 Max. diameter: 9 cm L: 15 cm



Base: 1xE27 Max. diameter: 6.5 cm L: 14.5 cm



Base: 1xE27 Max. diameter: 4.8 cm L: 18 cm

Options	Prod. no.
● anthracite	232045

Options	Prod. no.
● anthracite	1000820

Options	Prod. no.
● anthracite	1002002



	LED E27 7.5W 320° 2500K 700lm EEK=F 8kWh/1000h
Prod. no.: 1005265	

	A60 7.5W 320° 2700K 800lm EEK=F 8kWh/1000h
Prod. no.: 1005303	

	LED E27 8W 240° 4000K 920lm EEK=E 8kWh/1000h
Prod. no.: 1005290	

Product	Prod. no.
Spacer ● anthracite	1002853

F-POL
WL, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)



Base: 1xE27 Max. diameter: 5.1 cm L: 14 cm

Options	Prod. no.
● anthracite	231585




LED E27 | 8W | 240°
4000K | 920lm | EEK=E
8kWh/1000h

Prod. no.: 1005290





SQUARE
WL, E27



220-240V ~50/60Hz
Material: stainless steel 304



Base: 1xE27 Max. diameter: 7 cm L: 13 cm

Options	Prod. no.
● Stainless steel	1000336





A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



KERAS ELT
WL, E27



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)



Base: 1xE27 Max. diameter: 7 cm L: 17.5 cm

Options	Prod. no.
● anthracite	227176




A60 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no.: 1005303



SITRA
WL, TCR-TSE



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
● anthracite	230355






LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271

RASCALI
WL



IPERI
WL



220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium



220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium

- IP44 protection rating only when mounted with light emission downwards.



Down 330lm | 3000K

Options	Prod. no.
● anthracite	1000797



Down 400lm | 4000K

Options	Prod. no.
● black	231315









QUADRASYL
WL, TCR-TSE

SQUARE TURN
WL, G9

231315 781



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass

1000335 781



Base: 1xG53 Max. diameter: 7.5 cm L: 2.7 cm

Options	Prod. no.
● anthracite	232285

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h

Prod. no.: 1005271



Base: 1xG69 Max. diameter: 3.5 cm L: 8 cm

Options	Prod. no.
● grey	1000335

LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no.: 1005286

1002905 783



233134

783








TODAY PRO Display



ESKINA D Display, PHASE



MYRA DISPLAY WL, curved, QPAR51

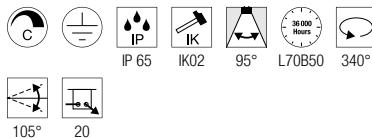

220-240V ~50/60Hz | 640mA
Total wattage: 29W
Material: aluminium

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

220-240V ~50/60Hz
Material: aluminium

- CCT switch on light body

CRI
70

Down 2800lm | 4000K

CRI
80

Down 1000lm | 3000K | 1000lm | 4000K

<50
W

Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
<input checked="" type="radio"/> black	1000880
<input type="radio"/> white	1000881

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1002905

Options	Prod. no.
<input checked="" type="radio"/> anthracite	233135
<input type="radio"/> grey	233134



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h




Prod. no.: 1005077



Product	Prod. no.
Surface-mounting frames	
<input checked="" type="radio"/> anthracite	233215
<input type="radio"/> grey	233214




1004649 785

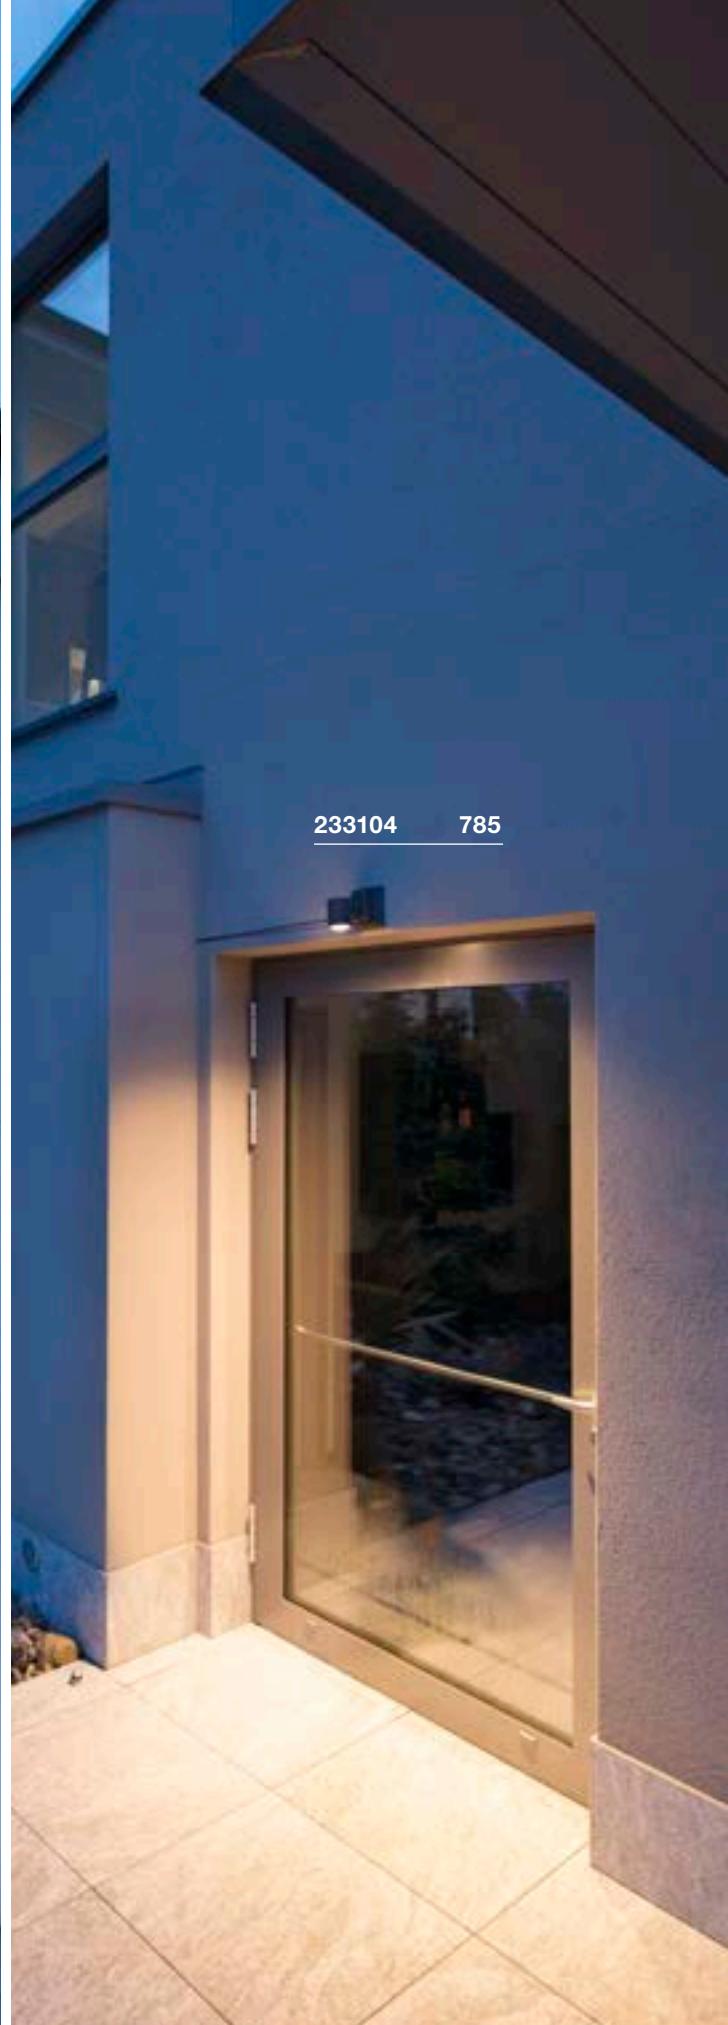

233104 785



LED SPOT SP



IP 55 IK06 40° L80B50 330° 180°

100-240V ~50/60Hz | 240mA
 Total wattage: 6W
 Material: aluminium/glass




Down

400lm | 3000K

Options	Prod. no.
● anthracite	1004649
● rust	1004957

NAUTILUS WL QPAR51



<11 W
 IP 54 IK02 330° 180°

220-240V ~50/60Hz
 Material: aluminium



Base: 1xGU10 Max. diameter: 5.1 cm L: 8.3 cm

Options	Prod. no.
● black	1002867




LED GU10 51mm | 6W | 38°
 2700K | 450lm | EEK=F
 6kWh/1000h

Prod. no.: 1005077



MYRA CW, single, QPAR51



<50 W
 IP 55 IK02 340° 45°

220-240V ~50/60Hz
 Material: aluminium/glass



Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● anthracite	233105
● grey	233104



LED GU10 51mm | 6W | 38°
 2700K | 450lm | EEK=F
 6kWh/1000h

Prod. no.: 1005077



Product Prod. no.
 NAUTILUS | Mounting plate
 ● black 1002884



Product Prod. no.
 Surface-mounting frames
 ● anthracite 233215
 ● grey 233214

1003427 793



**SOCKET**

PHOTONI | 789

**LED**

S-CUBE | 791

**LED**

ESKINA FRAME | 791

**LED**ENOLA
OCULUS | 792**LED**ENOLA
ROUND S | 793**LED**ENOLA
ROUND M | 793**LED**ENOLA
ROUND L | 793**LED**ENOLA
SQUARE S | 795**LED**ENOLA
SQUARE M | 795**LED**ENOLA S
QUARE L | 795**LED**

BIG THEO | 797

**SOCKET**

BIG THEO | 797

**LED**

OVALISK | 797

**SOCKET**

PHOTONIA | 799

**SOCKET**

MOLAT | 799

**SOCKET**

SITRA | 801


**SOCKET**

ROX | 801

**SOCKET**

ROX | 801



1007586 789

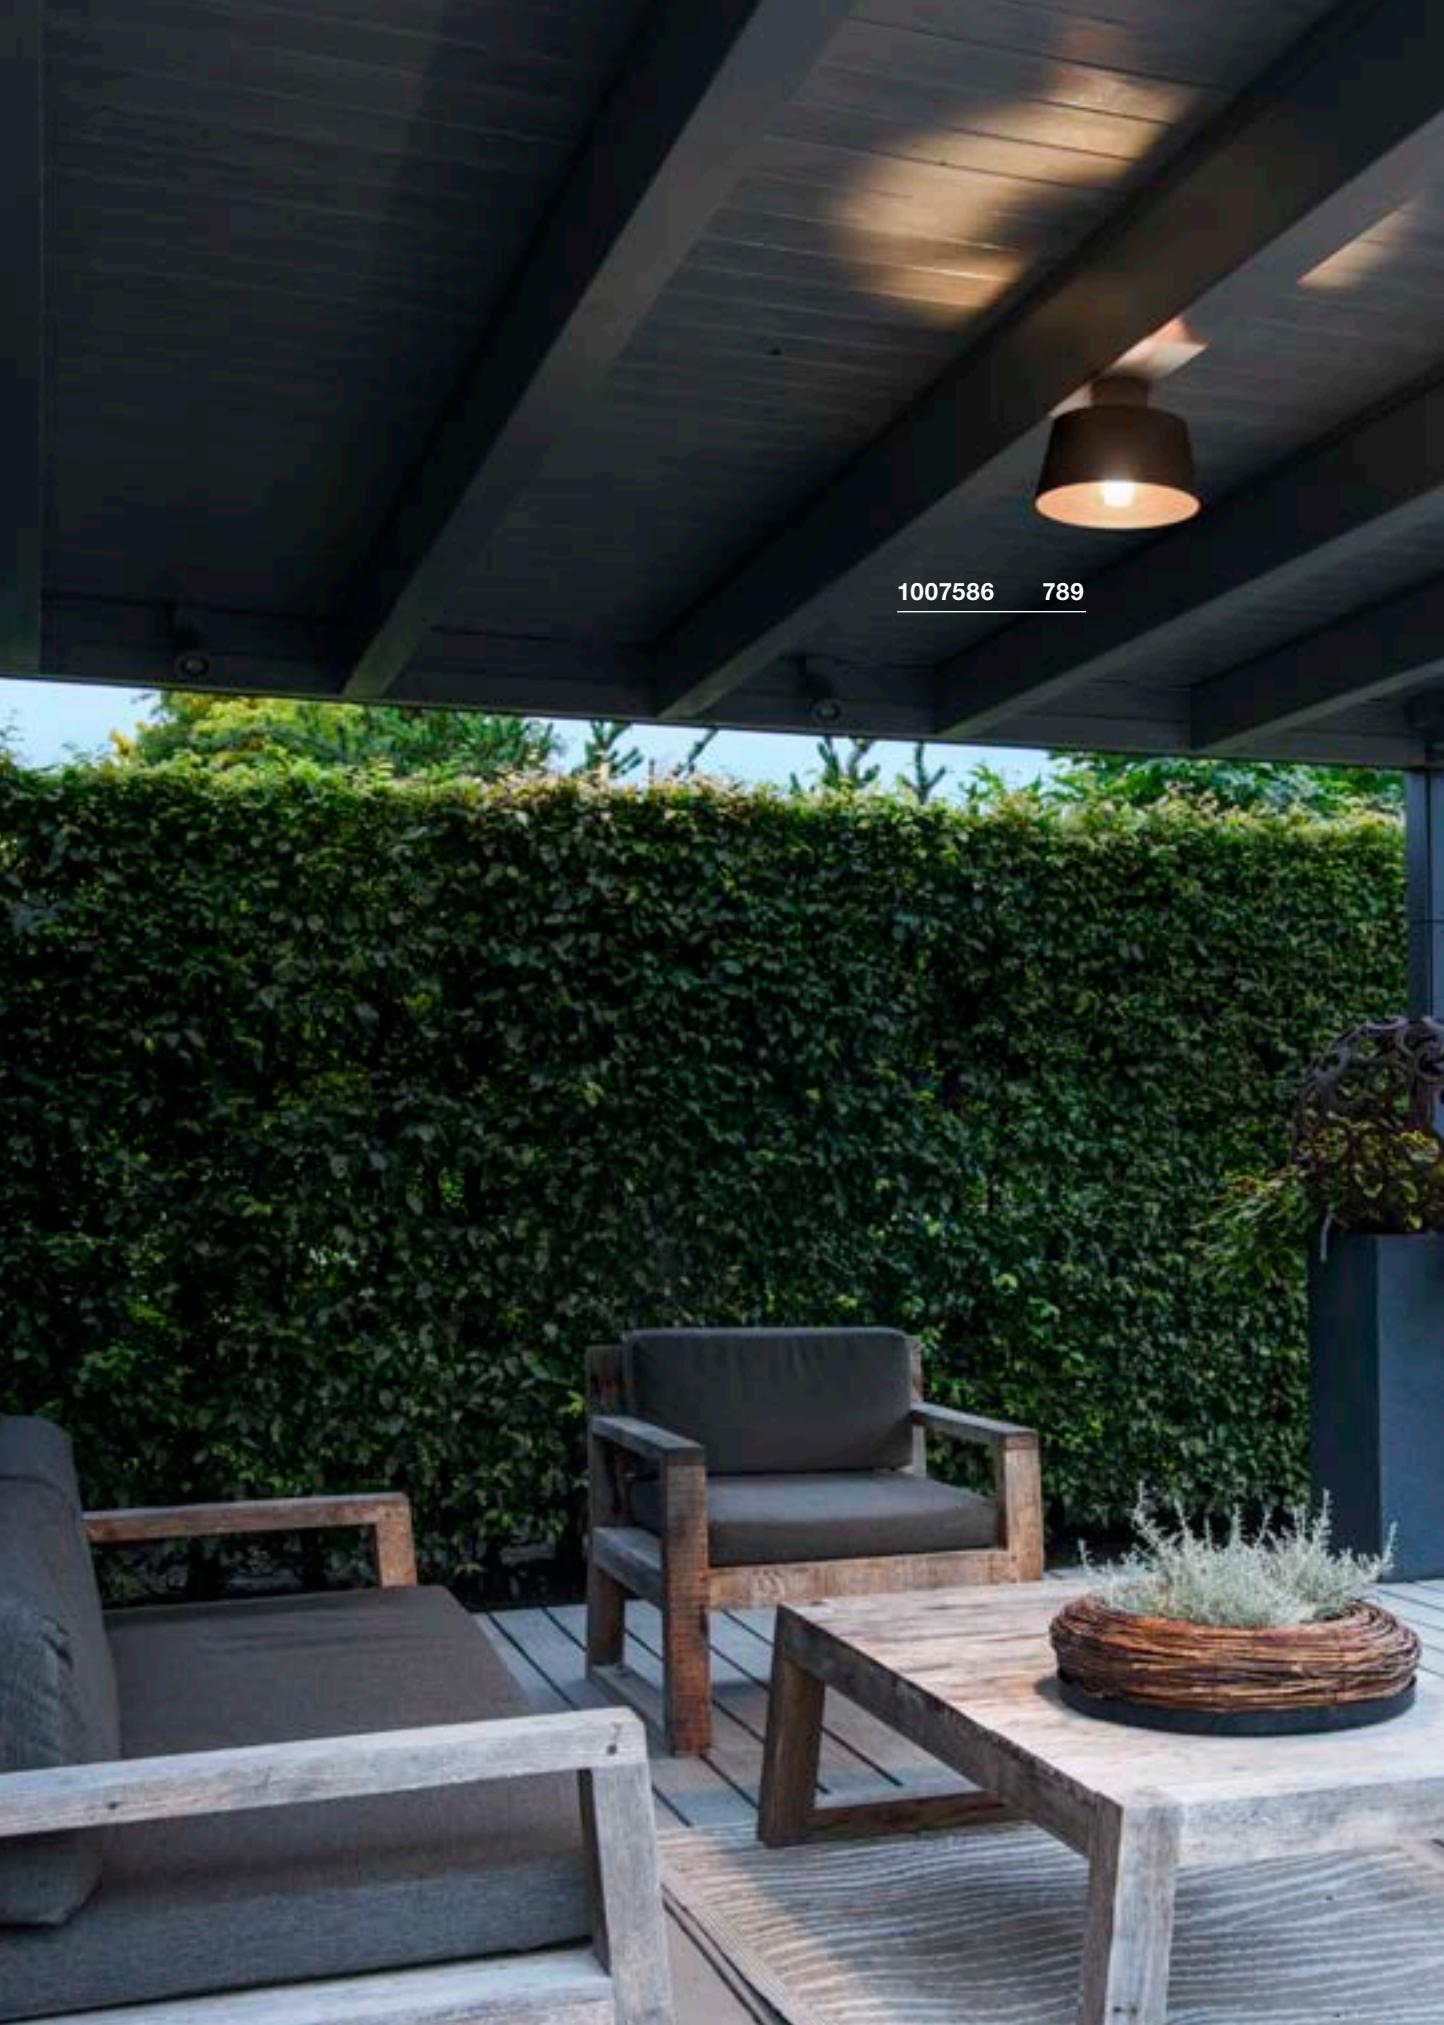



PHOTONI
CL, E27

NEW



220-240V ~50/60Hz
Material: aluminium

- sea-air-resistant

SOCKET
INSIDE 13
W

Base: 1xE27 Max. diameter: 6 cm L: 11.6 cm

Options	Prod. no.
● black	1007586
● rust	1007582



LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289



1007461 791








S-CUBE
CL



ESKINA FRAME
CL, single



220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium



220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/glass



Down 1000lm | 2700K 1200lm | 3000K





Down 1100lm | 3000K 1200lm | 4000K

Options	Prod. no.
● anthracite	1007461

Options	Prod. no.
● anthracite	1006316

ENOLA OCULUS CL



220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass



Down 1000lm | 3000K | 1100lm | 4000K

Options	Prod. no.
● anthracite	1006327




Product	Prod. no.
Spacer	1003479





ENOLA ROUND S CL





220-240V ~50/60Hz | 500mA

Total wattage: 9W

Material: aluminium/glass

ENOLA ROUND M CL





220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

ENOLA ROUND L CL



220-240V ~50/60Hz | 900mA

Total wattage: 36W

Material: aluminium/glass



Down 540lm | 3000K | 610lm | 4000K



Down 840lm | 3000K | 960lm | 4000K



Down 3200lm | 3000K | 3500lm | 4000K

Options	Prod. no.
● anthracite	1003426

Options	Prod. no.
● anthracite	1003427

Options	Prod. no.
● anthracite	1003442



Product	Prod. no.
Spacer	
● anthracite	1003479



Product	Prod. no.
Spacer	
● anthracite	1003479
Lens 19°	
● black	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207





Product	Prod. no.
Spacer	
● anthracite	1003479

1003421 795





ENOLA SQUARE S CL





220-240V ~50/60Hz | 500mA

Total wattage: 9W

Material: aluminium/glass

ENOLA SQUARE M CL





220-240V ~50/60Hz | 500mA

Total wattage: 11W

Material: aluminium/glass

ENOLA SQUARE L CL



220-240V ~50/60Hz | 900mA

Total wattage: 36W

Material: aluminium/glass



Down 540lm | 3000K | 610lm | 4000K



Down 840lm | 3000K | 960lm | 4000K



Down 3200lm | 3000K | 3500lm | 4000K

Options	Prod. no.
● anthracite	1003420

Options	Prod. no.
● anthracite	1003421

Options	Prod. no.
● anthracite	1003439



Product	Prod. no.
Spacer	
● anthracite	1003479



Product	Prod. no.
Spacer	
● anthracite	1003479
Lens 19°	
● black	1005205
Asymmetrical lens	
● black/chrome	1005206
Reflector 60°	
● chrome	1005207



Product	Prod. no.
Spacer	
● anthracite	1003479

234535 **797**



1004677 **797**








BIG THEO CL



BIG THEO CL, QPAR111



OVALISK CL



100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz | 350mA
Total wattage: 7.9W
Material: aluminium/glass



Down

2000lm | 3000K



Base: 1xGU10



Down

540lm | 3000K

570lm | 4000K

Options	Prod. no.
● anthracite	234535

Options	Prod. no.
● anthracite	229555
○ white	229551
● grey	229554

Options	Prod. no.
● anthracite	1004677



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278



232055 **799**









PHOTONIA
CL, E27

MOLAT
CL, E27

1000823 799



220-240V ~50/60Hz
Material: aluminium/glass

220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xE27 Max. diameter: 9 cm L: 15 cm

Base: 1xE27 Max. diameter: 6.5 cm L: 14.5 cm

Options	Prod. no.
● anthracite	232055

Options	Prod. no.
● anthracite	1000823

	LED E27 7.5W 320° 2500K 700lm EEK=F 8kWh/1000h		LED E27 7.5W 320° 2500K 700lm EEK=F 8kWh/1000h
	Prod. no.: 1005265		Prod. no.: 1005265

Product	Prod. no.
Spacer	
● anthracite	1002853


231545 801



231541 801



1000332 801

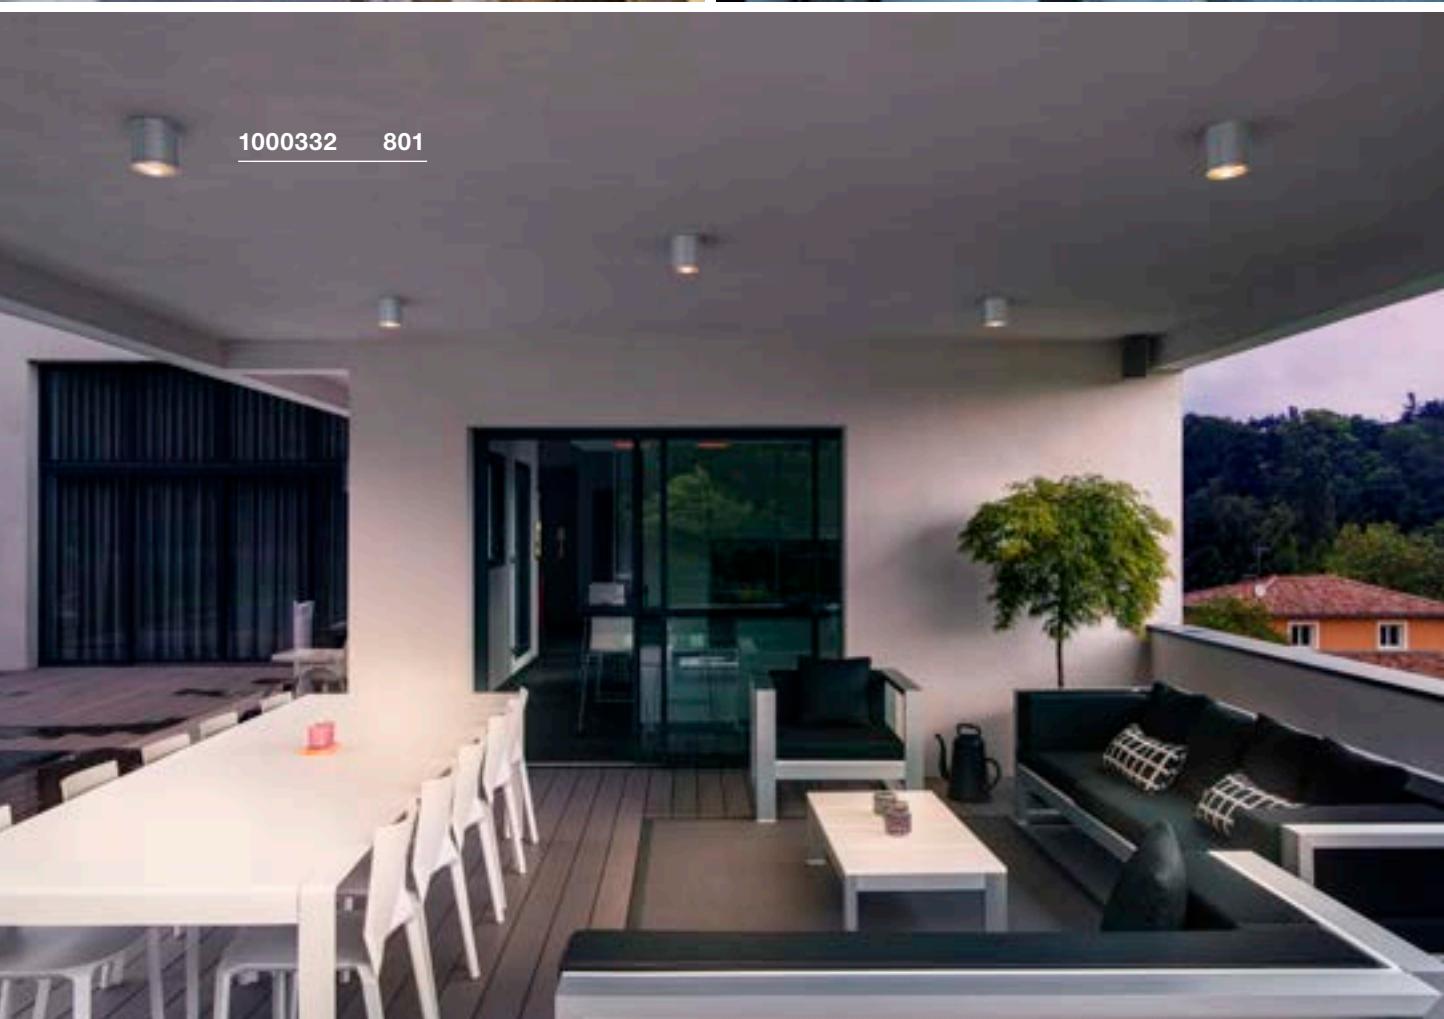






SITRA
CL, TCR-TSE



ROX
CL, QPAR111



ROX
CL, GX53



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
<input checked="" type="radio"/> anthracite	231545
<input type="radio"/> white	231541



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xGU10

Options	Prod. no.
<input checked="" type="radio"/> aluminium	1000332



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
<input checked="" type="radio"/> aluminium/trans-parent	1000339



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h



Prod. no.: 1005271



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h



Prod. no.: 1005278



LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h



Prod. no.: 1005271

1005202 811



**LED**

R-CUBE | 805

**LED**

S-CUBE | 805

**SOCKET**

S-TUBE | 805

**LED**ESKINA SPOT
SENSOR | 807**LED**

ESKINA SPOT | 807

**SOCKET**

SITRA 360 | 808

**SOCKET**

THEO BRACKET | 808

**LED**

HELIA | 809

**LED**

HELIA | 809

**SOCKET**

MYRA | 811

**LED**OUT-BEAM
FRAME | 811**LED**

QUADRULO | 811

**LED**

AINOS | 812-813

**LED**

AINOS | 813

**LED**

AINOS | 813

**LED**

RUBA | 814

**SOCKET**

BULAN | 815

**SOCKET**

BULAN GRID | 815

**LED**


TERANG 200 | 817

**LED**

IMPERVA | 817





1007511 805

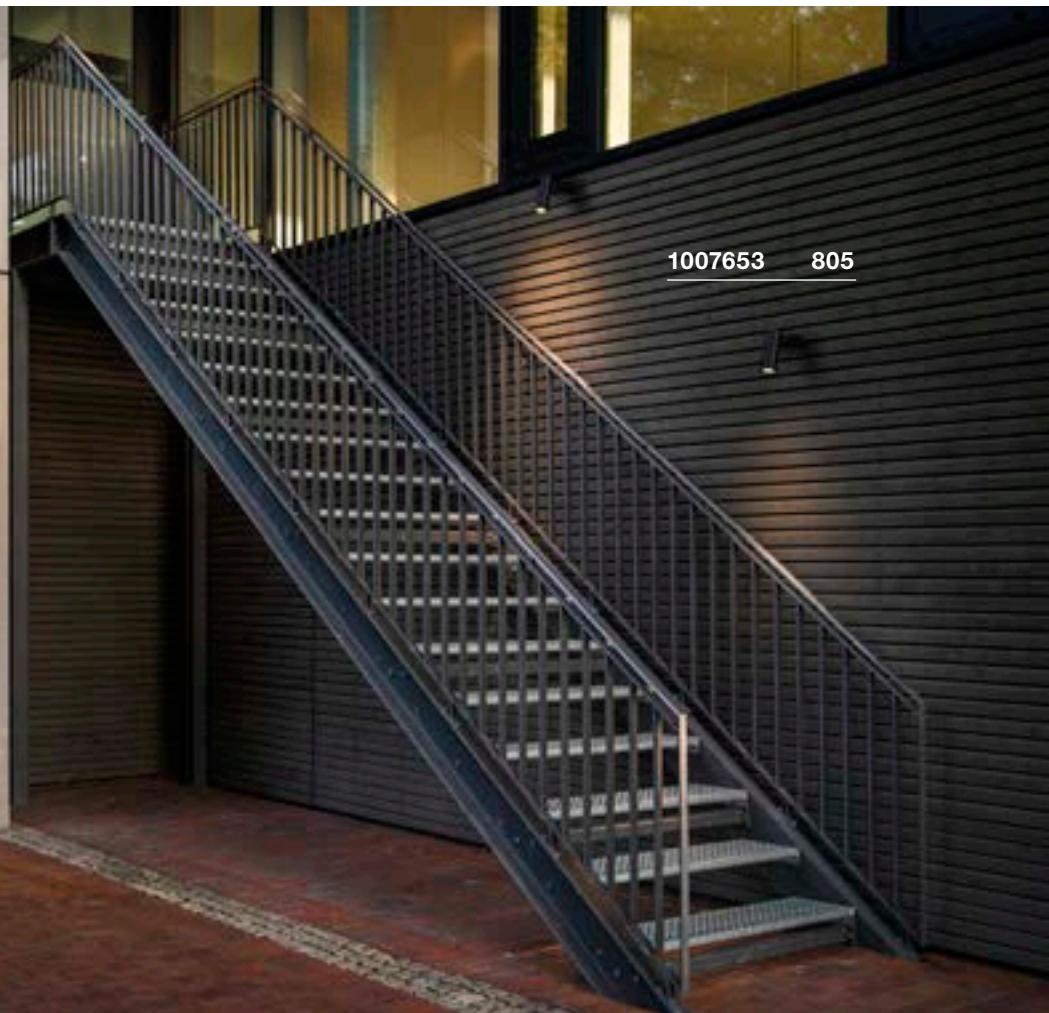





R-CUBE CW





220-240V ~50/60Hz | 350mA
 Total wattage: 15W
 Material: aluminium

S-CUBE CW



220-240V ~50/60Hz | 350mA
 Total wattage: 15W
 Material: aluminium

S-TUBE CW



220-240V ~50/60Hz
 Material: aluminium



CRI 80

Down 800lm | 2700K | 800lm | 3000K



CRI 80

Down 1000lm | 2700K | 1200lm | 3000K



Base: 1xGU10 Max. diameter: 5 cm L: 5,5 cm

Options	Prod. no.
● anthracite	1007511

Options	Prod. no.
● anthracite	1007458

Options	Prod. no.
● black	1007653




LED GU10 51mm | 6W | 38°
 2700K | 450lm | EEE=F
 6kWh/1000h



Prod. no.: 1005077

1002904 **807**



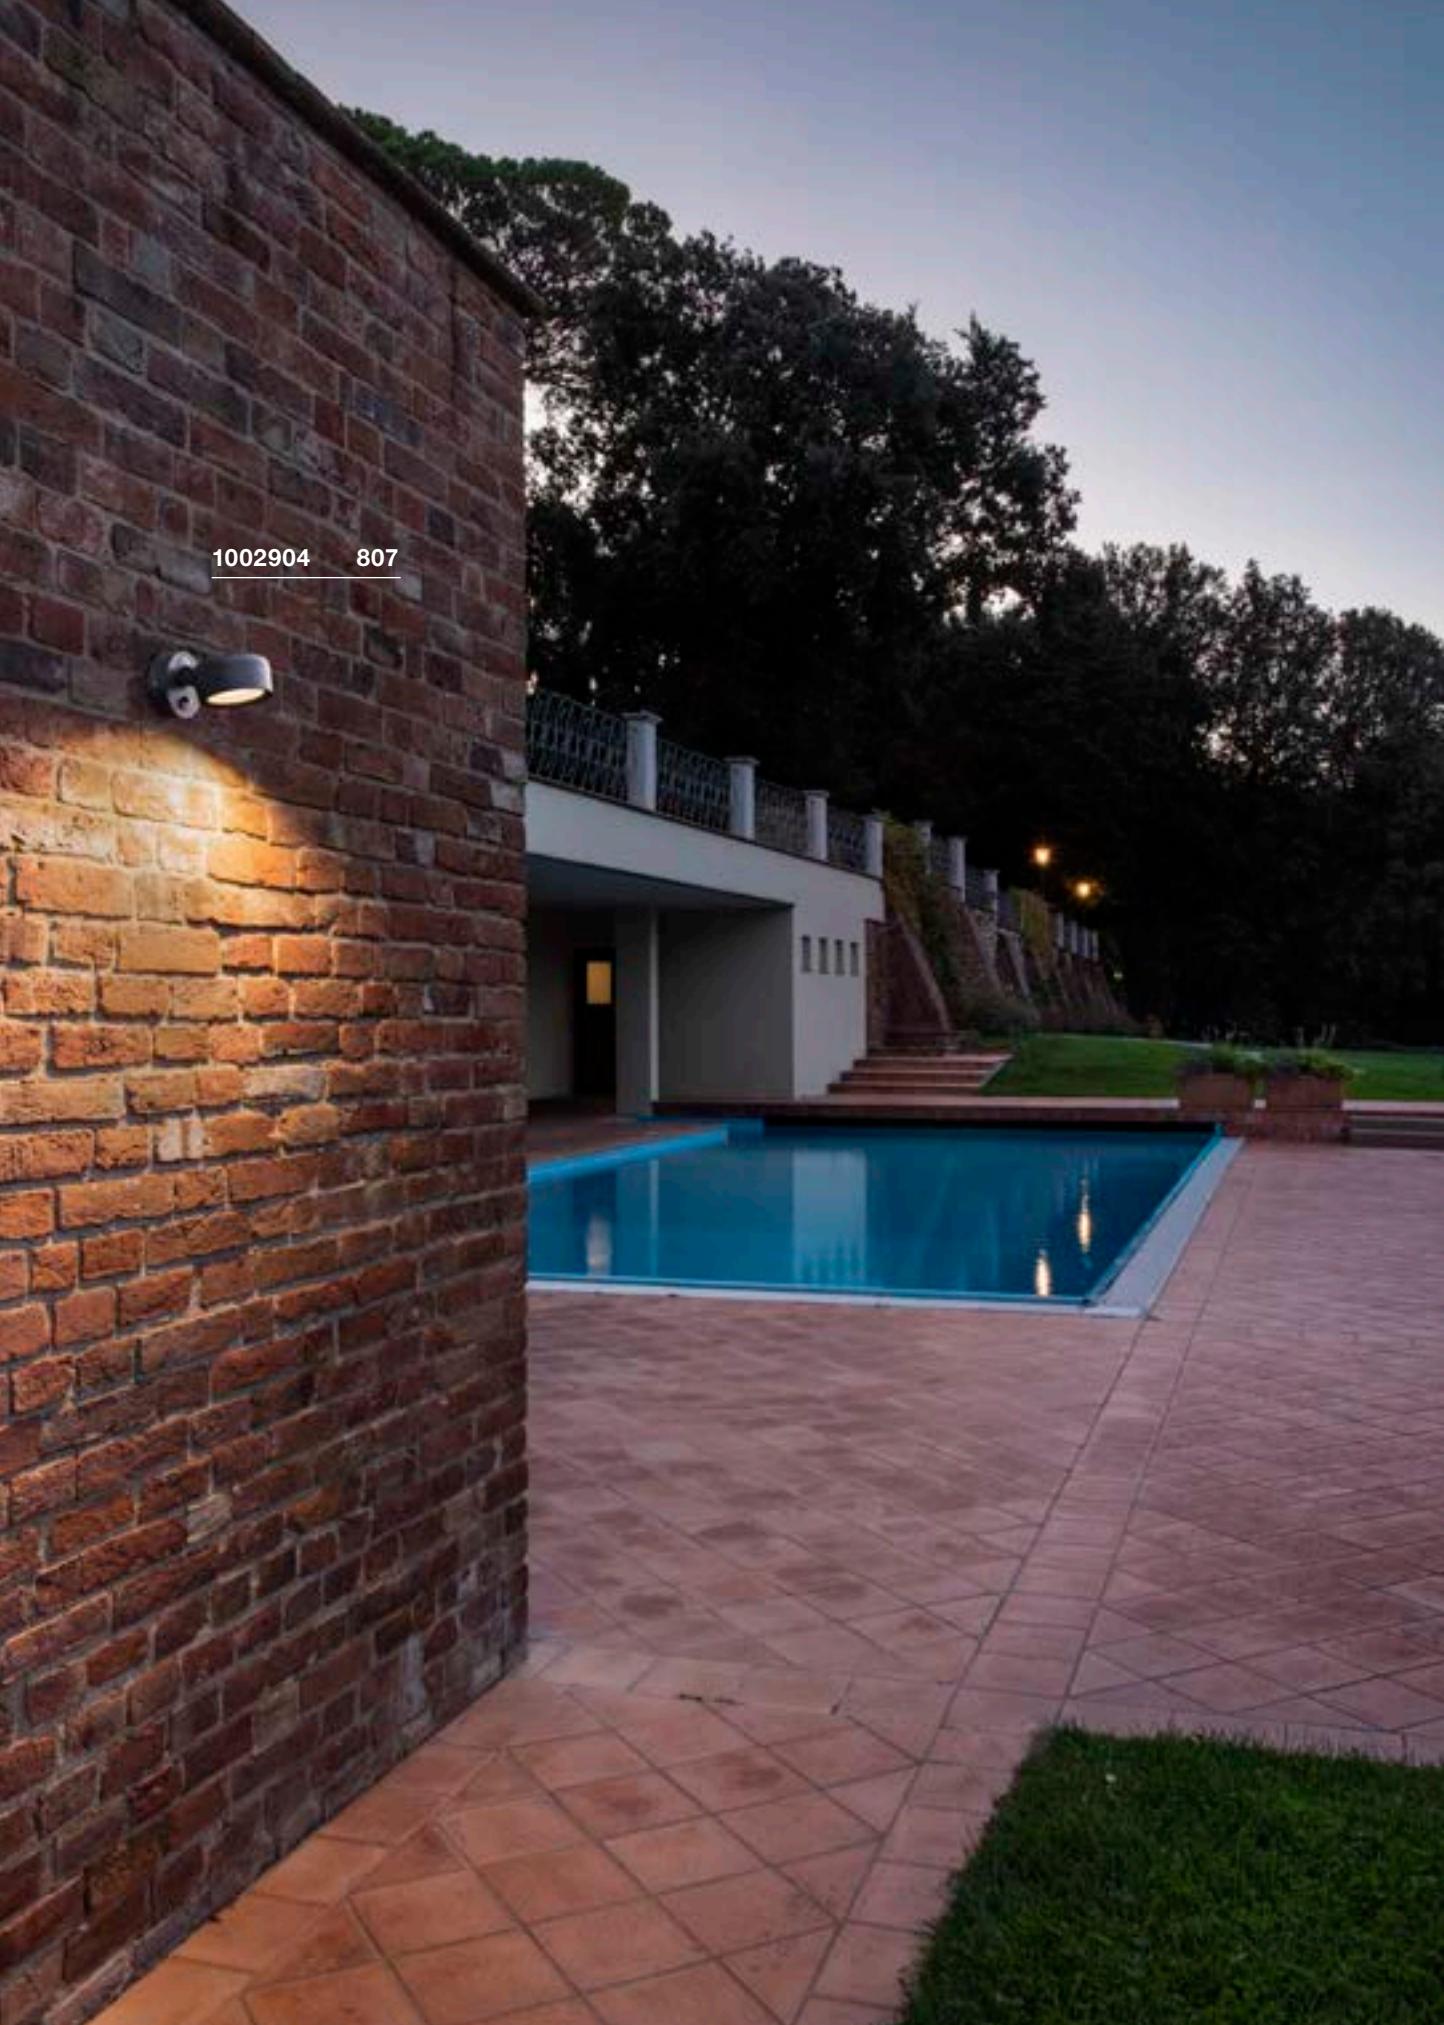




ESKINA SPOT SENSOR CW, PHASE




ESKINA SPOT CW, PHASE

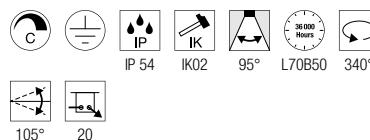

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

- Motion sensor in the wall rosette.



220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium



Down 1000lm | 3000K | 1000lm | 4000K





Down 1000lm | 3000K | 1000lm | 4000K

Options	Prod. no.
● anthracite	1002904

Options	Prod. no.
● anthracite	1002903

SITRA 360 CW, TCR-TSE



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xG53 Max. diameter: 7.5 cm L: 3.5 cm

Options	Prod. no.
● anthracite	231515





LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h



Prod. no.: 1005271

THEO BRACKET CW



220-240V ~50/60Hz
Material: aluminium/glass



Base: 1xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● anthracite	1004653



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: 1005077




233245 809





1004653 808

HELIA
CW, single, PHASEHELIA
CW, double, PHASE

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium/glass


CRI
80

Down 440lm | 3000K

Options	Prod. no.
● anthracite	233245



Product	Prod. no.
Spacer	
● anthracite	1002853



220-240V ~50/60Hz | 500mA
Total wattage: 13W
Material: aluminium/glass

CRI
80

Down 880lm | 3000K

Options	Prod. no.
● anthracite	233255



Product	Prod. no.
Spacer	
● anthracite	1002853

1003519 **811**



1005202 **811**









MYRA
WL, double, QPAR51

OUT-BEAM FRAME
SP

QUADRULO
CL



220-240V ~50/60Hz
Material: aluminium/glass



100-240V ~50/60Hz | 700mA
Total wattage: 3.5W
Material: aluminium/acrylic



100-277V ~50/60Hz | 480mA
Total wattage: 7.5W
Material: aluminium/acrylic



Base: 2xGU10 Max. diameter: 5.1 cm L: 5.7 cm

Options	Prod. no.
● anthracite	233095
○ grey	233094



Down 60lm | 3000K



Down 230lm | 3000K

Options	Prod. no.
● anthracite	1003518
○ white	1003519

Options	Prod. no.
● anthracite	1005202



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEE=F
6kWh/1000h





Prod. no.: **1005077**



Product	Prod. no.
Spacer	
● anthracite	1002853

AINOS
CW



220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)



Down

1430lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	229965
<input type="radio"/> white	229961







AINOS CW SENSOR



AINOS CW, square




AINOS CW SENSOR, square




220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/polycarbonate (PC)

- Sensor in the light housing.



220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium/polycarbonate (PC)



220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

- Sensor in the light housing.



Down 1430lm | 3000K



Down 1300lm | 3000K | 1300lm | 4000K



Down 1300lm | 3000K | 1300lm | 4000K


Options	Prod. no.
<input checked="" type="radio"/> anthracite	229975
<input type="radio"/> white	229971

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1003450
<input type="radio"/> white	1003449

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1003452
<input type="radio"/> white	1003451

RUBA CW

cct



220-240V ~50/60Hz | 600mA

Total wattage: 22W

Material: polycarbonate (PC)



Down 960lm | 3000K
2000lm | 2300lm | 4000K

Options	Prod. no.
<input type="radio"/> white Ø: 27cm 960 / 1100lm 12W	1005089
<input type="radio"/> white Ø: 42cm 2000 / 2300lm 22W	1005090







BULAN
CW, E14




BULAN GRID
CW, E27



220-240V ~50/60Hz
Material: aluminium/glass



220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

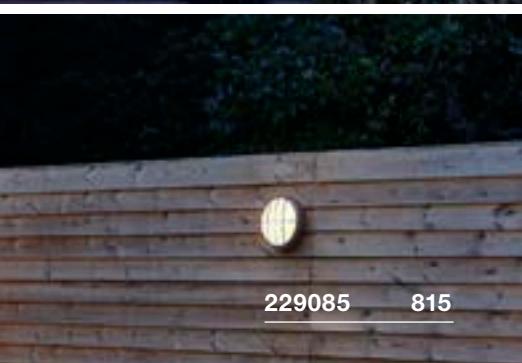

229085 **815**



Base: 1xE14 Max. diameter: 4.8 cm L: 13 cm

Options	Prod. no.
● anthracite	229075
○ white	229071
● grey	229072



Base: 2xE27 Max. diameter: 5.2 cm L: 17.3 cm

Options	Prod. no.
● anthracite	229085
○ white	229081



C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: **1005285**



| 13.5W | 240°
4000K | 1600lm | EEK=E
14kWh/1000h

Prod. no.: **1005308**





A photograph of a modern, light-colored house at night. The exterior features a series of small, circular windows along the facade. In the foreground, a path leads to the entrance, flanked by well-maintained, brightly lit hedges. To the right, a large glass door reveals a warmly lit interior space, possibly a kitchen or dining area, with a long table and chairs. The sky above is a deep, clear blue.



229935 817




**TERANG 200
CW**



**IMPERVA 120
CW**



220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/polycarbonate (PC)



220-240V ~50/60Hz | 700mA
Total wattage: 40W
Material: polycarbonate (PC)



CRI
80

Down

830lm | 3000K



CRI
80

Down

4600lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite	229935
<input type="radio"/> white	229931

Options	Prod. no.
<input checked="" type="radio"/> grey	1001314



233605 823





1006406 821





1006407 821





CONCRETO EL, Wing



100-240V ~50/60Hz | 700mA
Total wattage: 3.2W
Material: concrete/aluminium

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included





Down

45lm | 3000K

Options	Prod. no.
● grey	1006406 ●

CONCRETO EL, Cut

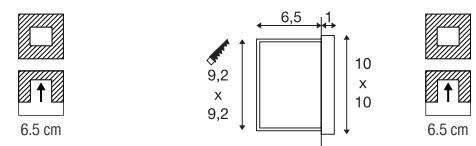

100-240V ~50/60Hz | 700mA
Total wattage: 3.2W
Material: concrete/aluminium



- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included



Down

15lm | 3000K

Options	Prod. no.
● grey	1006407 ●



100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit must be ordered separately



Down 940lm | 3000K

Options	Prod. no.
● anthracite	233635





Product	Prod. no.
Recessed fixing kit	
● black	233639





DOWNUNDER OUT S EL





220-240V ~50/60Hz | 300mA

Total wattage: 1.7W

Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

DOWNUNDER OUT M EL





220-240V ~50/60Hz | 300mA

Total wattage: 4W

Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

DOWNUNDER OUT L EL



220-240V ~50/60Hz | 300mA

Total wattage: 4W

Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards
- Recessed fixing kit included

CRI
80Down 25lm | 3000K
65lmCRI
80Down 85lm | 3000K
155lmCRI
80

Down 85lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> anthracite 25lm	233605
<input type="radio"/> white 65lm	233601


Options	Prod. no.
<input checked="" type="radio"/> anthracite 85lm	233625
<input type="radio"/> white 155lm	233621

Options	Prod. no.
<input checked="" type="radio"/> anthracite	233615



233650

825

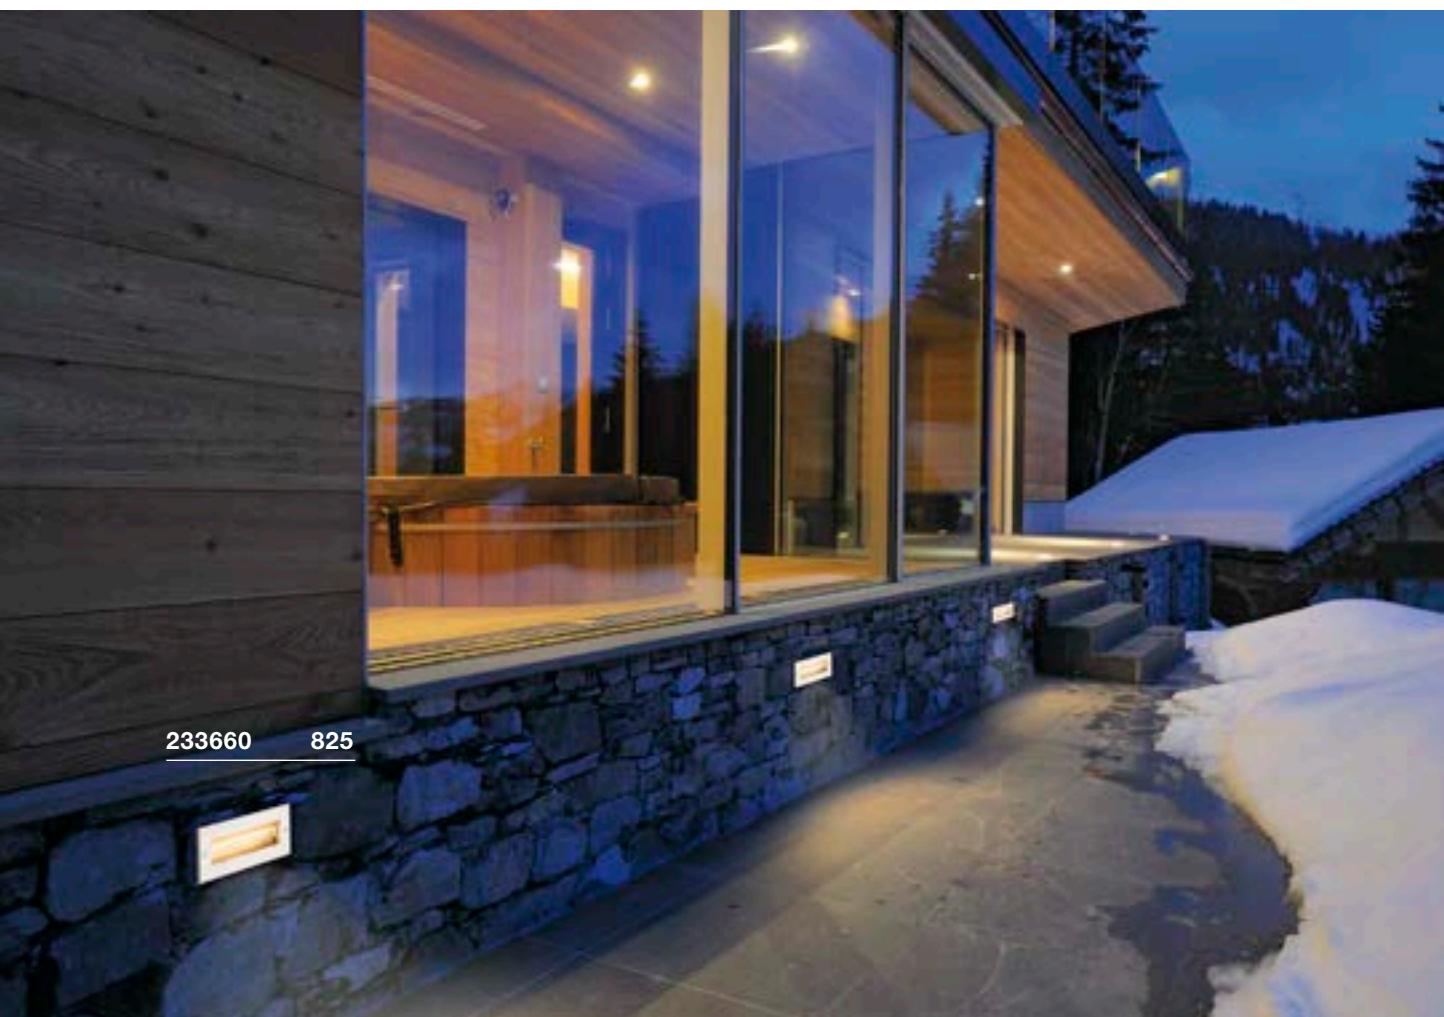

233660

825







BRICK MESH EL



BRICK EL, symmetrical




BRICK EL, asymmetrical




100-240V ~50/60Hz | 24V
Total wattage: 3.3W
Material: stainless steel 316/glass

- Recessed fixing kit included



220-240V ~50/60Hz | 144mA
Total wattage: 9.5W
Material: aluminium/stainless steel 316

- Recessed fixing kit included



220-240V ~50/60Hz | 144mA
Total wattage: 9.5W
Material: aluminium/stainless steel 316

- Recessed fixing kit included



Down 52lm | 3000K



Down 950lm | 3000K



Down 850lm | 3000K

Options	Prod. no.
● Stainless steel	229110

Options	Prod. no.
● Stainless steel	233650

Options	Prod. no.
● Stainless steel	233660







229062 827




BRICK DOWNUNDER EL, E14

BRICK DOWNUNDER EL



220-240V ~50/60Hz
Material: aluminium/glass

- No recessed fixing kit required



220-240V ~50/60Hz
Total wattage: 1.4W
Material: aluminium/glass

- Recessed fixing kit included



Base: 1xE14 Max. diameter: 4.3 cm L: 12 cm



30lm | 3000K

Options	Prod. no.
● grey	229062

Options	Prod. no.
● grey	229702



C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no.: 1005285





1006106 839








 LED DASAR® 600 831	 LED DASAR® 1200 831	 LED DASAR® S 833	 LED DASAR® S 833	 LED DASAR® L 835	 LED DASAR® L 835
 LED DASAR® XL 837	 LED DASAR® XL 837	 LED DASAR® FLAT 80 839	 LED DASAR® FLAT 120 839	 LED DASAR® 255 839	 LED DASAR® 920 840
 LED DASAR® 920 840	 LED DASAR® 270 841	 LED DASAR® 270 841	 SOCKET DASAR® 115 843	 SOCKET DASAR® 115 843	 SOCKET DASAR® 115 843
 SOCKET DASAR® EXACT 116 845	 SOCKET DASAR® EXACT 116 845	 SOCKET DASAR® 215 846	 SOCKET DASAR® 215 846	 SOCKET DASAR® 215 847	 LED DASAR® 215 847
 LED TRAIL-LITE® 60 848	 LED POWER TRAIL-LITE® 849	 LED POWER TRAIL-LITE® 849	 LED GIMBLE OUT 849	 LED SMALL PLOT 851	 LED SMALL PLOT 851
 LED SMALL PLOT 851	 LED SMALL PLOT 851	 LED BIG PLOT 853	 LED BIG PLOT 853	 LED BIG PLOT 853	 LED BIG PLOT 853
 LED ROCCI 854	 LED ROCCI 854	 LED ROCCI 200 855	 LED ROCCI 200 855	 SOCKET SOLASTO 857	 SOCKET SOLASTO 857



1007196 831




DASAR® 600 EL



220-240V ~50/60Hz | 550mA
 Total wattage: 18W
 Material: stainless steel 316

- with connector

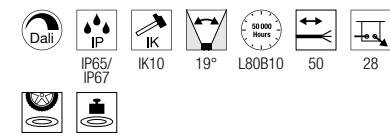

220-240V ~50/60Hz | 900mA
 Total wattage: 34W
 Material: stainless steel 316

- with connector



Up 2200lm | 3000K



Up 4100lm | 3000K

Options	Prod. no.
● Stainless steel	1007195

Options	Prod. no.
● Stainless steel	1007196

Product	Prod. no.
Recessed fixing kit ● black	1007198

Product	Prod. no.
Recessed fixing kit ● black	1007197





1007680 833





DASAR® S
RL, round




DASAR® S
RL, square



15 cm



15 cm




220-240V ~50/60Hz | 200mA

Total wattage: 4W

Material: aluminium

- IP connection box



220-240V ~50/60Hz | 200mA

Total wattage: 4W

Material: aluminium

- IP connection box



Up

350lm | 3000K



Up

350lm | 3000K

Options	Prod. no.
● anthracite	1007680

Options	Prod. no.
● anthracite	1007681



Product	Prod. no.
Floor-recessed fixing kit S	
● black	1007682
Reflector 15°	
● silver	1007683
Reflector 36°	
● silver	1007684
Reflector 50°	
● silver	1007685



Product	Prod. no.
Floor-recessed fixing kit S	
● black	1007682
Reflector 15°	
● silver	1007683
Reflector 36°	
● silver	1007684
Reflector 50°	
● silver	1007685







1007243 835



DASAR® L RL, round




DASAR® L RL, square

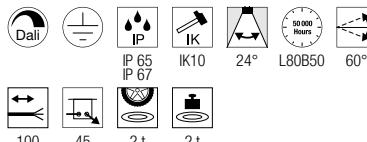

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium

- with Y connector

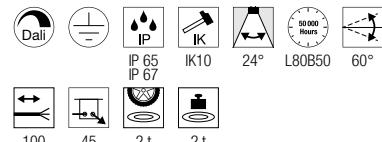

220-240V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium

- with Y connector

CRI
80

Up

1950lm | 3000K

CRI
80

Up

1950lm | 3000K

Options	Prod. no.
● Stainless steel	1007243


Options	Prod. no.
● black	1007244



Product	Prod. no.
Recessed fixing kit for DASAR L	
● black	1007245
Reflector 15° for L / XL	
● silver	1007238
Reflector 36° for L / XL	
● silver	1007239
Reflector 60° for L / XL	
● silver	1007240



Product	Prod. no.
Recessed fixing kit for DASAR L	
● black	1007245
Reflector 15° for L / XL	
● silver	1007238
Reflector 36° for L / XL	
● silver	1007239
Reflector 60° for L / XL	
● silver	1007240

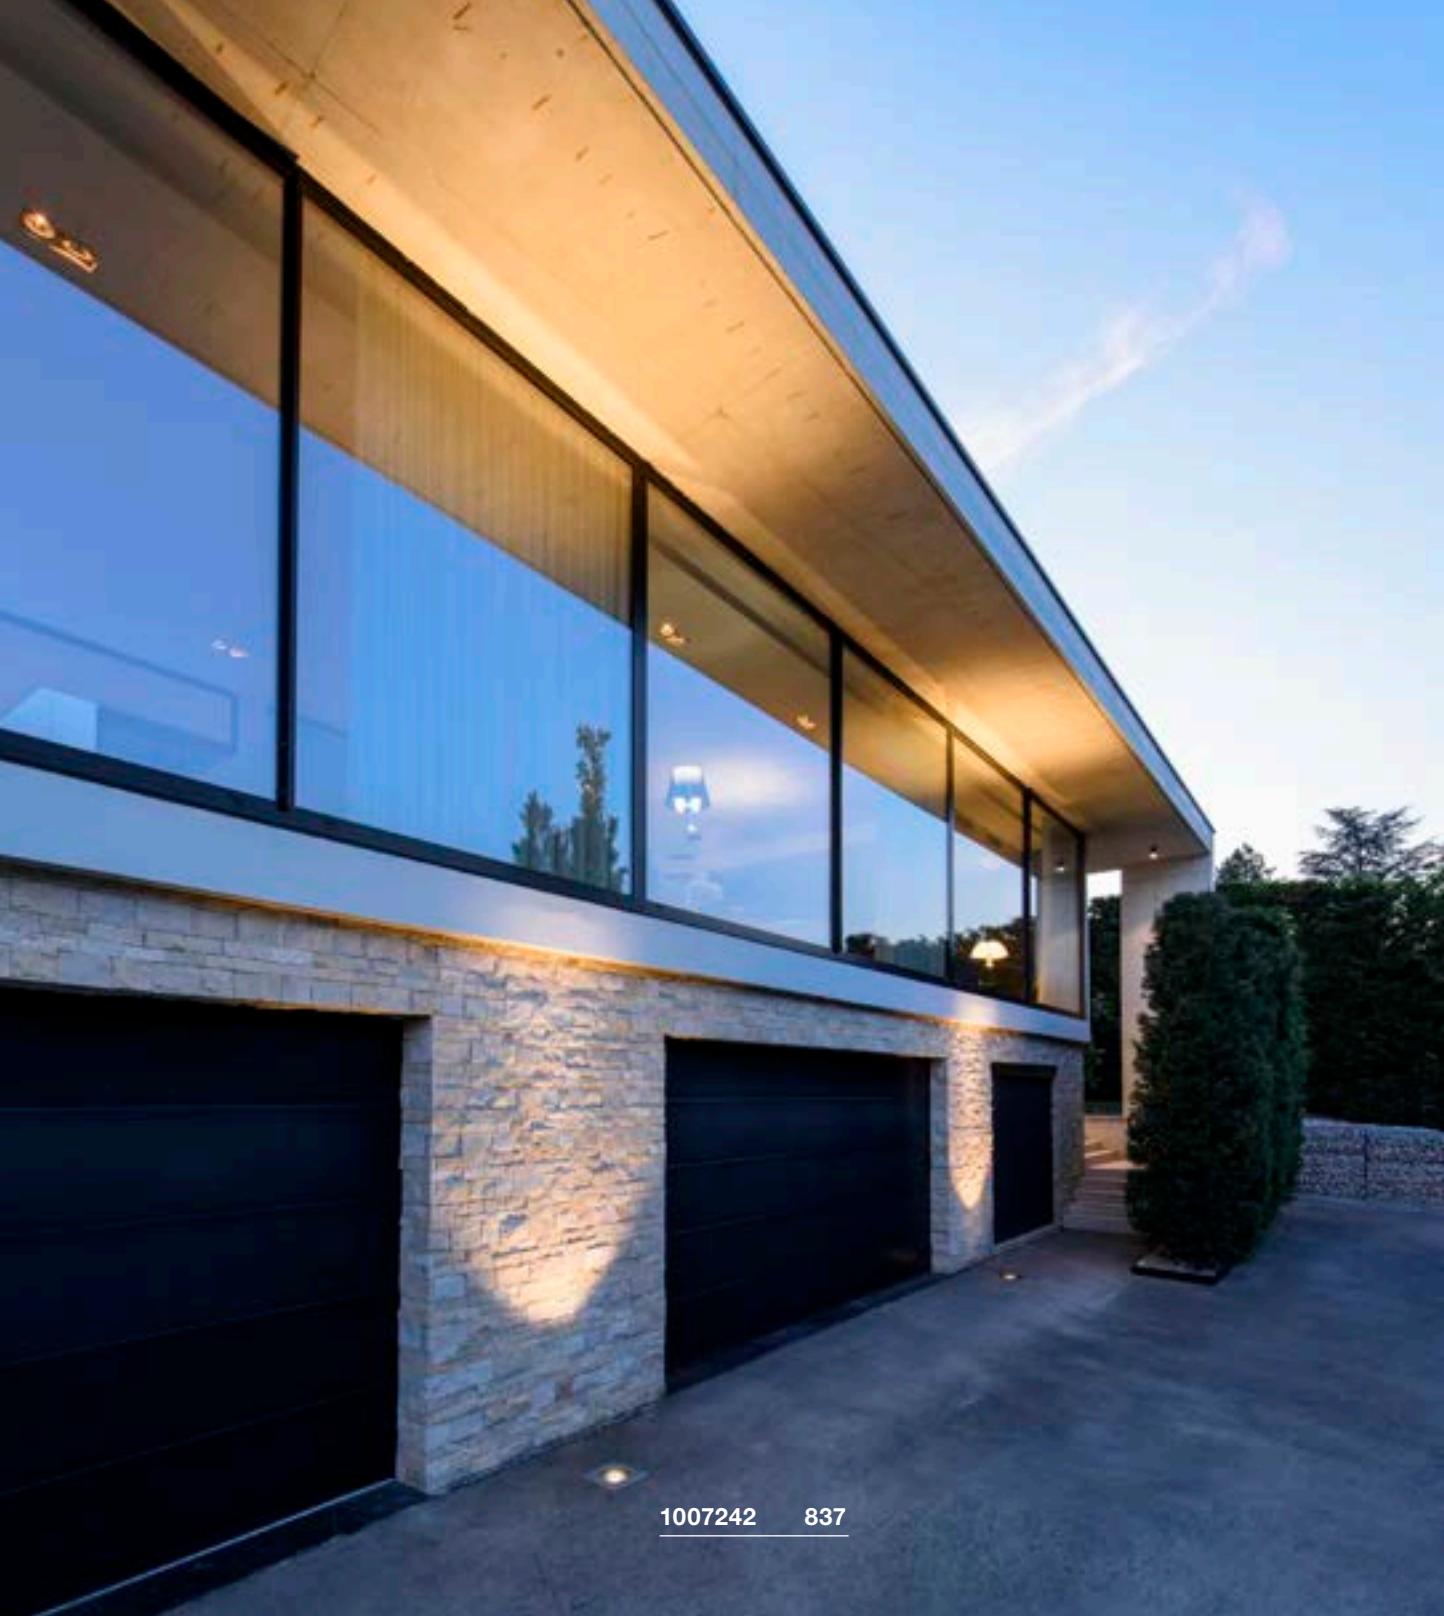






1007242 837



DASAR® XL
RL, round



DASAR® XL
RL, square

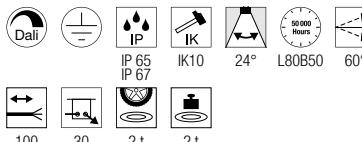

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

- with Y connector

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

- with Y connector



CRI 80

Up

2790lm | 3000K



CRI 80

Up

2790lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	1007241

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	1007242



Product	Prod. no.
Recessed fixing kit for DASAR XL	
<input checked="" type="radio"/> black	1007246
Reflector 15° for L / XL	
<input checked="" type="radio"/> silver	1007238
Reflector 36° for L / XL	
<input checked="" type="radio"/> silver	1007239
Reflector 60° for L / XL	
<input checked="" type="radio"/> silver	1007240



Product	Prod. no.
Recessed fixing kit for DASAR XL	
<input checked="" type="radio"/> black	1007246
Reflector 15° for L / XL	
<input checked="" type="radio"/> silver	1007238
Reflector 36° for L / XL	
<input checked="" type="radio"/> silver	1007239
Reflector 60° for L / XL	
<input checked="" type="radio"/> silver	1007240



228412 839



229383 839







DASAR® FLAT 80 EL



DASAR® FLAT 120 EL



DASAR® 255 EL




220-240V ~50/60Hz

Total wattage: 3.5W

Material: stainless steel 304/glass

- Both IP protection classes have been met.
- This light is suitable for installation in wood.
- Open cable end



220-240V ~50/60Hz | 350mA

Total wattage: 7W

Material: stainless steel 304/aluminium

- Open cable end



220-240V ~50/60Hz | 750mA

Total wattage: 31W

Material: stainless steel 316/glass

- Both IP protection classes have been met.



CRI 80

Up 140lm | 3000K



CRI 80

Up 490lm | 3000K
540lm | 4000K

CRI 90

Up 1660lm | 3000K
1720lm | 4000K

Options Prod. no.

Stainless steel 228412

Options Prod. no.

Stainless steel 1006106

Options Prod. no.

Stainless steel 229383

Stainless steel 1006107

Stainless steel 229381



Product Prod. no.





Connection box IP68, 3-pole

black 228730

DASAR® 920 EL



DASAR® 920 EL



12-24V
Total wattage: 6.5W
Material: stainless steel 316/glass

- Open cable end



CRI
80

Up 520lm | 3000K

Options	Prod. no.
● Stainless steel	233500



CRI
80

Up 300lm | 3000K

Options	Prod. no.
● Stainless steel	233520








Product	Prod. no.
LED power supply 15W 12V ○ white	1005444
LED power supply 15 W 24V ○ white	1005445





DASAR® 270
EL, asymmetrical



DASAR® 270
EL, symmetrical



220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: stainless steel 316/glass



220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: stainless steel 316/glass



Up 2000lm | 3000K
2100lm | 4000K



Up 2500lm | 3000K
2600lm | 4000K

Options	Prod. no.
● stainless steel 2000lm 3000K	1002893
● stainless steel 2100lm 4000K	1002895

Options	Prod. no.
● stainless steel 2500lm 3000K	1002897
● stainless steel 2600lm 4000K	1002898



Product DASAR® 270 | Honeycomb cover
● black **Prod. no.** **1002899**



229320 843






DASAR® 115
RL, square, QPAR51




DASAR® 115
RL, round, QPAR51




DASAR® 115
RL, square, QPAR51



220-240V ~50/60Hz
Material: stainless steel 316/glass



220-240V ~50/60Hz
Material: stainless steel 316/glass



220-240V ~50/60Hz
Material: stainless steel 316/glass



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm

Options	Prod. no.
● Stainless steel	229324

Options	Prod. no.
● Stainless steel	229320

Options	Prod. no.
● Stainless steel	229374



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075








228430 845



DASAR® EXACT 116
EL, square, QPAR51



DASAR® EXACT 116
EL, round, QPAR51



220-240V ~50/60Hz
Material: stainless steel 316/glass

220-240V ~50/60Hz
Material: stainless steel 316/glass



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm



Base: 1xGU10 Max. diameter: 5.1 cm L: 6 cm

Options	Prod. no.
● Stainless steel	228434

Options	Prod. no.
● Stainless steel	228430



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h



Prod. no.: **1005077**



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: **1005077**

DASAR® 215
RL, round, QPAR111

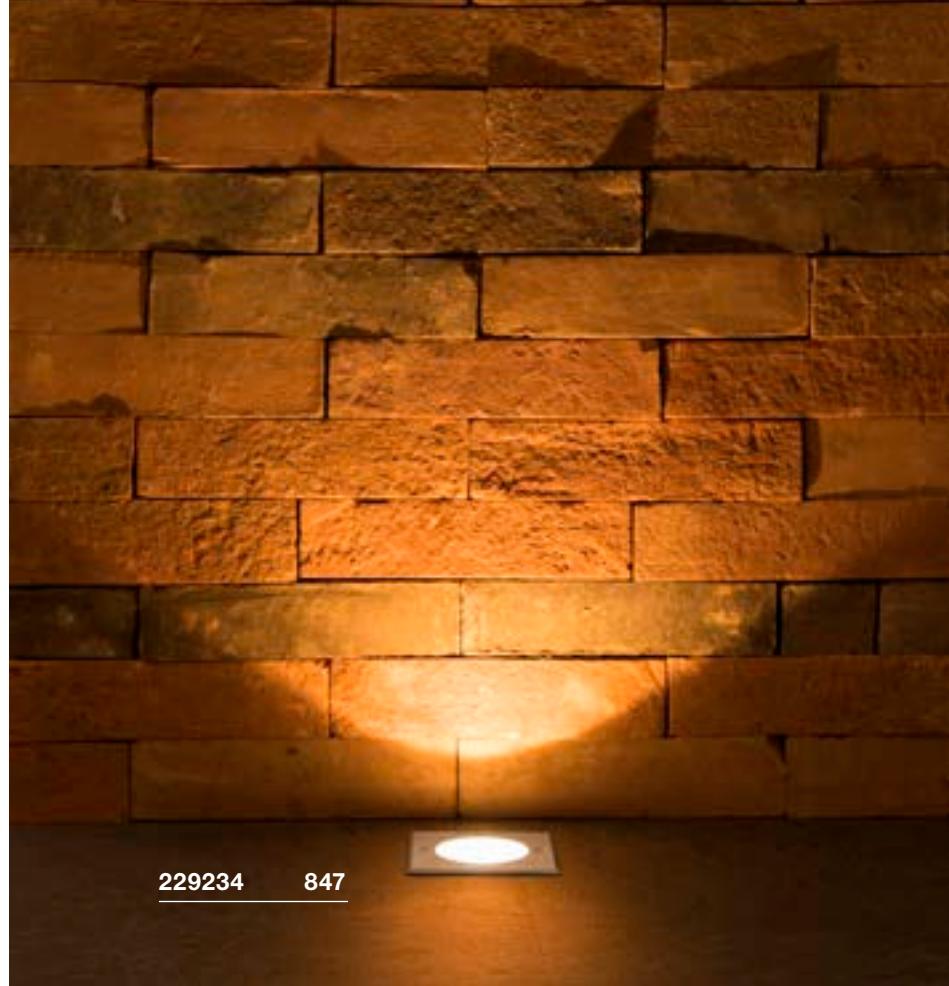

220-240V ~50/60Hz
Material: stainless steel 316/glass

SOCKET
INSIDE <75 W

Base: 1xGU10

Options	Prod. no.
● Stainless steel	229230

 QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278









DASAR® 215
RL, square, QPAR111



DASAR® 215
RL, round, E27




DASAR® 370
EL, round



220-240V ~50/60Hz
Material: stainless steel 316/glass



220-240V ~50/60Hz
Material: stainless steel 316/glass



12-24V
Power consumption: 2W
Material: stainless steel 316/glass

- This light is suitable for installation in wood
- Open cable end



Base: 1xGU10



Base: 1xE27 Max. diameter: 4.5 cm L: 13.4 cm



Up 120lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	229234

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	229200

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	233540



QPAR111 | 12.5W | 10°
3000K | 950lm | EEK=F
13kWh/1000h

Prod. no.: 1005278




LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no.: 1005289





Product	Prod. no.
LED power supply 15W 12V <input type="radio"/> white	1005444
LED power supply 15 W 24V <input type="radio"/> white	1005445

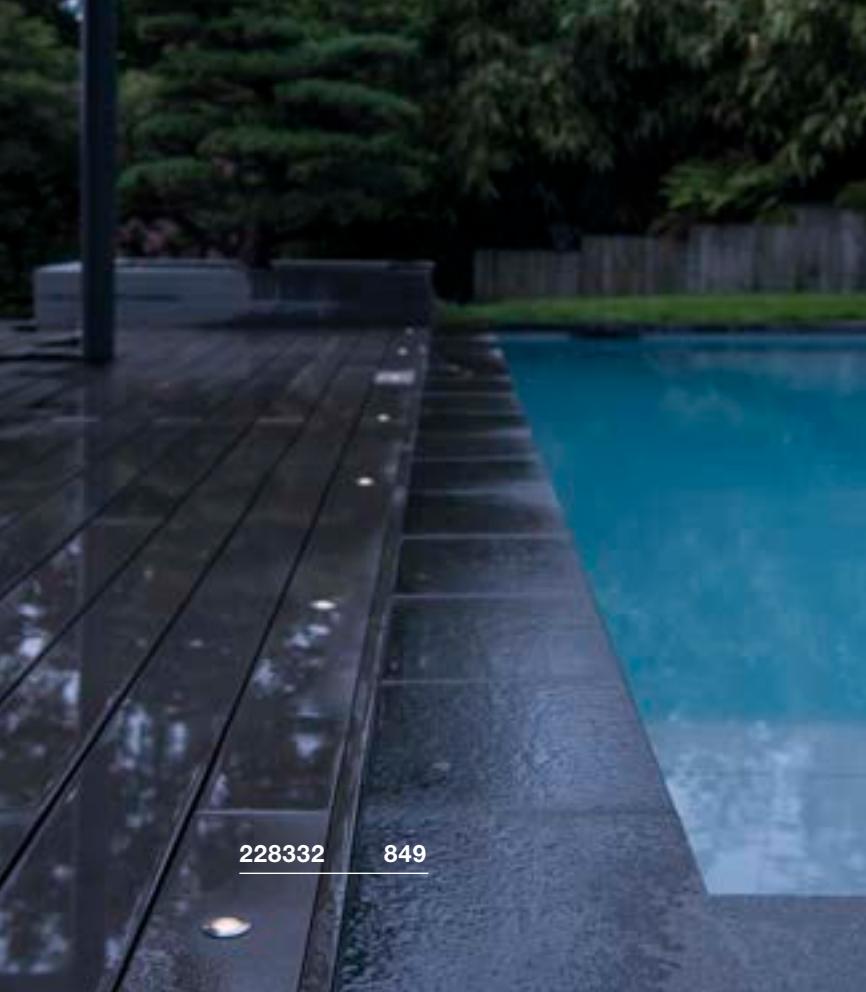


TRAIL-LITE® 60
EL



228332 **849**



7 cm



12V ~50/60Hz
Power consumption: 0.3W
Material: stainless steel 316/glass

- Only operate with conventional transformer.
- Recessed fixing kit included
- This light is suitable for installation in wood



1000384 **849**



Up 10lm | 3000K

Options	Prod. no.
● Stainless steel	227462









POWER TRAIL-LITE®
EL, square



POWER TRAIL-LITE®
EL, round



GIMBLE OUT
EL



350mA

Total wattage: 1W

Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series!
- Installation sleeve included. The light is suitable for installation in wood
- Open cable end

350mA

Total wattage: 1W

Material: stainless steel 316/glass

- Operate only with 350mA driver. Only wire together multiple power LEDs in series!
- This light is suitable for installation in wood
- Open cable end

220-240V ~50/60Hz | 600mA

Total wattage: 13W

Material: stainless steel 316

- Open cable end



Up

45lm | 3000K



Up

45lm | 3000K



Up

1100lm | 3000K

Options

Prod. no.

- Stainless steel 228342

Options

Prod. no.

- Stainless steel 228332

Options

Prod. no.

- Stainless steel 1000384



Product

Prod. no.

LED driver 3W | 350W

○ white

1005248



Product

Prod. no.

Floor-recessed fixing kit

- black 1000655

Installation pipe DN160

- grey 233792

Connection box IP68, 3-pole

- black 228730



1006171 + 1006173 851



SMALL PLOT Modules



SMALL PLOT Modules





SMALL PLOT Cover, 2-pack




H: 1.7 cm
 Diameter: 10.3 cm
 Material 1006173: Stainless steel
 Material 1006174: Aluminium

- 500 kg load for 1006174
- 800 kg load for 1006173



Options	Prod. no.
<input checked="" type="radio"/> anthracite	1006174
<input type="radio"/> Stainless steel	1006173




24V DC
 Power consumption: 2.6W
 Material: aluminium/polymethylacrylate (PMMA)

- This product is delivered without a cover.
- Open cable end

LED INSIDE	CRI 80
Up	240lm 3000K

Options	Prod. no.
<input checked="" type="radio"/> aluminium	1006172



24V DC
 Power consumption: 2.6W
 Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover.
- Open cable end

LED INSIDE	CRI 80
Up	240lm 3000K

Options	Prod. no.
<input checked="" type="radio"/> Stainless steel	1006171

SMALL PLOT Cover, 4-pack



H: 1.7 cm
 Diameter: 10.3 cm
 Material 1006175: Stainless steel
 Material 1006176: Aluminium

Product	Prod. no.
LED power supply, 12/20W 24V inc. strain relief	
<input type="radio"/> white	1005381

Product	Prod. no.
LED power supply, 12/20W 24V inc. strain relief	
<input type="radio"/> white	1005381

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1006176
<input type="radio"/> Stainless steel	1006175



1001359 + 1001255 853



BIG PLOT Modules



BIG PLOT Modules





BIG PLOT Cover, 2-pack




H: 2 cm
Diameter: 17 cm
Material: aluminium

- 500 kg load for 1001262
- 800 kg load for 1001254



Options	Prod. no.
<input checked="" type="radio"/> anthracite	1001262
<input type="radio"/> Stainless steel	1001254



220-240V ~50/60Hz
Total wattage: 5.5W
Material: aluminium/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end

220-240V ~50/60Hz
Total wattage: 5.5W
Material: stainless steel/polymethylacrylate (PMMA)

- This product is delivered without a cover
- Open cable end



Up 500lm | 3000K



Up 500lm | 3000K

Options	Prod. no.
<input checked="" type="radio"/> aluminium	1001256

Options	Prod. no.
<input type="radio"/> Stainless steel	1001359

BIG PLOT Cover, 4-pack



H: 2 cm
Diameter: 17 cm
Material: stainless steel 316




Product	Prod. no.
T-connector box	
<input checked="" type="radio"/> black	228726



Product	Prod. no.
T-connector box	
<input checked="" type="radio"/> black	228726

Options	Prod. no.
<input checked="" type="radio"/> anthracite	1001263
<input type="radio"/> Stainless steel	1001255

ROCCI
EL, square



100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: stainless steel 316/glass





Up

580lm | 3000K

Options	Prod. no.
● Stainless steel	227604

ROCCI
EL, round




100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: stainless steel 316/glass



Up






580lm | 3000K

Options	Prod. no.
● Stainless steel	227600

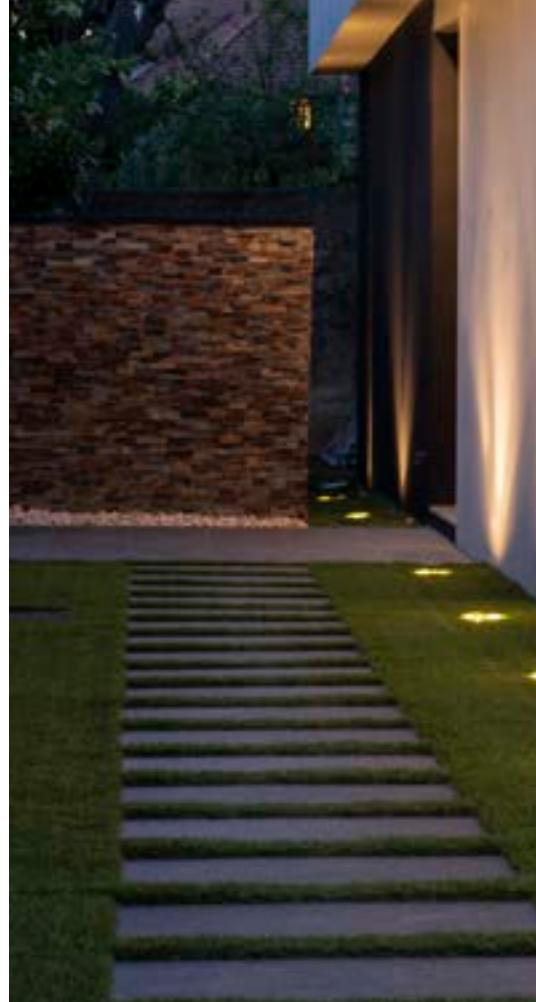




227604 854

ROCCI 200
EL, squareROCCI 200
EL, round

100-277V ~50/60Hz | 350mA
 Total wattage: 16W
 Material: stainless steel 316/glass



100-277V ~50/60Hz | 350mA
 Total wattage: 16W
 Material: stainless steel 316/glass



Up 1530lm | 3000K



Up 1530lm | 3000K

Options	Prod. no.
● Stainless steel	1006105

Options	Prod. no.
● Stainless steel	1006104







1006105 855




227680 857


**SOLASTO
EL, square**

**SOLASTO
EL, round**


220-240V ~50/60Hz
Material: stainless steel 304/glass



220-240V ~50/60Hz
Material: stainless steel 304/glass



Base: 1xGU10



Base: 1xGU10

Options	Prod. no.
● Stainless steel	227684

Options	Prod. no.
● Stainless steel	227680



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=F
6kWh/1000h

Prod. no.: 1005075



1006400 281





LED QT | 860



LED C35 | 860



LED TCR-TSE | 860



LED QR51 | 861



LED QPAR51 | 861



LED | 862

LED QPAR111 |
862, 863, 864

QPAR111 | 862, 863



LED A60 | 864, 865



LED T32 | 861



LED T38 | 865



LED T45 | 865



LED ST64 | 865




LED ST58 | 865



LED G125 | 865


LED QT14 G9



220-240V ~50/60Hz
Wattage: 3.6W
Material: ceramic
Diameter: 1.8 cm L: 5.4 cm

Luminous flux	400lm
Lamp current	0.03A
Colour rendering index	93
Output	3,6W
Energy consumption/1000h	4kWh


LED QT-DE12 R7S, 78 mm



220-240V ~50/60Hz
Wattage: 9W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 2.9 cm

Luminous flux	1050lm
Lamp current	0.043A
Colour rendering index	95
Output	9W
Energy consumption/1000h	9kWh

LED QT-DE12 R7S, 118 mm



220-240V ~50/60Hz
Wattage: 15W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 2.9 cm


Luminous flux	2000lm
Lamp current	0.068A
Colour rendering index	92
Output	15W
Energy consumption/1000h	15kWh

Options	Prod. no.
<input type="radio"/> white 3000K	1005286

Options	Prod. no.
<input checked="" type="radio"/> grey 3000K	1005287

Options	Prod. no.
<input checked="" type="radio"/> grey 3000K	1005288


LED C35 E14



220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Diameter: 3.5 cm L: 9.8 cm

Luminous flux	380lm
Lamp current	0.025A
Colour rendering index	90
Output	4,2W
Energy consumption/1000h	5kWh


LED C35 E14



220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Diameter: 3.5 cm L: 9.8 cm

Luminous flux	350lm
Lamp current	0.025A
Colour rendering index	90
Output	4,2W
Energy consumption/1000h	5kWh

LED TCR-TSE GX53



220-240V ~50/60Hz
Wattage: 6.1W
Material: polycarbonate (PC) /
polycarbonate (PC)
Diameter: 7.5 cm L: 2.4 cm

Luminous flux	490lm
Lamp current	0.034A
Colour rendering index	93
Output	6,1W
Energy consumption/1000h	6kWh


Options	Prod. no.
<input type="radio"/> transparent 2700K	1005284

Options	Prod. no.
<input type="radio"/> white 2700K	1005285

Options	Prod. no.
<input type="radio"/> white 2700K	1005272
<input type="radio"/> white 3000K	1005271
<input type="radio"/> white 4000K	1005269



LED QR51 GU5.3




12V AC
Wattage: 5.8W
Material: glass
Diameter: 5 cm L: 4.5 cm

Luminous flux	450lm
Lamp current	0.63A
Max. luminosity	1300cd
Colour rendering index	90
Output	5.8W
Energy consumption/1000h	6kWh

Options	Prod. no.
<input type="radio"/> transparent 2700K	1001574
<input checked="" type="radio"/> transparent 3000K	1001575

LED QPAR51 GU10, tunable 2700-6500K, smart




220-240V ~50/60Hz
Wattage: 5W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diametr: 5 cm L: 5.4 cm

Luminous flux	350lm
Lamp current	0.04A
Max. luminosity	530cd
Colour rendering index	92
Output	5W
Energy consumption/1000h	5kWh

Options	Prod. no.
<input type="radio"/> white 2700-6500K	1005311

LED QPAR51 GU10, RGBW, smart




220-240V ~50/60Hz
Wattage: 5.2W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diameter: 5 cm L: 6.1 cm

Luminous flux	350lm
Lamp current	0.042A
Max. luminosity	680cd
Colour rendering index	92
Output	5.2W
Energy consumption/1000h	5kWh

Options	Prod. no.
<input type="radio"/> white	1005312


LED QPAR51 GU10



220-240V ~50/60Hz
Wattage: 2.4W
Material: glass
Diametr: 5 cm L: 5.4 cm

Luminous flux	230lm
Lamp current	0.025A
Max. luminosity	450cd
Colour rendering index	80
Output	2.4W
Energy consumption/1000h	3kWh


LED T32 GU10



220-240V ~50/60Hz
Wattage: 3.2W
Material: glass
Diameter: 3.2 cm L: 10 cm

Luminous flux	270lm
Lamp current	0.0175A
Colour rendering index	90
Output	3.2W

LED QPAR51 GU10



220-240V ~50/60Hz
Wattage: 6W
Material: glass
Diameter: 5 cm L: 5 cm


Luminous flux	360lm
Lamp current	0.033A
Max. luminosity	680cd
Colour rendering index	93
Output	6W
Energy consumption/1000h	6kWh

Options	Prod. no.
<input type="radio"/> transparent 2700K	1007230
<input checked="" type="radio"/> transparent 3000K	1007231

Options	Prod. no.
<input type="radio"/> transparent 2700K	1006321

Options	Prod. no.
<input type="radio"/> silver 2200-2700K	1005273

LED QPAR51 GU10




220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Options	Prod. no.
<input checked="" type="radio"/> black 2700K	1005077
<input checked="" type="radio"/> black 3000K	1005080
<input checked="" type="radio"/> black 4000K	1005083

LED QPAR111 GU10




220-240V ~50/60Hz
Wattage: 12W
Material: aluminium
Diameter: 11 cm L: 7 cm

Luminous flux	680lm
Lamp current	0.05A
Max. luminosity	930cd
Colour rendering index	90
Output	12W
Energy consumption/1000h	12kWh

Options	Prod. no.
<input checked="" type="radio"/> aluminium 2700K	1005297
<input checked="" type="radio"/> aluminium 3000K	1005298
<input checked="" type="radio"/> aluminium 4000K	1005299

LED QPAR51 GU10




220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Options	Prod. no.
<input type="radio"/> white 2700K	1005076
<input type="radio"/> white 3000K	1005079
<input type="radio"/> white 4000K	1005082

QPAR111 GU10, RGBW, smart




220-240V ~50/60Hz
Wattage: 10W
Material: aluminium
Diameter: 11.1 cm L: 7 cm

Luminous flux	750lm
Lamp current	0.059A
Max. luminosity	3500cd
Colour rendering index	94
Output	10W
Energy consumption/1000h	10kWh

Options	Prod. no.
<input type="radio"/> white	1005315

LED QPAR51 GU10




220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5.4 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Colour rendering index	92
Output	6W
Energy consumption/1000h	6kWh

Options	Prod. no.
---------	-----------

QPAR111 GU10, RGBW, smart




220-240V ~50/60Hz
Wattage: 10W
Material: aluminium/polycarbonate (PC)
Diameter: 11.1 cm L: 7 cm

Luminous flux	780lm
Lamp current	0.059A
Max. luminosity	2000cd
Colour rendering index	94
Output	10W
Energy consumption/1000h	10kWh

Options	Prod. no.
---------	-----------




QPAR111 GU10, tunable 2700-6500K, smart



220-240V ~50/60Hz
Wattage: 10W
Material: aluminium/polycarbonate (PC)
Diameter: 11.1 cm L: 7 cm

Luminous flux	760lm
Lamp current	0.053A
Max. luminosity	4000cd
Colour rendering index	93
Output	10W
Energy consumption/1000h	10kWh


LED QPAR111 GU10



220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm L: 7 cm

Luminous flux	900lm
Lamp current	0.058A
Max. luminosity	11000cd
Colour rendering index	90
Output	12.5W
Energy consumption/1000h	13kWh

LED QPAR111 GU10



220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm L: 7 cm


Luminous flux	950lm
Lamp current	0.058A
Max. luminosity	3000cd
Colour rendering index	93
Output	12.5W
Energy consumption/1000h	13kWh

Options	Prod. no.
<input type="radio"/> white 2700-6500K 25°	1005313
<input type="radio"/> white 2700-6500K 40°	1005314

Options	Prod. no.
<input type="radio"/> silver 2700K	1005275
<input type="radio"/> silver 3000K	1005278
<input type="radio"/> silver 4000K	1005281

Options	Prod. no.
<input type="radio"/> silver 2700K	1005276
<input type="radio"/> silver 3000K	1005279
<input type="radio"/> silver 4000K	1005282


LED QPAR111 GU10



220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm L: 7 cm

Luminous flux	1000lm
Lamp current	0.058A
Max. luminosity	1000cd
Colour rendering index	93
Output	12.5W
Energy consumption/1000h	13kWh


LED QPAR111 GU10



220-240V ~50/60Hz
Wattage: 8W
Material: glass
Diameter: 11.1 cm L: 6.1 cm

Luminous flux	680lm
Lamp current	0.046A
Max. luminosity	1300cd
Colour rendering index	93
Output	8W
Energy consumption/1000h	8kWh

LED QPAR111 GU10



220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Diameter: 11.1 cm L: 7.1 cm


Luminous flux	530lm
Lamp current	0.051A
Max. luminosity	1400cd
Colour rendering index	93
Output	7.3W
Energy consumption/1000h	8kWh

Options	Prod. no.
<input type="radio"/> silver 2700K	1005277
<input type="radio"/> silver 3000K	1005280
<input type="radio"/> silver 4000K	1005283

Options	Prod. no.
<input type="radio"/> transparent 2700K	1005274

Options	Prod. no.
<input type="radio"/> silver 2700K	1005291
<input type="radio"/> silver 3000K	1005292

LED QPAR111 GU10




220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Diameter: 11.1 cm L: 7.1 cm

Luminous flux	500lm
Lamp current	0.051A
Max. luminosity	1000cd
Colour rendering index	93
Output	7.3W
Energy consumption/1000h	8kWh

Options	Prod. no.
<input checked="" type="radio"/> silver	
2700K	1005294
<input checked="" type="radio"/> silver	
3000K	1005295
<input checked="" type="radio"/> silver	
4000K	1005296

LED A60 E27



220-240V ~50/60Hz
Wattage: 9W
Material: plastic
Diameter: 6 cm L: 11 cm

Luminous flux	800lm
Lamp current	0.048A
Colour rendering index	90
Output	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
<input checked="" type="radio"/> white	
2700K	1005301

LED A60 E27, tunable 2700-6500K, smart



220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66)
Diameter: 6 cm L: 11 cm

Luminous flux	800lm
Lamp current	0.067A
Colour rendering index	92
Output	9W
Energy consumption/1000h	9kWh

LED A60 E27, RGBW, smart




220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diameter: 6 cm L: 11 cm

Luminous flux	800lm
Lamp current	0.073A
Colour rendering index	92
Output	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
<input checked="" type="radio"/> white	1005318


LED A60 E27



220-240V ~50/60Hz
Wattage: 13.2W
Material: plastic
Diameter: 6 cm L: 12 cm

Luminous flux	1300lm
Lamp current	0.062A
Colour rendering index	93
Output	13.2W
Energy consumption/1000h	13kWh

LED A60 E27




220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6 cm L: 10.5 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7.5W
Energy consumption/1000h	8kWh

Options	Prod. no.
<input checked="" type="radio"/> transparent	
2700K	1005303




LED T38 E27



220-240V ~50/60Hz
Wattage: 8W
Material: plastic
Diameter: 3.8 cm L: 11.6 cm

Luminous flux	880lm
Lamp current	0.035A
Colour rendering index	94
Output	8W
Energy consumption/1000h	8kWh


LED T45 E27



220-240V ~50/60Hz
Wattage: 13.5W
Material: plastic
Diameter: 4.5 cm L: 14 cm

Luminous flux	1520lm
Lamp current	0.06A
Colour rendering index	94
Output	13,5W
Energy consumption/1000h	14kWh

LED ST64 E27



220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6.4 cm L: 14.5 cm

Luminous flux	700lm
Lamp current	0.038A
Colour rendering index	90
Output	7,5W
Energy consumption/1000h	8kWh

LED A60 E27, Mirrorhead, Chrom



220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6 cm L: 10.5 cm

Luminous flux	720lm
Lamp current	0.038A
Colour rendering index	92
Output	7,5W
Energy consumption/1000h	8kWh

LED ST58 E27



220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 5.8 cm L: 14.2 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7,5W
Energy consumption/1000h	8kWh

LED G125 E27



220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 12.5 cm L: 17.8 cm

Luminous flux	800lm
Lamp current	0.038A
Colour rendering index	93
Output	7,5W
Energy consumption/1000h	8kWh

Options Prod. no.

Options	Prod. no.	
<input checked="" type="radio"/> chrome	2700K	1005305

Options Prod. no.

Options	Prod. no.	
<input type="radio"/> transparent	2700K	1005268

Options Prod. no.

Options	Prod. no.	
<input type="radio"/> transparent	2700K	1005310

1007300 151

1007308 151

1002913 189





TENSEO TRANSFORMER 12V AC | 50VA conventional




220-240V ~50/60Hz
H: 11 cm
Diameter: 11.1 cm
Material: steel/brass

Output voltage	12V AC
Wattage up to	60W
Thermal protection	130°C
Number of secondary outputs	1

Options	Prod. no.
<input checked="" type="radio"/> black	1002691
<input type="radio"/> white	1002692
<input checked="" type="radio"/> chrome	1002693

TENSEO TRANSFORMER 12V AC | 105VA conventional




220-240V ~50/60Hz
H: 11 cm
Diameter: 11.1 cm
Material: brass/glass

Output voltage	12V AC
Wattage up to	105W
Thermal protection	130°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	138981
<input checked="" type="radio"/> chrome	138982

TENSEO TRANSFORMER 12V AC | 210VA conventional



220-240V ~50/60Hz
H: 11 cm
Diameter: 13.5 cm
Material: steel/brass

Output voltage	12V AC
Wattage up to	210W
Thermal protection	130°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	138991
<input checked="" type="radio"/> chrome	138992

TRANSFORMER 60VA | 12V AC




230V ~50Hz
L: 10.5 cm W: 3.3 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	12V AC
Wattage of	10W
Wattage up to	60W
Control gear power factor	0.98
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	461060

DALI INTERFACE 1-10V + on/off



250V AC
L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10V control input
- Galvanic isolation of DALI input and 1-10V output

Output voltage	250V AC
Wattage up to	1000W

Options	Prod. no.
<input checked="" type="radio"/> grey	1002218

CONVERTER Phase dim -> DALI



100-240V ~50/60Hz
L: 4.6 cm W: 4.5 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	100-240V AC
Wattage of	0W
Wattage up to	200W

Options	Prod. no.
<input type="radio"/> white	1006452



DALI UNIVERSAL DIMMER 10-300W




230V AC
L: 12.02 cm W: 3.02 cm H: 2.16 cm
Material: plastic

- Suitable for R, L, and C thanks to automatic load detection.
- DALI power consumption: 6mA

Output voltage	230V AC
Wattage of	10W
Wattage up to	300W

Options	Prod. no.
<input checked="" type="radio"/> grey	1002221


DALI CONTROLLER 24V DC



10V-24V DC
L: 11.6 cm W: 4.2 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	10-24V DC
Number of secondary outputs	1

CONTROLLER LED Strip CCT / RGBW




12V/24V DC
L: 14.5 cm W: 4.65 cm H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	12-24V DC
Wattage of	48W
Wattage up to	96W
Thermal protection	100°C

NEW

LED POWER SUPPLY 15W | 12V




200-240V ~50/60Hz
H: 2.5 cm
Diameter: 5.5 cm
Material: polycarbonate (PC)

Output voltage	12V DC
Wattage of	0W
Wattage up to	15W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1005444

LED POWER SUPPLY 15W | 24V



200-240V ~50/60Hz
H: 2.2 cm
Diameter: 5.5 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	15W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1005445

LED POWER SUPPLY 20W | 12/24V



220-240V ~50/60Hz
L: 11.5 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	12/24V DC
Wattage of	0W
Wattage up to	18W/20W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1005381

LED DRIVER

30W | 24V DC incl. strain relief



NEW



220-240V ~50/60Hz
L: 30 cm W: 3 cm H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	30W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007250

LED DRIVER

100W | 24V DC incl. strain relief



NEW



220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007251

LED DRIVER

150W | 24V DC incl. strain relief



NEW



220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	150W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007252

LED DRIVER

250W | 24V DC incl. strain relief



NEW

220-240V ~50/60Hz
L: 40 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	250W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007253

LED POWER SUPPLY

25W | 24V



NEW


220-240V ~50/60Hz
L: 12.8 cm W: 5.2 cm H: 3 cm
Material: polycarbonate (PC) /
polycarbonate (PC)

Output voltage	24V DC
Wattage of	9.6W
Wattage up to	25W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input checked="" type="radio"/> white/grey	1006336

LED POWER SUPPLY

50W | 24V




220-240V ~50/60Hz
L: 18.4 cm W: 6.1 cm H: 3.2 cm
Material: polycarbonate (PC) /
polycarbonate (PC)

Output voltage	24V DC
Wattage of	12W
Wattage up to	50W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input checked="" type="radio"/> white/blue	1003104

LED POWER SUPPLY

100W | 24V DC




220-240V ~50/60Hz
L: 21 cm W: 6.7 cm H: 3.4 cm
Material: polycarbonate (PC) / polycarbonate (PC)

Output voltage	24V DC
Wattage of	33W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

white/blue Prod. no. 1003105

LED DRIVER

30W | 24V DC DALI dimmable incl. strain relief




220-240V ~50/60Hz
L: 30 cm W: 3 cm H: 1.6 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	12W
Wattage up to	30W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

white Prod. no. 1007254

LED DRIVER

100W | 24V DC DALI dimmable incl. strain relief




220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	30W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

white Prod. no. 1007255

LED DRIVER

150W | 24V DC DALI dimmable incl. strain relief




220-240V ~50/60Hz
L: 35 cm W: 3 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	45W
Wattage up to	150W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

white Prod. no. 1007256

LED DRIVER

250W | 24V DC DALI dimmable incl. strain relief




220-240V ~50/60Hz
L: 40 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	75W
Wattage up to	250W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

white Prod. no. 1007257

LED POWER SUPPLY

60W | DALI, 24V, 2 channel DALI dimmable




220-240V ~50/60Hz
L: 20.2 cm W: 5.8 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	60W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	2

white Prod. no. 1006133


LED POWER SUPPLY
100W | 24V | 2 channel DALI
dimmable



220-240V ~50/60Hz
L: 34.7 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Wattage of	5W
Wattage up to	100W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	2

LED DRIVER
10W | 200mA | dimmable including strain relief



220-240V ~50/60Hz
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

NEW

LED DRIVER
6W | 350mA | Dimmable



220-240V ~50/60Hz
L: 6.3 cm W: 4 cm H: 2.3 cm
Material: polycarbonate (PC)

Options	Prod. no.
<input type="radio"/> white	1006134

Options	Prod. no.
<input type="radio"/> white	1007215

Options	Prod. no.
<input type="radio"/> white	1002791

LED DRIVER
20W | 350mA | Dimmable



NEW




220-240V 0~/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

LED DRIVER
20W | 350mA/500mA | PHASE



NEW




220-240V 0~/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

LED DRIVER
700mA | PHASE



NEW



220-240V ~50/60Hz
L: 8.5 cm W: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	28-50V DC
Wattage of	9.8W
Wattage up to	17.5W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	10-30V DC
Wattage of	3.5W
Wattage up to	15W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	8.6-12.9V DC
Wattage of	6W
Wattage up to	9W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007228


Options	Prod. no.
<input type="radio"/> white	1007227

Options	Prod. no.
<input type="radio"/> white	1007213



LED DRIVER


20W | 700mA | Dimmable



200-240V ~50/60Hz
L: 11.5 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

LED DRIVER


40W | 700mA | Dimmable



200-240V ~50/60Hz
L: 14.5 cm W: 4 cm H: 3 cm
Material: polycarbonate (PC)

LED DRIVER

40W | 1050mA | Dimmable



220-240V ~50/60Hz
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	18-26V DC
Wattage of	12.6W
Wattage up to	18.2W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	32-54V DC
Wattage of	22.4W
Wattage up to	37.8W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	22-43V DC
Wattage of	23W
Wattage up to	45W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1


Options	Prod. no.
<input type="radio"/> white	1006202

Options	Prod. no.
<input type="radio"/> white	1005446

Options	Prod. no.
<input type="radio"/> white	464804

LED DRIVER


40W | 1000mA | Dimmable



220-240V ~50/60Hz
L: 14.5 cm W: 4 cm H: 3 cm
Material: polycarbonate (PC)

LED DRIVER


25W | 150-700mA | DALI dimmable



220-240V 0~/~50/60Hz
L: 11.9 cm W: 5.2 cm H: 2.25 cm
Material: polycarbonate (PC)

LED DRIVER

25W | 150-300mA | DALI dimmable



220-240V ~50/60Hz
L: 14.18 cm W: 4.38 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	25-40V DC
Wattage of	26.3W
Wattage up to	42W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	2-50V DC
Wattage of	0.3W
Wattage up to	25W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Output voltage	10-40V DC
Wattage of	1.5W
Wattage up to	12W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1005387

Options	Prod. no.
<input type="radio"/> white	1007229

Options	Prod. no.
<input type="radio"/> white	1006456

RF MODULE for DALI driver



NEW



L: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

- Zigbee 3.0 Single Colour

RF MODULE for DALI driver



NEW


L: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

- Casambi

LED DRIVER 12W | 250mA DALI dimmable with RF interface



NEW



220-240V ~50/60Hz
L: 14.18 cm W: 4.38 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	1.5W
Wattage up to	12W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options Prod. no.

white 1006199

Options Prod. no.

white 1006454

Options Prod. no.

white 1006194

LED DRIVER 40W | 500mA DALI dimmable with RF interface



NEW




220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-42V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 40W | 700mA DALI dimmable with RF interface



NEW



220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-42V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 40W | 1050mA DALI dimmable with RF interface



NEW



220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options Prod. no.


white 1006195

Options Prod. no.


white 1006196

Options Prod. no.


white 1006197

LED DRIVER20W | 250-700mA 1-10V/DALI
dimmable220-240V ~50/60Hz
L: 15 cm W: 5.2 cm H: 2.8 cm
Material: polycarbonate (PC)

Output voltage	6-60V DC
Wattage of	1.5W
Wattage up to	20W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER40W | 500-1050mA 1-10V/DALI
dimmable220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	9-58V DC
Wattage of	4.5W
Wattage up to	40W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER50W | 700-1500mA 1-10V/DALI
dimmable220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	6-58V DC
Wattage of	4.2W
Wattage up to	50W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER

40W | 1050mA DALI CCT tunable

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	10-40V DC
Wattage of	5W
Wattage up to	42W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	7

RF MODULE
for DALI driverL: 4.3 cm W: 3.1 cm H: 1.2 cm
Material: polycarbonate (PC)

• Zigbee 3.0 Dual Colour

LED DRIVER
10W | 250mA220-240V ~50/60Hz
L: 6.5 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	26-40V DC
Wattage of	6.5W
Wattage up to	10W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1002423

Options	Prod. no.
<input type="radio"/> white	1002424

Options	Prod. no.
<input type="radio"/> white	1002425

LED DRIVER 3W | 350mA



NEW



100-240V ~50/60Hz
L: 6.5 cm W: 2.9 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	2,7-10V DC
Wattage of	1W
Wattage up to	3,5W
Control gear power factor	0.4
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 3W | 350mA AMP socket included



NEW




100-240V ~50/60Hz
L: 6.5 cm W: 2.9 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	2,7-10V DC
Wattage of	1W
Wattage up to	3,5W
Control gear power factor	0.4
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 20W | 350mA



NEW



220-240V 0~/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2-54V DC
Wattage of	0.7W
Wattage up to	19W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1005248 ●

Options	Prod. no.
<input type="radio"/> white	1007270 ●

Options	Prod. no.
<input type="radio"/> white	1007225 ●

LED DRIVER 21W | 500mA including strain relief



NEW

220-240V 0~/~50/60Hz
L: 11.6 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	2-42V DC
Wattage of	1W
Wattage up to	21W
Control gear power factor	0.95
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 3W | 700mA including strain relief



NEW

100-240V ~50/60Hz
L: 6.5 cm W: 2.9 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	2,7-4V DC
Wattage of	1.9W
Wattage up to	2.8W
Control gear power factor	0.4
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER 30W | 700mA



220-240V ~50/60Hz
L: 14.7 cm W: 4.3 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	30-42V DC
Wattage of	21W
Wattage up to	29,5W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
<input type="radio"/> white	1007226 ●

Options	Prod. no.
<input type="radio"/> white	1007216 ●

Options	Prod. no.
<input type="radio"/> white	1004781

LED DRIVER

40W | 1050mA



220-240V ~50/60Hz
L: 14.7 cm W: 4.3 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	30-42V DC
Wattage of	31.5W
Wattage up to	44W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	1

LED DRIVER

40W | 700/900/1000mA




120-277V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	28-52V DC
Wattage of	19.6W
Wattage up to	40W
Control gear power factor	0.9
Thermal protection	110°C
Number of secondary outputs	3

Options	Prod. no.
<input type="radio"/> white	1004782

Options	Prod. no.
<input type="radio"/> white	1006120

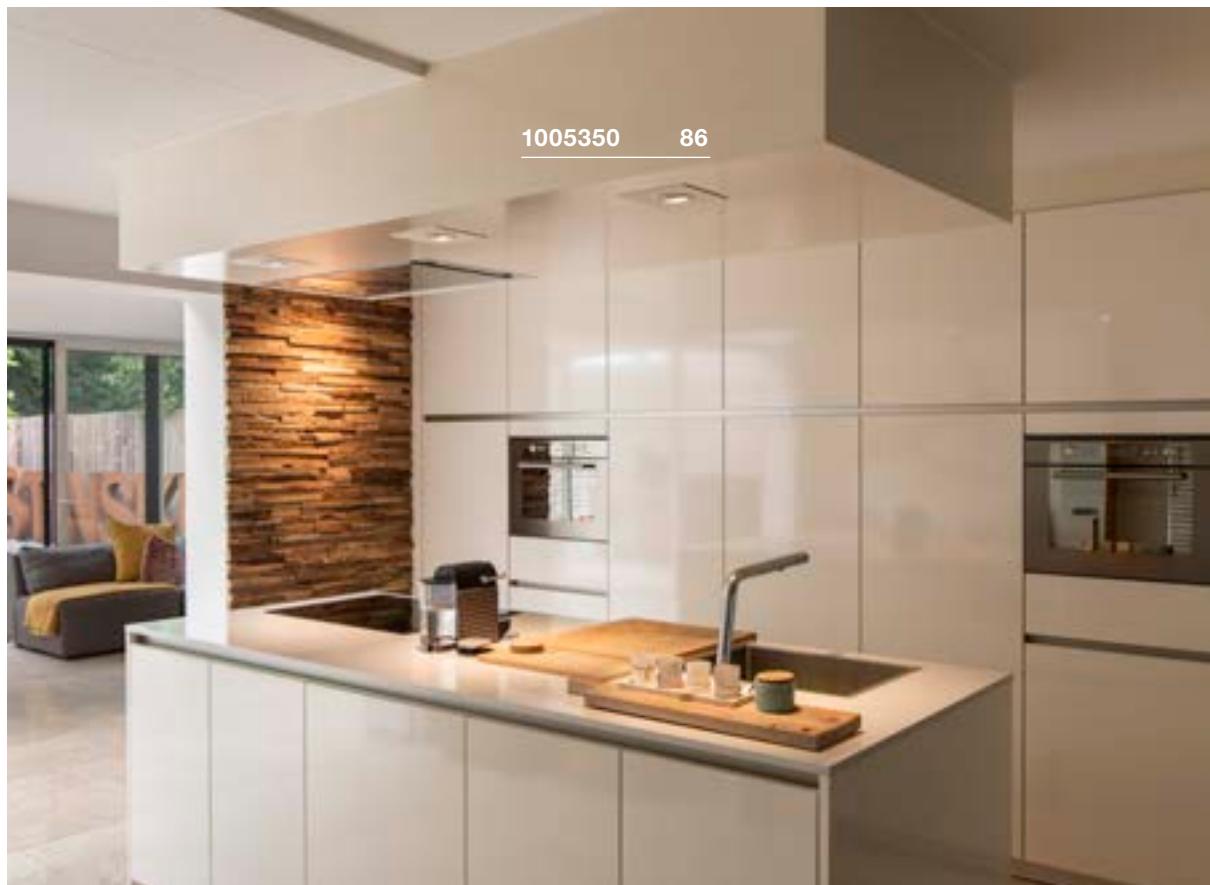

CEILING HOOK



L: 4.6 cm
Diameter: 1.8 cm
Material: aluminium

CABLE CLAMP



L: 3.1 cm
Diameter: 1.4 cm
Material: aluminium

GLENOS® Ceiling rosette



220-240V ~50/60Hz
L: 8.5 cm W: 8.5 cm H: 2.7 cm
Material: aluminium

Nominal voltage
Max. current load

220-240V
~50/60Hz
8.5A

Options	Prod. no.
<input checked="" type="radio"/> black	132670
<input type="radio"/> white	132671

Options	Prod. no.
<input checked="" type="radio"/> black	132680
<input type="radio"/> white	132681

Options	Prod. no.
<input checked="" type="radio"/> black	210060
<input type="radio"/> white	210061
<input type="radio"/> grey	210064

TEXTILE CABLE 3-pin, 10 m



L: 1000 cm
Diameter: 0.6 cm
Material: polyvinyl chloride (PVC)/textile

CABLE 3-pin, 3 x 0,75 mm², 10 m



L: 1000 cm

WIRE ROPE SUSPENSION



L: 500cm
Diameter: 0.15 cm
Material: steel/plastic

Max. voltage

300V ACV

Max. voltage

300V ACV


Options	Prod. no.
<input checked="" type="radio"/> black	961270

Options	Prod. no.
<input type="radio"/> transparent	961250

Options	Prod. no.
<input type="radio"/> silver	961037

STOPPER FOR WIRE ROPE**CABLE EXTENSION**

Diameter: 0.7 cm
Material: steel



L: 100 cm
Material: plastic

- With amp plug and socket

Max. current load 0.35A

Options	Prod. no.
<input checked="" type="radio"/> grey	961034

Options	Prod. no.
<input type="radio"/> white	111861

CONNECTOR STRIP
3 outlets**DOUBLE-SIDED TAPE**

L: 5.2 cm W: 1.4 cm H: 1.3 cm
Material: plastic

L: 300 cm W: 0.9 cm

Max. current load 0.35A

Options	Prod. no.
<input checked="" type="radio"/> black	111850

Options	Prod. no.
<input type="radio"/> transparent	220000



1000735 **699**

**GU10 LED
CONNECTION BOX**
with base, max. 10W



NEW



L: 3.8 cm W: 3.1 cm H: 1.7 cm
Material: plastic

GU10 CONNECTION BOX
with base, universal



220-240V ~50/60Hz
L: 2.8 cm W: 2.8 cm H: 3.7 cm
Material: ceramic/plastic

- Cable length 15 cm

GU10 SOCKET



230V ~50Hz
H: 1.6 cm
Diameter: 2.8 cm
Material: ceramic

- Cable length 15 cm

Nominal voltage **230V ~50Hz**

Options	Prod. no.
<input checked="" type="radio"/> black	1007283

Options	Prod. no.
<input checked="" type="radio"/> white/black	1000909

Options	Prod. no.
<input type="radio"/> white	955135

CONNECTION BOX IP68, 3-pin



IP 68

230V ~50Hz
L: 11.5 cm
Diameter: 2.7 cm
Material: polyamide (PA)

T-CONNECTOR BOX IP68, 3-pin



IP 68

230V ~50Hz
L: 11 cm W: 6.4 cm H: 3 cm
Material: polyamide (PA)

Nominal voltage	230V ~50Hz
Max. voltage	450V ACV
Max. current load	17.5A

Nominal voltage	230V ~50Hz
Max. voltage	500V DCV
Max. current load	17.5A

Options	Prod. no.
● black	228730

Options	Prod. no.
● black	228726

CONNECTION BOX IP68, 5-pin



IP 68

230V ~50Hz
L: 13 cm
Diameter: 3.2 cm
Material: polyamide (PA)

CONNECTION BOX IP68, 5-pin, DALI



NEW



IP 68

450V
L: 18 cm W: 6.3 cm H: 3.3 cm
Material: polyamide 66 (PA 66)

Nominal voltage	230V ~50Hz
Max. voltage	450V ACV
Max. current load	32A

Nominal voltage	450V
Max. current load	16A

Options	Prod. no.
● black	228725

Options	Prod. no.
● black	1006453

NUMINOS®

	Recessed lights	83 – 87, 91 – 93
	Wall and ceiling lights	99 – 101
	Ceiling lights	103 – 105
	Pendant lights	106 – 109
	3-phase busbars	110 – 113, 115
	48V system	469 – 471
	Accessory parts	94 – 95

Or simply configure your system online at: numinos.slv.com

NEW TRIA®

	Recessed lights	122 – 147
--	-----------------------	-----------

MEDO®

	Wall and ceiling lights	148 – 161
	Ceiling lights	164 – 165
	Pendant lights	166 – 167
	Recessed lights	168 – 169

LALU®

	Pendant lights	176 – 183
--	----------------------	-----------

ONE®

	Pendant lights	186 – 191
	Wall and ceiling lights	192 – 193
	3-phase busbars	194 – 195
	Table and floor lamps	196 – 199

Please note: 7-digit product no. can be found from page 886

111000			
111262	238	117351	262
111292	239	132000	
111362	145	132020	409
111382	145	132021	409
111850	879	132024	409
111861	879	132600	279, 281, 283, 295, 305, 309, 318
112000		132601	279, 281, 283, 295, 305, 307, 309
112221	227	132605	279, 281, 283, 295, 305, 309
112222	227	132610	295, 305
112225	227	132611	295, 305
112242	234	132660	296
112682	227	132661	296
112692	227	132662	296
112720	238	132670	878
112721	238	132671	878
112780	238, 239, 240	132680	878
112781	238, 239, 240	132681	878
112910	220	132690	295
112911	220	132691	295
		132835	660
113000			
113140	219	133000	
113141	219	133009	309
113150	219	133019	309
113151	219	133050	309
113160	220	133060	309
113161	220	133444	307
113170	221	133481	314
113171	221	133482	314
113262	238	133489	314
113292	239	133490	314
113492	145	133840	167
113512	145	133841	167
113540	145	133850	167
113541	145	133851	167
113550	145	135000	
113830	145	135250	153, 157, 161, 165
113840	145	135251	153, 157, 161, 165
113841	145	135254	153, 157, 161, 165
113890	141	138000	
113891	141	138981	868
113930	257	138982	868
113931	257	138991	868
113940	257	138992	868
113941	257	139000	
113970	141	139004	483
113971	141	139006	484
113976	141	139024	482
114000		139026	483
114420	245	139030	482
114421	245	139031	482
114426	245	139040	483
114430	245	139041	483
114431	245	139050	483
114436	245	139051	483
114440	246	139060	484
114441	246	139061	484
114450	247	139070	486
114451	247	139071	486
114480	232	139072	486
114481	232	139080	486
115000		139081	486
115510	214	139082	486
115511	214	139090	487
115520	214	139091	487
115521	214	139092	487
115530	214	139100	489
115531	214	139101	489
115540	215	139102	489
115541	215	139120	491
115550	215	139121	491
115551	215	139122	491
117000		139130	489
117100	265	139131	489
117101	265	139132	489
117110	265	143000	
117111	265	143010	495
117311	230	143011	495
117321	262	143012	495
117331	230	143020	495
		143021	495
		143022	495
		143030	497
		143031	497
		143032	497
		143040	497
		143041	497
		143042	497
		143050	497
		143051	497
		143052	497
		143060	497
		143061	497
		143062	497
		143070	497
		143071	497
		143072	497
		143080	497
		143081	497
		143082	497
		143090	497
		143091	497
		143092	497
		143100	497
		143101	497
		143102	497
		143110	497
		143111	497
		143112	497
		143120	279
		143121	279
		143124	279
		143130	497
		143131	497
		143132	497
		143151	497
		143152	497
		143160	497
		143161	497
		143162	497
		143169	497
		143170	497, 499
		143171	497, 499
		143172	497, 499
		143190	513
		143191	513
		143221	499
		143230	499
		143231	499
		143241	499
		143251	499
		143261	499
		143271	499
		143281	499
		143350	521
		143351	521
		143354	521
		143380	497
		143381	497
		143382	497
		143390	513
		143391	513
		143392	513
		143430	519
		143431	519
		143432	519
		143440	519
		143441	519
		143442	519
		143450	515
		143451	515
		143454	515
		143540	520
		143541	520
		143544	520
		143580	507
		143581	507
		143594	511
		143621	511
		143731	520
		143811	521
		143930	512
		143932	512
		143941	516
		143951	517

143960	517	151456	367	155530	312
143961	517	151511	263	155540	447
143990	509	151514	263	155550	266
143991	509	151531	263, 408	155551	266
		151534	263, 408	155582	267, 297, 449
144000		151591	373	155583	267, 297, 449
144010	511	151710	368	155592	267, 297, 449
144011	511	151711	368	155714	306
144019	511	151740	368	155752	375
144200	515	151741	368	155780	447
144201	515	151781	329	155790	447
144204	515	151786	329	155910	313
		151791	329	155930	313
145000		151796	329		
145990	279, 281, 283, 295, 305, 309	151800	379	156000	
145994	279, 281, 283, 295, 305, 309	151801	379	156050	268
		151803	379	156051	268
146000		151810	259	156100	297
146010	453	151811	259	156111	267, 297, 449
146332	389	151830	407	156113	267, 297, 449
146682	387	151831	407	156122	267, 297, 449
146692	387	151840	259, 379, 407	156141	296, 448
		151850	305	156143	296, 448
147000		151851	305	156152	296, 448
147301	405	151853	305		
147306	405	151950	242	158000	
147311	405	151952	242	158400	301
147316	405	151960	242	158410	303
147321	405	151962	242	158799	243
147326	405				
147360	411	152000		161000	
147361	411	152010	407	161271	231
147370	411	152011	407	161291	231
147371	411	152020	407	161461	272
147380	411	152021	407		
147381	411	152101	259	165000	
147441	415	152230	541	165358	319
147442	415	152231	541	165359	319
147443	415	152232	541	165390	317
147444	415	152240	541	165400	317
147529	373	152241	541	165410	317
147550	409	152242	541		
147551	409	152320	538	181000	
147559	409	152321	538	181530	485
		152330	399	181531	485
		152331	399	181532	485
148000					
148001	271	152340	383	186000	
148002	271	152341	383	186300	485
148004	270	152360	301	186301	485
148005	271	152370	303	186302	485
148010	357	152380	232	186310	485
148012	361	152381	232	186311	485
148013	361	152430	543	186312	485
148016	361	152431	543	186330	485
148018	356	152600	540	186331	485
148019	359	152601	540	186332	485
148060	360	152610	540	186340	485
148070	233	152611	540	186341	485
148071	233	152640	543	186342	485
148091	359	152641	543	186350	485
148540	388	152750	537	186351	485
		152751	537	186352	485
149000		152780	537	186360	485
149381	305	152781	537	186361	485
149387	305	152960	543	186362	485
149388	305	152961	543	186640	485
149452	381			186641	485
149471	334	153000		186642	485
149511	334	153130	536		
149762	332	153140	535	210000	
149772	332	153141	535	210060	318, 878
		153420	537	210061	878
		153421	537	210064	878
151000					
151040	314	153560	539	220000	
151041	314	153561	539	220000	879
151049	314	153564	539		
151271	366	153850	537	227000	
151275	366	153851	537	227176	779
151282	337			227195	768
151320	362	155000		227219	657
151321	362	155156	273	227220	657
151410	367	155180	427	227221	657
151411	367	155236	427	227410	694
151450	367	155373	269		
151451	367	155490	448		

227418	694	229961	812	232195	676, 677
227462	848	229965	812	232285	781
227505	689	229971	813	232294	682
227600	854	229975	813	232295	682
227604	854	230000		232431	755
227680	857	230030	759	232435	752
227684	857	230034	759	232441	753
227922	667, 668	230044	746	232445	753
228000		230045	746	232461	752
228100	667	230060	631, 661, 671, 685	232465	752
228110	667	230061	671	232485	773
228130	667	230063	671	232491	773
228332	849	230066	671	232495	773
228342	849	230069	671	232497	773
228412	839	230084	747	232531	741
228430	845	230085	747	232535	741
228434	845	230090	642	232537	741
228555	699	230355	779	232905	771
228560	699	230365	765	232915	771
228712	653, 665, 685	230435	660	233000	
228722	653, 665	230444	746	233094	811
228725	881	230445	746	233095	811
228730	881	230465	659	233104	785
228752	685	230655	747	233105	785
228753	613, 659	230657	747	233114	764
228754	633, 637	231000		233115	764
228771	761	231010	758	233134	783
228775	761	231012	758	233135	783
228776	761	231015	758	233145	685
228925	665	231035	696	233165	685
228935	665	231072	693	233185	685
228945	665	231205	743	233214	764, 783, 785
228960	663	231215	637	233215	764, 783, 785
228965	663	231225	637	233245	809
229000		231230	633, 637, 640, 641	233255	809
229020	646	231231	681	233302	761
229021	646	231233	648, 649, 655, 669, 673	233427	642
229022	646, 647	231235	649	233437	643
229062	827	231305	681	233447	640
229071	815	231315	780	233457	640
229072	815	231351	762	233500	840
229075	815	231355	762	233540	847
229081	815	231370	649	233570	698
229085	815	231371	649	233571	698
229090	697	231410	647	233580	698
229110	825	231411	647	233582	698
229162	668	231420	648	233601	823
229172	668	231440	649	233605	823
229200	847	231455	675	233615	823
229230	846	231457	675	233621	823
229234	847	231475	672	233625	823
229320	843	231505	685	233635	822
229324	843	231515	808	233639	822
229374	843	231525	703	233650	825
229381	839	231535	703	233660	825
229383	839	231541	801	233792	849
229410	641	231545	801	234000	
229411	641	231585	778	234505	736
229420	643	231595	672	234515	735
229421	643	231805	768	234525	737
229422	642, 643, 645, 662	231807	768	234535	797
229430	645	231815	675	461000	
229431	645	231817	675	461060	868
229432	645	231960	692	464804	873
229524	736	231961	692	631000	
229525	736	232000		631337	433
229531	735	232045	777	631339	433
229532	735	232055	799	900000	
229535	735	232065	659	900011	697, 698
229551	797	232075	659	955000	
229554	797	232085	659	955135	880
229555	797	232101	775	961000	
229564	737	232105	775	961034	879
229565	737	232115	633	961037	878
229574	735	232119	633	961250	878
229575	735	232125	633	961270	878
229664	775	232135	678		
229665	775	232145	678		
229702	827	232155	676		
229740	695	232165	676		
229741	697	232175	677		
229931	817	232185	677		
229935	817				

1000100			
1000127	403	1000634	367
1000128	403	1000638	362
1000129	403	1000639	362
1000130	403	1000640	362
1000131	403	1000655	849
1000132	403	1000665	662
1000135	403	1000666	662
1000136	403	1000668	341
		1000669	341
		1000670	341
1000300		1000682	666
1000327	377	1000683	666
1000329	377	1000685	253
1000330	377	1000686	253
1000332	801	1000688	253
1000333	767	1000689	253
1000334	767	1000691	253
1000335	781	1000692	253
1000336	779	1000694	253
1000339	801	1000695	253
1000340	767	1000700	
1000342	767	1000702	405
1000343	673	1000703	405
1000344	673	1000704	405
1000345	673	1000711	516
1000346	673	1000712	517
1000384	849	1000713	511
1000398	659, 661	1000714	228
1000400		1000715	228
1000422	365	1000716	228
1000423	365	1000717	228
1000458	567	1000718	228
1000459	567	1000719	228
1000461	567	1000720	228
1000462	567	1000721	228
1000464	567	1000726	165
1000465	567	1000729	379
1000466	569, 571	1000730	379
1000468	569, 571	1000735	699
1000469	569, 571	1000736	699
1000473	569	1000763	448
1000474	569	1000773	296
1000476	569	1000777	339
1000477	569	1000780	339
1000479	569	1000783	274
1000480	569	1000784	274
1000487	569	1000785	274
1000489	569	1000786	274
1000497	573	1000797	780
1000498	573	1000799	684
1000500		1000800	
1000523	573	1000801	684
1000524	573	1000807	261
1000525	573	1000808	261
1000533	573	1000809	261, 306
1000534	573	1000810	261, 306
1000535	575	1000811	261, 306
1000536	575	1000812	261, 306
1000540	574	1000813	306
1000546	574	1000820	777
1000549	574	1000821	661
1000557	575	1000822	661
1000558	575	1000823	799
1000560	574	1000824	351
1000561	574	1000825	353
1000566	574	1000833	237
1000567	574	1000880	783
1000571	574	1000881	783
1000574	239	1000886	413
1000575	239	1000887	413
1000576	238	1000889	413
1000577	238	1000890	413
1000579	267, 297, 449	1000892	413
1000580	267, 297, 449	1000893	413
		1000895	413
		1000896	413
1000600			
1000613	351	1000900	
1000614	353	1000909	880
1000615	353	1000910	377
1000616	351	1000911	377
1000618	351	1000914	218
1000621	353	1000915	218
1000623	353		
1001000			
1001015		1000917	218
1001016		1000926	293
1001017		1000927	293
1001018		1000929	293
1001019		1000930	293
1001020		1000932	293
		1000933	293
		1000935	293
		1000936	293
		1000957	297
1001100			
1001165		1001165	235
1001166		1001166	235
1001167		1001167	235
1001168		1001168	235
1001169		1001169	235
1001171		1001171	235
1001172		1001172	235
1001200			
1001254		1001254	853
1001255		1001255	853
1001256		1001256	853
1001262		1001262	853
1001263		1001263	853
1001264		1001264	237
1001272		1001272	380
1001273		1001273	380
1001274		1001274	380
1001275		1001275	380
1001276		1001276	380
1001283		1001283	431
1001284		1001284	431
1001286		1001286	431
1001287		1001287	431
1001299		1001299	341
1001300			
1001300		1001300	341
1001303		1001303	341
1001304		1001304	341
1001309		1001309	293
1001310		1001310	293
1001314		1001314	817
1001359		1001359	853
1001400			
1001400		1001400	291
1001403		1001403	291
1001406		1001406	291
1001409		1001409	291
1001460		1001460	452
1001461		1001461	452
1001462		1001462	452
1001463		1001463	452
1001468		1001468	388
1001472		1001472	388
1001488		1001488	669
1001489		1001489	669
1001490		1001490	669
1001494		1001494	669
1001500			
1001505		1001505	275
1001506		1001506	275
1001508		1001508	275
1001509		1001509	275
1001542		1001542	279, 281, 283, 295, 305, 307
1001574		1001574	861
1001575		1001575	861
1001700			
1001701		1001701	312
1001800			
1001861		1001861	521
1001868		1001868	513

1001869	513	1002203	701	1002890	167
1001871	539	1002215	263, 408	1002891	167
1001872	539	1002216	263	1002893	841
		1002218	868	1002895	841
1001900		1002219	869	1002897	841
1001901	170	1002228	335	1002898	841
1001902	170	1002229	335	1002899	841
1001903	170	1002238	357		
1001905	171	1002239	371	1002900	
1001906	171	1002240	371	1002900	721
1001907	171			1002902	721
1001930	234	1002400		1002903	807
1001931	234	1002402	745	1002904	807
1001939	272	1002403	745	1002905	783
1001950	153, 157, 161, 165	1002423	875	1002906	631
1001951	153, 157, 161, 165	1002424	875	1002907	631
1001952	153, 157, 161, 165	1002425	875	1002909	188
1001962	697	1002430	387	1002910	188
1001963	697	1002431	387	1002911	188
1001964	694	1002432	387	1002912	188
1001965	694	1002494	663	1002913	189
1001968	509			1002914	189
1001969	762	1002500		1002915	193
1001970	762	1002503	763	1002917	193
1001999	655	1002504	763	1002918	193
1002000		1002505	763	1002919	193
1002000	655	1002583	453, 601	1002922	243
1002001	655	1002591	221	1002925	373
1002002	777	1002592	221	1002927	373
1002003	257	1002594	221	1002928	363
1002004	255	1002600		1002929	363
1002005	255	1002602	482	1002931	379
1002006	255	1002603	482	1002933	379
1002008	257	1002604	482	1002934	261
1002010	255	1002607	387	1002936	261
1002011	255	1002608	387	1002937	305
1002012	255	1002686	535	1002939	305
1002013	255	1002690	491	1002941	426
1002015	255	1002691	868	1002948	311
1002018	765	1002692	868	1002949	311
1002020	423	1002693	868	1002950	311
1002021	423	1002694	491	1002951	310
1002022	423	1002695	491	1002952	760
1002023	405	1002696	491	1002953	760
1002024	405	1002697	485	1002954	760
1002025	405	1002698	485	1002955	760
1002029	411	1002699	485	1002956	679
1002030	411			1002957	679
1002032	739	1002700		1002958	679
1002033	739	1002700	485	1002959	679
1002034	739	1002701	485	1002962	329
1002035	773	1002702	485	1002964	329
1002045	315	1002703	485	1002965	261
1002046	315	1002704	485	1002967	272
1002069	759	1002705	485	1002968	272
1002070	759	1002791	872	1002969	401
1002075	425			1002970	401
1002076	425	1002800		1002971	401
1002077	425	1002842	363	1002973	401
1002098	244	1002843	363	1002974	401
1002099	244	1002844	363	1002975	401
1002100		1002845	497	1002976	401
1002100	244	1002853	723, 725, 727, 729, 730, 777	1002977	401
1002101	244	1002854	520	1002978	401
1002102	244	1002855	381	1002979	241
1002110	517	1002860	389	1002980	241
1002111	517	1002861	489	1002981	241
1002113	517	1002862	489	1002982	243
1002116	387	1002863	489	1002989	770
1002117	387	1002864	490	1002990	770
1002118	387	1002865	490	1002991	681
1002119	387	1002866	490	1002992	681
1002140	383	1002867	785		
1002151	495	1002868	769	1003000	
1002152	495	1002869	769	1003001	683
1002153	495	1002871	652	1003004	281
1002163	279, 281, 283, 295	1002873	509	1003005	281
1002190	333	1002874	509	1003006	281
1002191	333	1002875	509	1003007	281
1002192	333	1002876	535	1003008	223
1002200		1002877	535	1003009	223
1002201	701	1002878	535	1003010	223
		1002882	165	1003011	225
		1002884	785	1003012	225

1003013	225	1003508	339	1004737	591
1003014	419	1003518	811	1004738	376
1003015	419	1003519	811	1004739	376
1003016	419	1003530	290	1004740	370
1003017	417	1003532	290	1004741	370
1003018	417	1003535	651	1004742	370
1003019	417	1003536	650	1004743	370
1003029	448	1003537	651	1004744	281, 295, 309, 318
1003040	275	1003538	651	1004745	281, 295, 309
1003041	275	1003539	775	1004746	281, 295, 309
1003042	275			1004747	749
1003043	275	1004600		1004748	749
1003044	289	1004649	785	1004749	629
1003045	289	1004650	756	1004750	629
1003046	289	1004651	756	1004751	629
1003047	289	1004652	701	1004757	693
1003048	289	1004653	808	1004759	188
1003049	289	1004660	349	1004760	188
1003050	289	1004661	349	1004761	188
1003051	289	1004662	349	1004762	188
1003052	275	1004663	349	1004763	188
1003053	275	1004664	399	1004764	188
1003054	275	1004665	399	1004765	189
1003055	275	1004666	258	1004766	189
1003073	243	1004667	258	1004767	189
1003074	243	1004668	229	1004768	189
		1004669	229	1004769	194
1003100		1004670	355	1004770	194
1003104	870	1004671	355	1004771	194
1003105	871	1004674	295, 309	1004772	194
1003106	869	1004675	295, 309	1004773	296, 448
		1004676	295	1004774	267, 297, 449
1003300		1004677	797	1004775	267, 297, 449
1003316	369	1004678	757	1004780	875
1003317	369	1004679	757	1004781	876
		1004680	653	1004782	877
1003400		1004681	653	1004783	497
1003416	729	1004682	376	1004784	497
1003417	729	1004686	533	1004785	497
1003418	730	1004687	533		
1003419	730	1004688	533	1004800	
1003420	795	1004689	533	1004889	570
1003421	795	1004690	533	1004890	570
1003422	725	1004691	533	1004893	571
1003423	725	1004692	533	1004894	571
1003424	727	1004693	533	1004895	571
1003425	727	1004694	223	1004896	577
1003426	793	1004695	223	1004897	577
1003427	793	1004696	223	1004898	577
1003428	375	1004697	225	1004899	577
1003429	375	1004698	225		
1003430	375	1004699	225	1004900	
1003431	375			1004900	578
1003432	307	1004700		1004901	578
1003435	300	1004700	419	1004902	578
1003436	300	1004701	419	1004903	579
1003437	729	1004702	419	1004904	579
1003438	730	1004705	417	1004905	577
1003439	795	1004706	382	1004906	577
1003440	725	1004707	382	1004907	577
1003441	727	1004708	582	1004908	577
1003442	793	1004709	582	1004909	578
1003443	692	1004710	582	1004910	578
1003448	692	1004712	583	1004911	579
1003449	813	1004713	583	1004912	578
1003450	813	1004714	583	1004913	578
1003451	813	1004716	584	1004914	578
1003452	813	1004717	584	1004915	578
1003453	759	1004718	584	1004916	578
1003454	759	1004719	584	1004917	578
1003455	384	1004720	585	1004932	575
1003456	385	1004721	585	1004933	507
1003457	384	1004722	586	1004934	507
1003458	385	1004723	586	1004935	507
1003459	385	1004725	587	1004936	507
1003460	385	1004726	591	1004957	785
1003466	240	1004727	589	1004969	349
1003467	364	1004729	330	1004970	453
1003468	364	1004730	330	1004971	337
1003470	721	1004731	331		
1003479	792, 793, 795	1004732	359	1005000	
		1004733	356	1005075	862
1003500		1004734	591	1005076	862
1003506	339	1004735	591	1005077	862
1003507	339	1004736	591	1005078	862

1005079	862	1005315	862	1006195	874
1005080	862	1005316	862	1006196	874
1005081	862	1005317	864	1006197	874
1005082	862	1005318	864	1006198	875
1005083	862	1005381	869	1006199	874
1005085	420	1005387	873	1006200	
1005086	420	1005390	445	1006202	873
1005087	421	1005391	445	1006268	719
1005088	421	1005392	445	1006270	719
1005089	814	1005394	445		
1005090	814	1005395	288	1006300	
		1005396	288	1006307	355
1005100		1005397	532	1006308	355
1005125	755	1005399	532	1006314	749
1005126	755			1006316	791
1005148	739	1005400		1006317	720
1005149	739	1005400	532	1006318	720
1005150	739	1005401	532	1006319	349, 720
1005151	741	1005402	532	1006321	861
1005153	741	1005407	217	1006326	691
1005154	741	1005408	217	1006327	792
1005155	741	1005410	217	1006328	723
1005156	741	1005415	217	1006329	723
1005157	741	1005416	217	1006336	870
1005177	188	1005418	217	1006343	445
1005178	189	1005423	217	1006344	445
		1005424	217	1006345	288
1005200		1005435	220	1006348	869
1005201	744	1005436	220	1006377	295
1005202	811	1005439	630	1006378	295
1005205	725, 727, 729, 730, 731, 793	1005440	630	1006379	614, 615, 616, 617, 618, 619
1005206	725, 727, 729, 730, 731, 793	1005441	683	1006380	614, 615, 616, 617, 618, 619
1005207	725, 727, 729, 730, 731, 793	1005442	639	1006381	614, 615, 616, 617, 618, 619
1005214	318	1005443	751	1006382	614, 615, 616, 617, 618, 619
1005215	318	1005444	869	1006383	616
1005216	318	1005445	869	1006384	619
1005217	318	1005446	171, 873	1006385	618
1005218	318			1006386	621
1005248	876	1006100		1006387	617
1005262	725, 727, 729, 730, 731	1006104	855	1006388	620
1005263	725, 727, 729, 730, 731	1006105	855	1006389	617
1005265	865	1006106	839	1006390	619
1005268	865	1006107	839	1006391	618
1005269	860	1006120	877	1006392	621
1005271	860	1006121	219	1006393	617
1005272	860	1006122	219	1006394	620
1005273	861	1006123	429	1006395	281
1005274	863	1006124	429	1006396	281
1005275	863	1006125	429	1006397	281
1005276	863	1006126	429	1006398	281
1005277	863	1006127	429	1006399	281
1005278	863	1006128	429		
1005279	863	1006133	871	1006400	
1005280	863	1006134	872	1006400	281
1005281	863	1006155	508	1006402	281
1005282	863	1006156	508	1006403	281
1005283	863	1006157	534	1006404	717
1005284	860	1006158	534	1006405	717
1005285	860	1006159	309, 508, 534	1006406	821
1005286	860	1006160	309, 508, 534	1006407	821
1005287	860	1006161	382	1006408	627
1005288	860	1006162	382	1006409	627
1005289	865	1006171	851	1006410	318
1005290	865	1006172	851	1006411	157
1005291	863	1006173	851	1006412	157
1005292	863	1006174	851	1006414	157
1005294	864	1006175	851	1006415	157
1005295	864	1006176	851	1006417	157
1005296	864	1006178	742	1006418	157
1005297	862	1006179	742	1006420	157
1005298	862	1006180	635	1006421	157
1005299	862	1006181	635	1006423	395
		1006182	635	1006424	395
1005300		1006183	743	1006425	397
1005301	864	1006184	637	1006426	397
1005302	864	1006185	191	1006427	397
1005303	864	1006186	191	1006428	397
1005305	865	1006187	191	1006429	397
1005307	865	1006188	191	1006430	397
1005308	865	1006189	191	1006431	285
1005310	865	1006190	191	1006432	285
1005311	861	1006191	691	1006433	285
1005312	861	1006192	691	1006434	285
1005313	863	1006193	691	1006435	285
1005314	863	1006194	874		

1006436	285	1006633	475	1007250	870
1006437	285	1006634	475	1007251	870
1006438	285	1006635	475	1007252	870
1006439	397	1006636	475	1007253	870
1006440	397	1006639	477	1007254	871
1006441	347	1006640	477	1007255	871
1006442	347	1006641	477	1007256	871
1006443	347	1006642	477	1007257	871
1006444	347	1006645	477	1007270	876
1006445	505	1006646	477	1007271	208
1006446	505	1006647	477	1007272	208
1006449	285, 347, 395, 505	1006648	477	1007273	209
1006450	285, 347, 395, 505			1007274	209
1006451	285, 347, 395, 505			1007281	711
1006452	868			1007282	711
1006453	881	1007084	459, 463, 467	1007283	880
1006454	243, 874	1007090	207	1007284	150
1006455	875	1007091	207	1007285	150
1006456	873	1007092	207	1007286	152
		1007093	207	1007287	152
1006500		1007094	207	1007288	150
1006565	459, 463, 467	1007095	205	1007289	150
1006566	459, 463, 467	1007096	205	1007290	152
1006567	459, 463, 467	1007097	205	1007291	152
1006568	459, 463, 467	1007098	205	1007292	150
1006569	459, 463, 467	1007099	205	1007293	150
1006570	459, 463, 467			1007294	152
1006571	459, 463, 467			1007295	152
1007100		1007137	459, 463, 467	1007296	150
1006572	459, 463, 467	1007138	459, 463, 467	1007297	150
1006573	459, 463, 467	1007142	715	1007298	152
1006574	459, 463, 467	1007143	715	1007299	152
1006575	459	1007144	715		
1006576	459	1007145	715		
1006577	459	1007146	689	1007300	
1006578	459	1007147	689	1007300	151
1006579	459	1007180	205	1007301	151
1006580	459	1007181	205	1007302	153
1006581	463	1007182	205	1007303	153
1006582	463	1007183	205	1007304	151
1006583	463	1007184	207	1007305	151
1006584	463	1007185	207	1007306	153
1006585	463	1007186	207	1007307	153
1006586	463	1007187	207	1007308	151
1006587	467	1007188	463, 467	1007309	151
1006588	467	1007189	463, 467	1007310	153
1006589	467	1007190	285, 347, 395, 505	1007311	153
1006590	467	1007191	207	1007312	151
1006591	467	1007192	205	1007313	151
1006592	467	1007193	205	1007314	153
1006593	459	1007194	207	1007315	153
1006594	459	1007195	831	1007316	161
1006595	463	1007196	831	1007317	161
1006596	463	1007197	831	1007318	161
1006597	467	1007198	831	1007319	161
1006598	467			1007320	161
1006599	459, 463, 467			1007321	161
		1007200		1007322	161
1006600		1007200	331	1007323	161
1006600	459, 463, 467	1007201	331	1007324	161
1006601	459, 463, 467	1007202	331	1007325	161
1006602	459, 463, 467	1007207	744	1007326	161
1006603	459, 463, 467	1007213	872	1007327	161
1006604	459, 463, 467	1007215	872	1007328	126
1006605	459, 463, 467	1007216	876	1007329	126
1006606	459, 463, 467	1007225	876	1007330	126
1006607	459, 463, 467	1007226	872	1007331	126
1006608	459, 463, 467	1007228	872	1007332	126
1006609	459, 463	1007229	873	1007333	126
1006610	467	1007230	861	1007334	126
1006611	459	1007231	861	1007335	126
1006612	459	1007232	614	1007336	126
1006613	459, 463, 467	1007233	614	1007337	126
1006614	459, 463, 467	1007234	615	1007338	126
1006615	473	1007235	615	1007339	126
1006616	473	1007236	714	1007340	126
1006617	473	1007237	613	1007341	126
1006618	473	1007238	835, 837	1007342	126
1006621	475	1007239	835, 837	1007343	126
1006622	475	1007240	835, 837	1007344	126
1006623	475	1007241	837	1007345	126
1006624	475	1007242	837	1007346	126
1006627	473	1007243	835	1007347	126
1006628	473	1007244	835	1007348	126
1006629	473	1007245	835	1007349	126
1006630	473	1007246	837	1007350	126

1007351	126	1007443	126	1007597	279, 505, 531
1007352	503	1007444	126	1007598	279
1007353	503	1007445	126	1007599	279
1007354	503	1007446	126	1007600	
1007355	529	1007447	126	1007600	327
1007356	529	1007448	126	1007601	327
1007357	437, 597	1007449	126	1007602	327
1007358	437, 597	1007450	126	1007603	327
1007359	437, 597	1007451	126	1007604	251
1007360	437, 597	1007452	126	1007605	251
1007361	437, 597	1007453	126	1007606	251
1007362	437, 597	1007454	126	1007607	251
1007363	443	1007458	805	1007608	395
1007364	443	1007459	607	1007609	395
1007365	443	1007460	607	1007610	395
1007366	443	1007461	791	1007611	395
1007368	138	1007462	444	1007612	325
1007369	138	1007463	444	1007613	325
1007370	138	1007464	444	1007614	325
1007371	138	1007465	444	1007615	325
1007372	138	1007466	444	1007616	325
1007373	138	1007467	444	1007617	325
1007374	138	1007468	287	1007618	325
1007375	138	1007469	287	1007619	325
1007376	138	1007470	287	1007620	443
1007377	138	1007471	287	1007621	443
1007378	138	1007472	287	1007622	443
1007379	138	1007473	287	1007623	443
1007380	441, 601	1007488	126	1007624	139
1007381	124	1007489	126	1007625	139
1007382	124			1007626	139
1007383	124	1007500		1007627	139
1007384	124	1007511	805	1007628	139
1007385	134	1007512	609	1007629	139
1007386	134	1007513	609	1007630	126
1007387	134	1007521	178	1007631	126
1007388	134	1007522	178	1007632	126
1007389	134	1007523	178	1007633	126
1007390	134	1007524	178	1007634	126
1007391	134	1007525	178	1007635	126
1007392	134	1007526	178	1007636	126
1007393	134	1007527	178	1007637	126
1007394	134	1007528	178	1007638	501
1007395	134	1007529	178	1007639	501
1007396	134	1007530	178	1007640	501
1007397	134	1007531	178	1007641	503
1007398	134	1007532	178	1007642	503
1007399	134	1007533	178	1007643	503
1007400		1007534	178	1007644	527
1007400	134	1007535	178	1007645	527
1007401	137	1007536	178	1007646	527
1007402	137	1007537	178	1007647	527
1007403	137	1007538	178	1007648	529
1007404	137	1007539	178	1007649	529
1007405	135	1007540	178	1007651	603
1007406	135	1007541	178	1007652	603
1007407	135	1007542	178	1007653	805
1007408	135	1007543	178	1007654	525
1007409	125	1007544	178	1007655	525
1007410	125	1007545	178	1007656	525
1007411	125	1007546	178	1007657	525
1007412	125	1007547	178	1007667	713
1007421	124	1007551	213	1007668	713
1007422	124	1007552	213	1007669	611
1007423	135	1007559	213	1007670	611
1007424	135	1007560	213	1007673	501
1007425	135	1007567	213	1007674	501
1007426	135	1007568	213	1007680	833
1007427	135	1007580	605	1007681	833
1007428	135	1007581	709	1007682	833
1007429	135	1007582	789	1007683	833
1007430	135	1007583	605	1007684	833
1007431	125	1007584	605	1007685	833
1007432	125	1007585	709	1007686	439, 599
1007433	136	1007586	789	1007687	439, 599
1007434	136	1007587	605	1007688	439, 599
1007435	136	1007588	279	1007689	439, 599
1007436	136	1007589	279	1007690	439, 599
1007437	136	1007590	393	1007691	439, 599
1007438	136	1007591	393	1007692	439, 599
1007439	137	1007592	393	1007693	439, 599
1007440	137	1007593	393	1007694	439, 599
1007441	137	1007594	345	1007695	439, 599
1007442	137	1007595	345	1007696	439, 599
		1007596	279, 505, 531	1007697	439, 599

SIGHT MOVE
1004690





1-PHASE	
1-PHASE SURFACE-MOUNTED TRACK	495
1-PHASE SURFACE-MOUNTED TRACK	
ACCESSORIES	497
1-PHASE RECESSED TRACK	499
1-PHASE RECESSED TRACK ACCESSORIES	499
3-PHASE	
EUTRAC® 3-PHASE SURFACE-MOUNTED	
TRACK	537
EUTRAC® 3-PHASE SURFACE-MOUNTED	
TRACK ACCESSORIES	539
EUTRAC® 3-PHASE RECESSED TRACK	541
EUTRAC® 3-PHASE RECESSED TRACK	
ACCESSORIES	541
S-TRACK 3-PHASE MOUNTING RAIL DALI	529
S-TRACK 3-PHASE MOUNTING RAIL DALI	
ACCESSORIES	530-531
S-TRACK 3-PHASE RECESSED TRACK	
DALI	533
S-TRACK 3-PHASE RECESSED TRACK	
DALI ACCESSORIES	535
48V SYSTEMS	
48V TRACK MOUNTING TRACK DALI	457
48V TRACK MOUNTING TRACK DALI	
ACCESSORIES	459
48V TRACK MOUNTING TRACK DEEP DALI	461
48V TRACK MOUNTING TRACK DEEP DALI	
ACCESSORIES	463
48V TRACK RECESSED TRACK DALI	465
48V TRACK RECESSED TRACK DALI	
ACCESSORIES	467
A	
ABRIDOR 100 POLE	681
ABRIDOR 60 POLE	681
ABRIDOR SENSOR WL	770
ABRIDOR WL	770
ACCESSORIES	
CABLE CLAMP	878
CABLE EXTENSION	879
CEILING HOOK	878
CONNECTION BOX IP68, 5-PIN, DALI	881
CONTROLLER LED STIP CCT / RGBW	869
CONVERTER PHASE DIM -> DALI	868
DALI CONTROLLER 24V DC	869
DALI INTERFACE 1-10V + ON/OFF	868
DALI UNIVERSAL DIMMER 10-300W	869
DOUBLE-SIDED TAPE	879
GLENOS® CEILING ROSETTE	878
GU10 CONNECTION BOX WITH BASE,	
UNIVERSAL	880
GU10 LED CONNECTION BOX WITH BASE	
MAX. 10W	880
GU10 SOCKET	880
LED DRIVER 100W 24V DC DALI	
DIMMABLE INCLUDING STRAIN RELIEF	871
LED DRIVER 100W 24V DC INCLUDING	
STRAIN RELIEF	870
LED DRIVER 10W 200MA DIMMABLE	
INCLUDING STRAIN RELIEF	872
LED DRIVER 10W 250MA	875
LED DRIVER 12W 250MA DALI DIMMABLE	
WITH RF INTERFACE	874
LED DRIVER 150W 24V DC DALI DIMMABLE	
INCLUDING STRAIN RELIEF	871
LED DRIVER 150W 24V DC INCLUDING	
STRAIN RELIEF	870
LED DRIVER 20W 250-700MA 1-10V/	
DALI DIMMABLE	875
LED DRIVER 20W 350MA DIMMBAR	872
LED DRIVER 20W 350MA	876
LED DRIVER 20W 350MA/500MA PHASE	872
LED DRIVER 20W 700MA DIMMABLE	873
LED DRIVER 21W 500MA INCLUDING	
STRAIN RELIEF	876
LED DRIVER 250W 24V DC DALI DIMMABLE	
INCLUDING STRAIN RELIEF	871
LED DRIVER 250W 24V DC INCLUDING	
STRAIN RELIEF	870
LED DRIVER 25W 150-300MA	
DALI DIMMABLE	873
LED DRIVER 25W 150-700MA	
DALI DIMMABLE	873
LED POWER SUPPLY 100W 24V	
2 CHANNEL DALI DIMMABLE	872
LED POWER SUPPLY 100W 24V DC	871
LED POWER SUPPLY 15W 12V	869
LED POWER SUPPLY 15W 24V	869
LED POWER SUPPLY 20W 12/24V	869
LED POWER SUPPLY 25W 24V	870
LED POWER SUPPLY 50W 24V	870
LED POWER SUPPLY 60W DALI, 24V,	
2 CHANNEL DALI DIMMABLE	871
WIRE ROPE SUSPENSION	878
ADEGAN FL, E27	663
ADEGAN MANILA FL, E27	663
ADI EL	822
AINOS CW	812
AINOS CW SENSOR	813
AINOS CW SENSOR, SQUARE	813
AINOS CW, SQUARE	813
AKALO D83 EL	237
ALPA CONE 100 POLE, E27	665
ALPA MUSHROOM 45 POLE, E27	665
ALPA MUSHROOM 75 POLE, E27	665
ALTRA DICE CL, QPAR51	263
ALTRA DICE CW, DOUBLE, QPAR51	263, 408
ALTRA DICE TRACK 1-PHASE, QPAR51	521
ALTRA DICE TRACK 3-PHASE, QPAR51	556
ANDREAS WL, QT-DE12	373
ANELA CL, PHASE	261
ANELA PD, PHASE	306
ANGOLUX SENSOR WL	762
ANGOLUX WL	762
APONI 120 POLE, PHASE	666
APONI 90 POLE, PHASE	666
ARLINA 130 WL	371
ARLINA 60 WL	371
ARROCK ARC POLE, QPAR51	648
ARROCK GRANITE 40 POLE, SQUARE, E27	647
ARROCK GRANITE 70 POLE, SQUARE, E27	647
ARROCK SLOT POLE, QPAR51	649
ARROCK STONE 50 POLE	649
ARROCK STONE 75 POLE	649
ASMARA LV, QR-C51	486
ASSO 300 WL, PHASE	366, 367
ASTINA CL, QPAR51	261
ASTINA PD, QPAR51	305
ASTINA STEEL WL, QPAR51	761
ASTINA UP/DOWN WL, QPAR51	379
ASTINA WL, QPAR51	761
ASTO CW, DOUBLE, QPAR51	415
ASTO CW, QUAD, QPAR51	415
ASTO CW, SINGLE, QPAR51	415
ASTO CW, TRIPLE, QPAR51	415
ASTO TUBE 1-PHASE, GU10	505
ASTO TUBE CL, SINGLE, GU10	395
ASTO TUBE CW, DOUBLE, GU10	397
ASTO TUBE CW, QUADRUPLE, GU10	397
ASTO TUBE CW, SINGLE, GU10	397
ASTO TUBE CW, TRIPLE, GU10	397
ASTO TUBE DECORATIVE	
REFLECTOR	285, 395, 505
ASTO TUBE PD, DOUBLE, GU 10	285
ASTO TUBE PD, QUADRUPLE, GU 10	285
ASTO TUBE PD, SINGLE, GU 10	285
ASTO TUBE PD, TRIPLE, GU 10	285
ASTO TUBE WL, SINGLE, GU10	347
ASTO TUBE WL, UP/DOWN, GU10	347
AVO CW, DOUBLE, QPAR51	413
AVO CW, QUAD, QPAR51	413
AVO CW, SINGLE, QPAR51	413
AVO CW, TRIPLE, QPAR51	413
AVO TRACK 1-PHASE, QPAR51	515
AVO TRACK 3-PHASE, QPAR51	561
B	
BASKET WL, E27	373
BATTEN 120 CW	429
BATTEN 60 CW	429
BENA 120 CW	433
BENA 150 CW	433
BIG NAILS 50 POLE, E27	668
BIG NAILS 80 POLE, E27	668
LED DRIVER 25W 150-700MA	
DALI DIMMABLE	873
LED NAUTILUS SP, ROUND, QPAR51	694
BIG PLOT COVER, 2-PACK	853
BIG PLOT COVER, 4-PACK	853
BIG PLOT MODULES	853
BIG QUAD UP/DOWN WL	755
BIG QUAD WL	752, 755
BIG THEO CL	797
BIG THEO CL, QPAR111	797
BIG THEO UP/DOWN WL, QPAR111	735
BIG THEO WL	737
BIG THEO WL, QPAR111	737
BIMA 1-PHASE, DOUBLE, QPAR51	519
BIMA 1-PHASE, SINGLE, QPAR51	519
BIMA 3-PHASE, DOUBLE, QPAR51	559
BIMA 3-PHASE, SINGLE, QPAR51	559
BOOKAT POLE	683
BOOKAT WL	751
BOX UP/DOWN WL, QT-DE12	773
BOX-L WL	773
BOX-L WL, E27	773
BRICK DOWNUNDER EL	827
BRICK DOWNUNDER EL, E14	827
BRICK EL, ASYMMETRICAL	825
BRICK EL, SYMMETRICAL	825
BRICK MESH EL	825
BULAN CW, E14	815
BULAN GRID CW, E27	815
C	
C-POL POLE, E27	672
CARISO WL, PHASE	368
CHROMBO WL, PHASE	369
COMET LED LV	491
COMET LV, QR-C51	491
CONCRETO EL, CUT	821
CONCRETO EL, WING	821
CONCRETO FL, SQUARE, QPAR51	627
CONCRETO FL, ROUND, QPAR 51	627
CONCRETO L WL	717
CONCRETO M WL	717
CONE FL, E27	660
COSMIC LV, QR-C51	487
COUPA FLEX WL	381
CUBIX FL, QPAR51	660
CYFT CW	395
D	
DASAR® 115 RL, SQUARE, QPAR51	843
DASAR® 115 RL, RUND, QPAR51	843
DASAR® 1200 EL	831
DASAR® 215 RL, SQUARE, QPAR111	847
DASAR® 215 RL, ROUND, E27	847
DASAR® 215 RL, ROUND, QPAR111	846
DASAR® 255 EL	839
DASAR® 270 EL, ASYMMETRICAL	841
DASAR® 270 EL, SYMMETRICAL	841
DASAR® 370 EL, ROUND	847
DASAR® 600 EL	831
DASAR® 920 EL	840
DASAR® 920 SP, 230V	698
DASAR® EXACT 116 EL, SQUARE, QPAR51	845
DASAR® EXACT 116 EL, ROUND, QPAR51	845
DASAR® FLAT 120 EL	839
DASAR® FLAT 80 EL	839
DASAR® L RL, SQUARE	835
DASAR® L RL, ROUND	835
DASAR® PROJECTOR SP, 12/24V	698
DASAR® S RL, SQUARE	833
DASAR® S RL, ROUND	833
DASAR® XL RL, SQUARE	837
DASAR® XL RL, ROUND	837
DEKLED EL	234
DELWA WL	767
DENA 30 WL, E14	373
DIO FLEX PLATE WL	387
DIO FLEX PLATE WL QPAR51	387
DIRETO 60 WL, PHASE	370
DIRETO 90 WL, PHASE	370
DISPLAY ADL 50 QPAR51	389
DL 126 EL	227
DORISA 30 WL	339
DORISA 50 WL	339
DOWNUNDER OUT L EL	823
DOWNUNDER OUT M EL	823

DOWNUNDER OUT S EL	823	FORCHINI M 50 PD, E27	313
DOWNUNDER OUT WL, SQUARE	769	FRAME BASIC	238
DOWNUNDER OUT WL, ROUND	769	FRAME BASIC RL, HV	238
DOWNUNDER PUR 150 EL	242	FRAME BASIC SET RL	238
DOWNUNDER PUR 80 EL	242	FRAME CURVE EL	239
DURNO LV	489		
E			
ENOLA B CL, QPAR51	259	GALEN 120 SP	692
ENOLA B CW, DOUBLE, QPAR51	407	GALEN 60 SP	692
ENOLA B CW, SINGLE, QPAR51	407	GIMBLE OUT EL	849
ENOLA B PD, QPAR51	305, 517	GLENOS® 60 WL	339
ENOLA B TRACK 1-PHASE, QPAR51	517	GLENOS® PD, 1M, 1-10V	291
ENOLA B WL, QPAR51	379	GLENOS® PD, 2M, 1-10V	291
ENOLA C CL	259	GLOO PURE 27 POLE, E27	655
ENOLA C TRACK 1-PHASE	517	GLOO PURE 44 POLE, E27	655
ENOLA C TRACK 1-PHASE	516	GLOO PURE 70 POLE, E27	655
ENOLA C TRACK 3-PHASE	561	GLOO PURE WL, E27	777
ENOLA M ASYMMETRICAL LENS	731	GRAFIT 30 POLE, E27	637
ENOLA M LENS 19°	731	GRAFIT 30 POLE, ROUND, E27	635
ENOLA OCULUS CL	792	GRAFIT 60 POLE, E27	637
ENOLA OCULUS WL, SINGLE	723	GRAFIT 60 POLE, ROUND, E27	635
ENOLA OCULUS WL, UP/DOWN	723	GRAFIT 90 POLE, E27	637
ENOLA PD, E27	305	GRAFIT 90 POLE, ROUND, E27	635
ENOLA ROUND L CL	793	GRAFIT WL, E27	743
ENOLA ROUND L WL, SINGLE	725	GRAFIT WL, SQUARE, SENSOR, E27	743
ENOLA ROUND M CL	793	GRAFIT WL, ROUND, E27	742
ENOLA ROUND M WL, SINGLE	725	GRAFIT WL, ROUND, SENSOR, E27	742
ENOLA ROUND S CL	793	GRAZIA FLEXSTRIP LED 24V	582
ENOLA ROUND S WL, SINGLE	725	GRAZIA IP FLEXSTRIP 24V	591
ENOLA S, M, L REFLECTOR, 56°	731	GRAZIA IP FLEXSTRIP RGBW, 24V	591
ENOLA SQUARE L CL	795	GRAZIA IP FLEXSTRIP	
ENOLA SQUARE L WL, SINGLE	729	TUNABLE WHITE, 24V	591
ENOLA SQUARE M CL	795	GRAZIA PRO FLEXSTRIP 24V	583, 584
ENOLA SQUARE M WL, SINGLE	729	GRAZIA PRO FLEXSTRIP RGBW, 24V	589
ENOLA SQUARE S CL	795	GRAZIA PRO FLEXSTRIP	
ENOLA SQUARE S WL, SINGLE	729	TUNABLE WHITE, 24V	587
ESKINA 30 POLE	631	GRAZIA PRO MAX FLEXSTRIP 24V	585, 586
ESKINA 80 POLE	631	GRAZIA 10 SURFACE-MOUNTED	
ESKINA D DISPLAY, PHASE	783	PROFILE 2M	567
ESKINA FRAME 125 POLE, DOUBLE	630	GRAZIA 10 SURFACE-MOUNTED	
ESKINA FRAME 175 POLE, DOUBLE	630	PROFILE, STANDARD	567
ESKINA FRAME 45 POLE, SINGLE	629	GRAZIA 10 ACCESSORIES	569
ESKINA FRAME 75 POLE, DOUBLE	629	GRAZIA 10 EDGE 2 M	570
ESKINA FRAME 75 POLE, SINGLE	629	GRAZIA 10 RECESSED PROFILE	567
ESKINA FRAME CL, SINGLE	791	GRAZIA 10 EDGE ACCESSORIES	571
ESKINA FRAME WL	749	GRAZIA 20 SURFACE-MOUNTED	
ESKINA FRAME WL, DOUBLE	749	PROFILE, FLAT, 3M	573
ESKINA SPOT CW, PHASE	807	GRAZIA 20 SURFACE-MOUNTED	
ESKINA SPOT SENSOR CW, PHASE	807	PROFILE, STANDARD, 3M	573
EURO CUBE 3-PHASE	555	GRAZIA 20 RECESSED PROFILE 3M	573
EURO SPOT TRACK 1-PHASE, QPAR51	521	GRAZIA 20 ACCESSORIES	574, 575
EURO SPOT TRACK 3-PHASE, QPAR111	555	GRAZIA 60 SURFACE-MOUNTED PROFILE	577
EURO SPOT TRACK 3-PHASE, QPAR51	555	GRAZIA 60 RECESSED PROFILE	577
		GRAZIA 60 ACCESSORIES	578, 579
F			
F-POL POLE, E27	672	H	
F-POL WL, E27	778	H-POL 30 POLE	676
FENDA 15 CM, ROUND	448	H-POL 60 POLE	676
FENDA 30 CM, ROUND	449	H-POL TWIN 30 POLE	677
FENDA BOW BASIS FL, E27	448	H-POL TWIN 60 POLE	677
FENDA FL, E27	447, 448	HELIA 30 PD	301
FENDA Ø 45 CM, ROUND	449	HELIA 30 PD, PHASE	301
FENDA Ø 70 CM, ROUND	449	HELIA 40 PD	303
FENDA PD, E27	296	HELIA 40 PD, PHASE	303
FENDA TL, E27	447	HELIA 50 TRACK 1-PHASE	507
FERA 25 CL	272	HELIA 50 TRACK 3-PHASE	561
FERA 25 CL, DALI	272	HELIA AMBIENT 35 PD	300
FITU CUBE WL, E27	376	HELIA AMBIENT 35 PD, PHASE	300
FITU PD, E27	295	HELIA CW, DOUBLE, PHASE	809
FLAC BEAM® SP	693	HELIA CW, SINGLE, PHASE	809
FLATT 100 POLE	679	HELIA SPOT L SP, SINGLE, PHASE	699
FLATT 65 POLE	679	HELIA SPOT S SP, SINGLE	699
FLATT SENSOR WL	760	HORN DL, DOUBLE, QPAR51	219
FLATT WL	760	HORN DL, SINGLE, QPAR51	219, 220
FLOODI L SP	691	HORN EL, SINGLE, QPAR51	220
FLOODI M SP	691	HORN MAGNA EL	221
FLOODI S SP	691	HORN MINI EL	218
FORCHINI 50 PD, E27	312	HORN-T EL, QPAR111	221
FORCHINI 70 PD, E27	312		
FORCHINI M 40 PD, E27	313	I	
FORCHINI M 40 TRACK 1-PHASE, E27	512	I-PENDANT PRO PD, 1195X295MM, DALI	289
FORCHINI M 40 TRACK 3-PHASE, PD, E27	554	I-RING POLE	613
		I-RING WL	714
G			
GALEN 120 SP	692	K	
GALEN 60 SP	692	KADUX DL, DOUBLE, PHASE	213
GIMBLE OUT EL	849	KADUX DL, SINGLE, PHASE	213
GLENOS® 60 WL	339	KADUX DL, TRIPLE, PHASE	213
GLENOS® PD, 1M, 1-10V	291	KADUX EL, DOUBLE, QPAR111	215
GLENOS® PD, 2M, 1-10V	291	KADUX EL, DOUBLE, QPAR51	214
GLOO PURE 27 POLE, E27	655	KADUX EL, SINGLE, QPAR111	215
GLOO PURE 44 POLE, E27	655	KADUX EL, SINGLE, QPAR51	214
GLOO PURE 70 POLE, E27	655	KADUX EL, TRIPLE, QPAR51	214
GLOO PURE WL, E27	777	KALU CW, DOUBLE, PHASE	403
GRAFIT 30 POLE, E27	637	KALU CW, DOUBLE, QPAR111	405
GRAFIT 30 POLE, ROUND, E27	635	KALU CW, QUAD, PHASE	403
GRAFIT 60 POLE, E27	637	KALU CW, QUAD, QPAR111	405
GRAFIT 60 POLE, ROUND, E27	635	KALU CW, SINGLE, PHASE	403
GRAFIT 90 POLE, E27	637	KALU CW, SINGLE, QPAR111	405
GRAFIT 90 POLE, ROUND, E27	635	KALU CW, TRIPLE, PHASE	403
GRAFIT WL, E27	743	KALU CW, TRIPLE, QPAR111	405
GRAFIT WL, SQUARE, SENSOR, E27	743	KALU TRACK 1-PHASE, PHASE	520
GRAFIT WL, ROUND, E27	742	KALU TRACK 1-PHASE, QPAR111	520
GRAFIT WL, ROUND, SENSOR, E27	742	KALU TRACK 3-PHASE, QPAR111	558
GRAZIA FLEXSTRIP LED 24V	582	KALU TRACK LED 3-PHASE, PHASE	558
GRAZIA IP FLEXSTRIP 24V	591	KARPO 30 CW, SINGLE	399
GRAZIA IP FLEXSTRIP RGBW, 24V	591	KARPO 30 EL	232
GRAZIA PRO FLEXSTRIP 24V	583, 584	KARPO 30 WL, SINGLE	383
GRAZIA PRO FLEXSTRIP RGBW, 24V	589	KARPO FL	452
GRAZIA PRO FLEXSTRIP		KARPO GOOSE WL	382
TUNABLE WHITE, 24V	587	KARPO MAGN CW, SINGLE, PHASE	382
GRAZIA PRO MAX FLEXSTRIP 24V	585, 586	KARPO TL	452
GRAZIA 10 SURFACE-MOUNTED		KARPO WL	383
PROFILE 2M	567	KENKUA SPOT WL, E27	381
GRAZIA 10 SURFACE-MOUNTED		KERAS EL WL, E27	779
PROFILE, STANDARD	567	KINI EL, PHASE	237
GRAZIA 10 RECESSED PROFILE	567		
GRAZIA 10 EDGE ACCESSORIES	569		
GRAZIA 10 EDGE 2 M	570		
GRAZIA 10 RECESSED PROFILE	567		
GRAZIA 10 EDGE ACCESSORIES	571		
GRAZIA 20 SURFACE-MOUNTED			
PROFILE, FLAT, 3M	573		
GRAZIA 20 SURFACE-MOUNTED			
PROFILE, STANDARD, 3M	573		
GRAZIA 20 RECESSED PROFILE 3M	573		
GRAZIA 20 ACCESSORIES	574, 575		
GRAZIA 60 SURFACE-MOUNTED PROFILE	577		
GRAZIA 60 RECESSED PROFILE	577		
GRAZIA 60 ACCESSORIES	578, 579		
L			
L-LINE 120 WL		L-LINE 120 WL	341
L-LINE 60 WL		L-LINE 60 WL	341
L-LINE OUT 30 FL, VERTICAL		L-LINE OUT 30 FL, VERTICAL	650
L-LINE OUT 50 POLE, HORIZONTAL		L-LINE OUT 50 POLE, HORIZONTAL	651
L-LINE OUT 60 FL, VERTICAL		L-LINE OUT 60 FL, VERTICAL	651
L-LINE OUT 80 POLE, HORIZONTAL		L-LINE OUT 80 POLE, HORIZONTAL	651
L-LINE OUT WL		L-LINE OUT WL	775
LALU® CONE 15 LAMP SHADE		LALU® CONE 15 LAMP SHADE	178
LALU® ELYPSE 15 LAMP SHADE		LALU® ELYPSE 15 LAMP SHADE	178
LALU® ELYPSE 22 LAMP SHADE		LALU® ELYPSE 22 LAMP SHADE	178
LALU® ELYPSE 33 LAMP SHADE		LALU® ELYPSE 33 LAMP SHADE	178
LALU® PD, E27		LALU® PD, E27	183
LALU® PD, LED BASE, PHASE		LALU® PD, LED BASE, PHASE, RECESSED	177
LALU® PLATE 15 LAMP SHADE		LALU® PLATE 15 LAMP SHADE	178
LALU® PLATE 22 LAMP SHADE		LALU® PLATE 22 LAMP SHADE	178
LALU® SHADE, E27 BASE		LALU® SHADE, E27 BASE	183
LALU® TETRA 14 LAMP SHADE		LALU® TETRA 14 LAMP SHADE	178
LALU® TETRA 24 LAMP SHADE		LALU® TETRA 24 LAMP SHADE	178
LALU® TETRA 36 LAMP SHADE		LALU® TETRA 36 LAMP SHADE	178
LAMPS			
LED A60 E27		LED A60 E27	864
LED A60 E27		LED A60 E27	864
LED A60 E27		LED A60 E27	864
LED A60 E27, MIRRORHEAD, CHROM		LED A60 E27, MIRRORHEAD, CHROM	865
LED A60 E27, RGBW, SMART		LED A60 E27, RGBW, SMART	864
LED A60 E27, TUNABLE 2700-6500K, SMART		LED A60 E27, TUNABLE 2700-6500K, SMART	864
LED C35 E14		LED C35 E14	860
LED C35 E14		LED C35 E14	860
LED G125 E27		LED G125 E27	865
LED GU10		LED GU10	862
LED GU10		LED GU10	862
LED GU10		LED GU10	862



LED QPAR111 GU10	863	M-POL S POLEHEAD, DALI	617
LED QPAR111 GU10	863	M-POL S POLEHEAD, LOUVER	618
LED QPAR111 GU10	863	M-POL S POLEHEAD, LOUVER, DALI	618
LED QPAR111 GU10	862	M-POL S POLEHEAD, SHADER	617
LED QPAR111 GU10	863	M-POL S POLEHEAD, SHADER, DALI	617
LED QPAR111 GU10	863	MAGANDA TL	453
LED QPAR111 GU10	864	MAGANDA WL	337
LED QPAR51 GU10	861	MANA BASE WL, ROUND, PHASE	720
LED QPAR51 GU10	862	MANA OUT WL, PHASE	721
LED QPAR51 GU10, RGBW, SMART	861	MANA OUT WL, SET	721
LED QPAR51 GU10, TUNABLE 2700-6500K, SMART	861	MARONA CL, PHASE	273
LED QR51 GU5.3	861	MARYLIN 40/60/90 WL	333
LED QT14 G9	860	MEDO® 30 CW, PHASE	161
LED QT-DE12 R7S, 118 MM	860	MEDO® 30 EL, MOUNTING FRAME	171
LED QT-DE12 R7S, 78 MM	860	MEDO® 30 EL, FRAMELESS	170
LED ST58 E27	865	MEDO® 40 CW, PHASE	161
LED ST64 E27	865	MEDO® 40 EL, MOUNTING FRAME	171
LED T32 GU10	861	MEDO® 40 EL, FRAMELESS	170
LED T38 E27	865	MEDO® 60 CL, SQUARE, 1-10V	165
LED T45 E27	865	MEDO® 60 CL, SQUARE, DALI	165
LED TCR-TSE GX53	860	MEDO® 60 CW, PHASE	161
QPAR111 GU10, RGBW, SMART	862	MEDO® 60 EL, MOUNTING FRAME	171
QPAR111 GU10, RGBW, SMART	862	MEDO® 60 EL, FRAMELESS	170
QPAR111 GU10, TUNABLE 2700-6500K, SMART	863	MEDO® 90 CL, PHASE	161
LED PANEL 620X620MM	243	MEDO® PRO 30 CW, DALI	152
LED SPIKE SP	701	MEDO® PRO 30 CW, DALI, UGR<19	150
LED SPOT SP	785	MEDO® PRO 30 CW, DALI, UGR<19, DC	157
LID I 45 POLE, SINGLE	611	MEDO® PRO 30 CW, PHASE	152
LID I 75 POLE, DOUBLE	611	MEDO® PRO 30 CW, PHASE, UGR<19	150
LID I WL, DOUBLE	713	MEDO® PRO 40 CW, DALI	152
LID I WL, SINGLE	713	MEDO® PRO 40 CW, DALI, UGR<19	150
LID II WL	711	MEDO® PRO 40 CW, DALI, UGR<19, DC	157
LID II WL, UP/DOWN	711	MEDO® PRO 40 CW, DALI, UGR<19, PHASE	153
LIGHT EYE® 150 1-PHASE, PD, QPAR111	511	MEDO® PRO 40 CW, PHASE, UGR<19, UGR<19	151
LIGHT EYE® 150 PD, QPAR111	314	MEDO® PRO 40 CL, DALI	153
LIGHT EYE® 90 1-PHASE, QPAR51	511	MEDO® PRO 90 CL, DALI, UGR<19	151
LIGHT EYE® 90 PD, GU10	314	MEDO® PRO 90 CL, DALI, UGR<19, DC	157
LIPSY® 30 CW, DOME	423	MEDO® PRO 90 CL, PHASE	153
LIPSY® 30 CW, DRUM	425	MEDO® PRO 90 CL, PHASE, UGR<19	151
LIPSY® 40 CW, DOME	423	MEDO® RING 60 PD, 1-10V	167
LIPSY® 40 CW, DRUM	425	MEDO® RING 60 PD, DALI	167
LIPSY® 40 CW, DRUM, DALI	426	MEDO® RING 90 PD, 1-10V	167
LIPSY® 50 CW, DOME	423	MELAN CW, E27	427
LIPSY® 50 CW, DRUM	425	MERADO FLOOD WL, PHASE	388
LIPSY® 50 CW, DRUM, DALI	426	MERIDIAN BOX SENSOR WL, E27	747
LISENNE 40 POLE, E27	662	MERIDIAN BOX WL, E27	746, 747
LISENNE PD, E27	306	MERIDIAN WL, E27	746
LISENNE WL, E27	375	MIBO UP/DOWN WL, QT14	337
LITTLE SUN TL	443	MILANDOS 4 DL	217
LOGS 40 POLE	633	MILANDOS 6 DL	217
LOGS 70 POLE	633	MILANDOS 8 DL	217
LOGS IN L WL, PHASE	363	MOBALA EL	243
LOGS IN WL	362	MOLAT CL, E27	799
LOGS IN WL, PHASE	362	MOLAT PD, E27	661
LOGS WL	775	MOLAT POLE, E27	661
LONG GRILL CW	430	MOLAT WL, E27	777
LYGANT WL, DOUBLE	325	MYRA CW, SINGLE, QPAR51	785
LYGANT WL, SINGLE	325	MYRA DISPLAY WL, CURVED, QPAR51	783
M		MYRA SPOT DOUBLE, GU10	685
M-POL 30 POLE	623	MYRA UP/DOWN WL, QPAR51	764
M-POL 60 POLE	623	MYRA WL, DOUBLE, QPAR51	811
M-POL 90 POLE	623	NAGY 75 CL, QPAR51	261
M-POL M POLEHEAD	619		
M-POL M POLEHEAD, DALI	619	N	
M-POL M POLEHEAD, LOUVER	621	NAUTILUS 10 SP, SQUARE	696
M-POL M POLEHEAD, LOUVER, DALI	621	NAUTILUS 10 SP, ROUND, QPAR51	694, 695
M-POL M POLEHEAD, SHADE	620	NAUTILUS 10 SPOT LED SP	697
M-POL M POLEHEAD, SHADE, DALI	620	NAUTILUS 10 SPOT SP, QPAR51	697
M-POL S POLEHEAD	616	NAUTILUS SP, QR-C51	697
M-POL S POLEHEAD 180°, GLARE REDUCTION	615	NAUTILUS WL QPAR51	785
M-POL S POLEHEAD 180°, GLARE REDUCTION, DALI	615	NEW TRIA® 150 DL, SQUARE, QPAR111	145
M-POL S POLEHEAD 360°, GLARE REDUCTION	614	NEW TRIA® 150 DL, ROUND, QPAR111	145
M-POL S POLEHEAD 360°, GLARE REDUCTION, DALI	614	NEW TRIA® 155 DL, DOUBLE, QPAR51	141
NEW TRIA® 155 DL, DOUBLE, QPAR51	145	NEW TRIA® 155 DL, ROUND, QPAR51	145
NEW TRIA® 300 DL, DOUBLE, QPAR111	145	NEW TRIA® 45 DL, ROUND	141
NEW TRIA® 45 DL, ROUND	135	NEW TRIA® 68 DL, SQUARE, DTW, PHASE	135
NEW TRIA® 68 DL, SQUARE, PHASE	134	NEW TRIA® 68 DL, SQUARE, PHASE	138
P		PANEL CL, 1200X300MM, DALI	275
PANEL CL, 1200X300MM, PHASE	275	PANEL TRACK 1-PHASE, SQUARE	507

PANEL TRACK 1-PHASE, ROUND	507	QUADRASYL WL, TCR-TSE	781
PANTILO 20 PD, E27	281	QUADRULO CL	811
PANTILO 28 PD, E27	281	QUADRULO FL	639
PANTILO CONVEX 29 PD, E27	283	QUADRULO SENSOR WL, E27	745
PANTILO CONVEX 40 PD, E27	283	QUADRULO WL	744
PANTILO OVAL PD, E27	281	QUADRULO WL, E27	745
PANTILO ROPE 19 CW, E27	393		
PANTILO ROPE 19 PD, E27	279	R	
PANTILO ROPE 20 PD, E27	279	R-CUBE 35 POLE	609
PANTILO ROPE 27 CW, E27	393	R-CUBE 75 POLE	609
PANTILO ROPE 27 PD, E27	279	R-CUBE CW	805
PANTILO ROPE WL, G9	345	RASCALI 45 POLE	684
PARA 380 PD, E27	319	RASCALI 65 POLE	684
PARA CONE 14 1-PHASE, PD, QPAR51	509	RASCALI WL	780
PARA CONE 14 1-PHASE, QPAR51	509	ROCCI 200 EL, SQUARE	855
PARA CONE 14 3-PHASE, PD, QPAR51	553	ROCCI 200 EL, ROUND	855
PARA CONE 14 3-PHASE, QPAR51	553	ROCCI EL, SQUARE	854
PARA CONE 20 PD, E27	309	ROCCI EL, ROUND	854
PARA CONE 30 PD, E27	309	ROTOBALL 25 FL, E27	657
PARA CONE GL 1-PHASE, GU10	508	ROTOBALL 25 PD, E27	317
PARA CONE GL 3-PHASE, GU10	552	ROTOBALL 40 FL, E27	657
PARA CONE GL PD, GU10	309, 508, 552	ROTOBALL 40 PD, E27	317
PARA DOME PD, E27	318	ROTOBALL 50 FL, E27	657
PARA DOME SHADE	318	ROTOBALL 50 PD, E27	317
PATTA-I EL, ROUND, PHASE	244, 245	ROX ACRYL 30 POLE, E27	669
PATTA-I EL, SQUARE, PHASE	244, 245	ROX ACRYL 60 POLE, E27	669
PATTA-F EL, ROUND, PHASE	246	ROX ACRYL 90 POLE, E27	669
PATTA-F EL, SQUARE, PHASE	247	ROX CL, GX53	801
PEMA® WL	758, 759	ROX CL, QPAR111	801
PEMA® WL, E27	759	ROX UP/DOWN WL, QPAR111	767
PHELIA 10 PD, E27	310	ROX WL, QPAR111	767
PHELIA 20 PD, E27	311	RUBA CW	814
PHELIA 25 PD, E27	311	RUSTY® 40 POLE	642
PHELIA 30 PD, E27	311	RUSTY® 40 POLE, E27	643, 646
PHELIA FL, E27	453	RUSTY® 70 POLE	643
PHELIA WL, QPAR51	388	RUSTY® 70 POLE, E27	643, 646
PHOTONI 45 POLE, E27	605	RUSTY® CONE 24 FL, E14	645
PHOTONI 75 POLE, E27	605	RUSTY® CONE 40 POLE, E27	645
PHOTONI CL, E27	789	RUSTY® CONE 70 POLE, E27	645
PHOTONI WL, E27	709	RUSTY® MANA SHADE, SQUARE	720
PHOTONIA CL, E27	799	RUSTY® MANA SHADE, ROUND	720
PHOTONIA PD, E27	659	RUSTY® PATHLIGHT POLE, TCR-TSE	642
PHOTONIA POLE, E27	659	RUSTY® SLOT 50 POLE	640
PHOTONIA WL, E27	777	RUSTY® SLOT 50 POLE, E27	641
PLASTRA 101 WL, E14	361	RUSTY® SLOT 80 POLE	640
PLASTRA 104 CL, E27	271	RUSTY® SLOT 80 POLE, E27	641
PLASTRA 104 WL, QT14	361	RUSTY® UP/DOWN WL, SQUARE	756
PLASTRA 105 CL, E27	271	RUSTY® UP/DOWN WL, ROUND	756
PLASTRA CL, PHASE	271	S	
PLASTRA CL, QPAR51	270	S-CUBE 35 POLE	607
PLASTRA WL, CUBE, QT14	356	S-CUBE 75 POLE	607
PLASTRA WL, CUBES	356	S-CUBE CL	791
PLASTRA WL, CURVE, QT-DE12	361	S-CUBE CW	805
PLASTRA WL, E14	357	S-TUBE 32 POLE, GU10	603
PLASTRA WL, QPAR51	360	S-TUBE 75 POLE, GU10	603
PLYTTA LV	490	S-TUBE CW	805
POWER TRAIL-LITE® EL, SQUARE	849	SALUNA LV, QR-C51	489
POWER TRAIL-LITE® EL, ROUND	849	SAMRINA SP, SINGLE, GU10	693
PURI CW, DOUBLE, QPAR51	411	SEDO 14 WL	329
PURI CW, QUAD, QPAR51	411	SEDO 21 WL	329
PURI CW, SINGLE, QPAR51	411	SEDO 7 WL	329
PURI CW, TRIPLE, QPAR51	411	SHELL 15 WL, PHASE	365
PURI TRACK 1-PHASE, QPAR51	513	SHELL 30 WL, PHASE	365
PURI TRACK 1-PHASE, TRIPLE TRACK SET	513	SIGHT 115 CW	431
PURI TRACK 3-PHASE, QPAR51	557	SIGHT 60 CW	431
PURI TRACK GLASS 3-PHASE, QPAR51	557	SIGHT MOVE 3-PHASE	551
PURI TRACK 1-PHASE, QPAR51	515	SIGHT MOVE 3-PHASE, DALI	551
Q		SIGHT TRACK 3-PHASE	550
Q-LINE® CL, 1M, BAP, PHASE	253	SIGHT TRACK 3-PHASE, DALI	550
Q-LINE® CL, 2M, BAP, PHASE	253	SITRA 360 CW, TCR-TSE	808
Q-LINE® PD, 1M, BAP, PHASE	293	SITRA 360 POLE, TCR-TSE	685
Q-LINE® PD, 2M, BAP, PHASE	293	SITRA 360 SPIKE SP, DOUBLE, TCR-TSE	703
Q-LINE® PD, DALI, SINGLE	293	SITRA 360 SPIKE SP, SINGLE, TCR-TSE	703
Q-LINE® WL	341	SITRA CL, TCR-TSE	801
QUAD FRAME 14 WL	364	SITRA CUBE WL, TCR-TSE	741
QUAD FRAME 19 WL	364	SITRA L WL, UP/DOWN, SQUARE	741
QUAD FRAME 9 WL	240	SITRA M WL, UP/DOWN, SQUARE	741
QUAD POLE	683	SITRA S WL, SINGLE, SQUARE	739
QUAD UP/DOWN 15 WL	753	SITRA UP/DOWN WL	765
QUAD WL	752	SITRA UP/DOWN WL, TCR-TSE	765
QUADRASS PD, E27	307	SITRA WL, TCR-TSE	779
QUADRASS SPOT WL, E27	375	SLOTBOX 40 POLE	678
QUADRASS WL, E27	375	SLOTBOX 70 POLE	678
QUADRASYL 75 POLE, TCR-TSE	682	SLOTS 45 POLE	675
		SLOTS 65 POLE	675
		SLOTS WL	768
		SMALL PLOT COVER, 2-PACK	851
		SMALL PLOT COVER, 4-PACK	851
		SMALL PLOT MODULES	851
		SOLASTO EL, SQUARE	857
		SOLASTO EL, ROUND	857
		SOLID CUBE WL, QT14	377
		SOPRANA CL, E27	269
		SPOT 79 CW, QPAR51	409
		SQUARE POLE 30 POLE, E27	673
		SQUARE POLE 60 POLE, E27	673
		SQUARE POLE 90 POLE, E27	673
		SQUARE TURN WL, G9	781
		SQUARE WL, E27	779
		SUN / BIG SUN PD, E27	315
		SYNA GARDEN SP	689
		SYNA PLANT SP	689
		SYNA SP	689
		SYROS LV, QR-C51	489
		T	
		TAHA LIGHT SET, BATTERY-POWERED	441, 601
		TELESKOP LV, QR-C51	486
		TENORA CL, E27	268
		TENSEO LOW-VOLTAGE CABLE	482-484
		TENSEO LOW-VOLTAGE CABLE	
		ACCESSORIES	485
		TERANG 200 CW	817
		THEO BRACKET CW	808
		THEO BRACKET SP	701
		THEO PATHLIGHT POLE, DOUBLE	652
		THEO UP/DOWN WL, QPAR51	377, 735
		THEO WL, QPAR51	736
		TINY SUN TL	443
		TODAY PRO DISPLAY	783
		TONGA® 1-PHASE, PD, E14	511
		TONGA® PD, E14	307
		TONILA TL	453, 601
		TRAIL-LITE® 60 EL	848
		TRUKKO 60 WL	332
		TRUKKO 90 WL	332
		TRUST 30 POLE	667
		TRUST 60 POLE	667
		TS V 3-PHASE	543
		U	
		UNIVERSAL DOWNLIGHT DL	
		WITH COVER, MULTIPACK	208, 209
		UNIVERSAL DOWNLIGHT DL,	
		MOVE, PHASE	207
		UNIVERSAL DOWNLIGHT DL, PHASE	205
		V	
		VANO WING SP, DALI	719
		VAP SLIM 30 POLE, E27	671
		VAP SLIM 60 POLE, E27	671
		VAP SLIM 90 POLE, E27	671
		VARU EL, QPAR51	234
		VARYT CL, E14	251
		VARYT TL, E14	443
		VARYT WL, E14	327
		VILUA L WL	763
		VILUA S WL	763
		VILUA UP/DOWN, WL	763
		VINOLINA ONE TL, BATTERY	437, 597
		VINOLINA TL, BATTERY	437, 597
		VINOLINA TWO TL, BATTERY	439, 599
		W	
		WALLYX WL, QPAR51	768
		WL 106 E14	335
		WL 149 WL, PHASE	334
		WL 149 WL, QT-DE12	334
		WORKLIGHT FL	445
		WORKLIGHT PD, DALI	288
		WORKLIGHT PRO 120 PD, DALI	287
		WORKLIGHT PRO 150 PD, DALI	287
		WORKLIGHT PRO FL, DOUBLE	444
		WORKLIGHT PRO FL, SINGLE	444
		WORKLIGHT TL	445
		WORO EL	243

SYMBOLS KEY

	Recommendations Displays accessories and recommended lamps for the chosen product		Power cable length in cm Supply cable length in cm (with open cable end)
	Mix & Match Indicates products that can be combined		Shape of the installation opening
	Energy efficiency class „This light is suitable for bulbs with an energy class rating of ...“		Specification of the installation depth
	Dimmable with: <ul style="list-style-type: none">· C = Trailing-edge phase dimmer· L = Leading-edge phase dimmer· Uni = Universal dimmer· 1-10 V· DALI = DALI bus system· Switch = Switch/button or touch control on the light		Product's capacity to be driven over specified
	Protection classes <ul style="list-style-type: none">· Protection class I / Protective conductor· Protection class II / Protection by double or reinforced insulation· Protection category III / Protection through low voltage		Allows the installation of electrical control equipment on materials whose flammability is not known.
	IP protection type: Indicates the suitability of electrical equipment for different environmental conditions.		Through-wiring possible
	IK impact resistance rating The IK impact resistance rating is a measure of the resistance of housings for electrical equipment to mechanical stress, especially impact stress.		Independent converter: Control equipment also for use outside of lights
	Half-diffusion angle: Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.		Short-circuit protected safety control equipment
	Rotation and pivoting capacity in degrees: <ul style="list-style-type: none">· Rotation range· Pivot range· Gimbaled		For indoor use only Not suitable for indoor use
	Unified Glare Rating: The lower the UGR value, the lower the psychological glare.		Connected lighting: Indicates smart products that use the following protocols: <ul style="list-style-type: none">· Zigbee®· DALI· Bluetooth
	Preservation of luminous flux: Describes the amount by which the luminous flux of an LED decreases during a specified period.		CCTswitch: By means of an integrated CCT switch, the light colour can be changed from 2700 K, 3000 K, 4000 K to 6500 K during installation.
	Pendant cable length in cm		Indicates lights with RGB+W and RGB (red-green-blue + white and red-green-blue)
	Dim-to-Warm: With dimmers, the light colour can be altered from cold white to warm white.		
			<ul style="list-style-type: none">· Products with integrated LEDs· Products with lamp socket

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. Product descriptions and specifications are subject to correction and amendment.

All products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.


The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated in Euro without VAT.

Publisher
SLV GmbH, Germany
Daimlerstraße 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833-0
slv.com

Copyright
© SLV GmbH, 2023



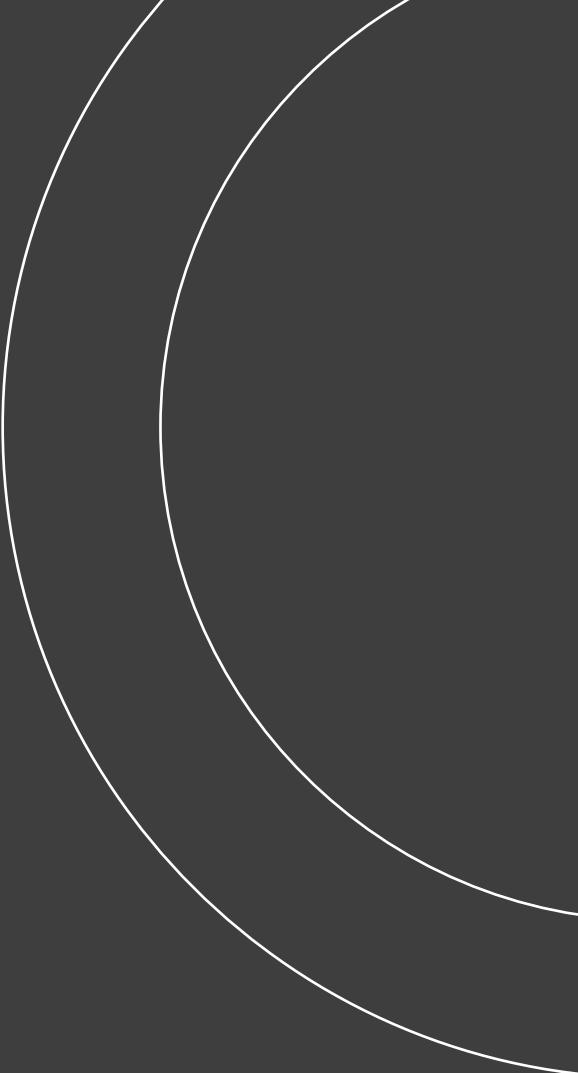

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833-333, info@slv.de
SLV Austria | +49 (2451) 4833 355, export@slv.de
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com
SLV France | Zac du Martelet, 88, rue Henri Dépagneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LO), +39 039 5983575, infoit@slv.com
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl
SLV i Norge, del av SLV Nordics | Tors veg 9B, 7035 Trondheim, +47 4777 1080, post-no@slv.com
SLV Poland | +48 (22) 7224975, slv@slv.pl
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si
SLV Spain | Antic Camí Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com